
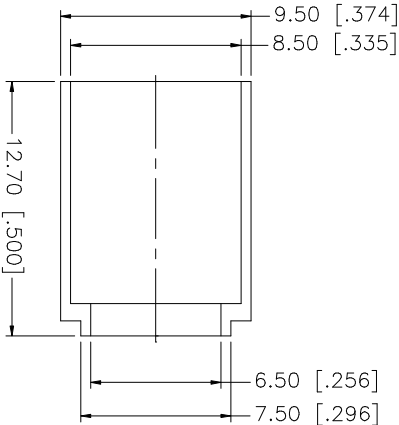
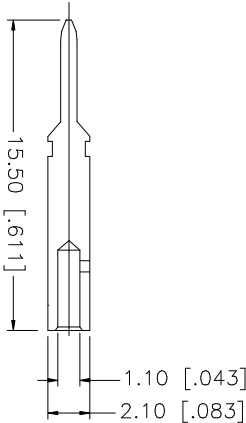
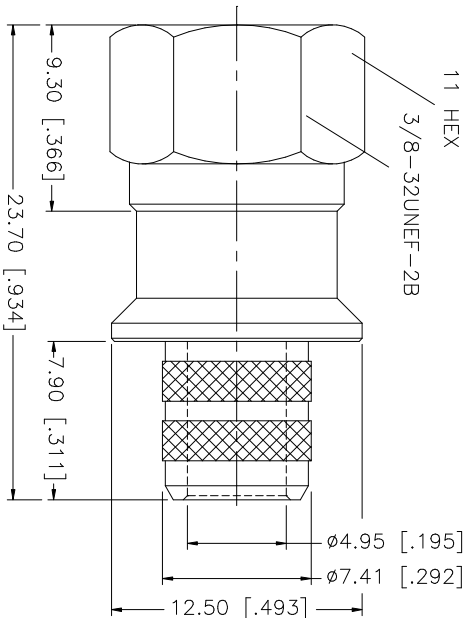


REV.	DATE	DESCRIPTION
NC	04/14/04	INITIAL RELEASE

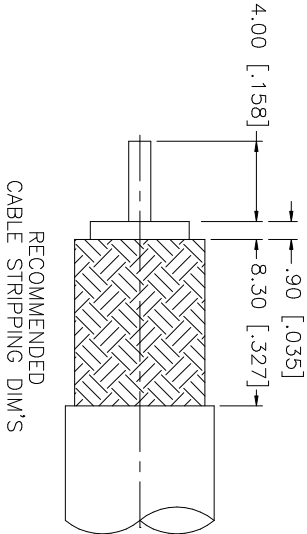

CRIMP NOTES:

1. CRIMPED FERRULE
HEX CRIMP SIZE .324"
2. CRIMPED CONTACT PIN
HEX CRIMP SIZE .068"

8					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN PARENT BRACKETS ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020"
7					
6					
5					
4	FERRULE	BRASS	NICKEL	1	
3	CONTACT PIN	BRASS	GOLD	1	CAD FILE C:/222/222171.DWG
2	INSULATOR	DELFIN	NATURAL	1	
1	BODY	BRASS	NICKEL	1	
	DESCRIPTION	MATERIAL	FINISH	QTY	DO NOT SCALE DRAWING
					APPROVALS DRAWN G.R.S. 04/14/04 CHECKED ISSUED SHEET 1 OF 1
					PART DESCRIPTION F CRIMP PLUG (FOR BELDEN 1695A CABLE) PART NO. 222171
					DWG. NO. 222171.DWG REV. NC SIZE A SCALE NA

Amphenol Connex

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[222171](#)