

PCB terminal block - ZFKDS 2,5-5,08-EX - 1732137

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



PCB terminal block, Nominal current (Ex): 22 A, Nominal voltage (Ex): 137 V, Pitch: 5.08 mm, Number of positions: 1, Connection method: Spring-cage connection, Mounting: Wave soldering, Color: green

Product Features

- Defined contact force ensures that contact remains stable over the long term
- Clamping space opened by means of fixed screwdriver enables convenient conductor connection
- Angled connection enables multi-row arrangement on the PCB
- Satisfies the more stringent safety requirements of "Ex e" protection according to IEC 60079-7 for potentially explosive areas
- The latch on the side enables various numbers of positions to be combined
- Two solder pins reduce the mechanical strain on the soldering spots



Key Commercial Data

Packing unit	1 pc
Minimum order quantity	50 pc
Custom tariff number	85369010
Country of origin	Poland

Technical data

Dimensions

Pitch	5.08 mm
Constructional height	15 mm
Length of the solder pin	3.5 mm
Pin dimensions	0,8 x 0,8
Hole diameter	1.3 mm

General

Range of articles	ZFKDS(A) 2,5-EX
-------------------	-----------------

PCB terminal block - ZFKDS 2,5-5,08-EX - 1732137

Technical data

General

Insulating material group	I
Nominal cross section	2.5 mm ²
Insulating material	PA
Solder pin surface	Sn
Flammability rating according to UL 94	V0
Number of positions	1

Standards and Regulations

Flammability rating according to UL 94	V0
----------------------------------------	----

Classifications

eCl@ss

eCl@ss 4.0	27141111
eCl@ss 4.1	27141109
eCl@ss 5.0	27141190
eCl@ss 5.1	27141190
eCl@ss 6.0	27261101
eCl@ss 7.0	27440401
eCl@ss 8.0	27440401
eCl@ss 9.0	27440401

ETIM

ETIM 3.0	EC001121
ETIM 4.0	EC002643
ETIM 5.0	EC002643

UNSPSC

UNSPSC 6.01	30211801
UNSPSC 7.0901	39121432
UNSPSC 11	39121432
UNSPSC 12.01	39121432
UNSPSC 13.2	39121432

Approvals

Approvals

PCB terminal block - ZFKDS 2,5-5,08-EX - 1732137

Approvals

Approvals

EAC

Ex Approvals

ATEX / IECEX / EAC Ex

Approvals submitted

Approval details

EAC

Accessories

Required add-on products

PCB terminal block - ZFKDSA 2,5-6,08 R-EX - 1732153

PCB terminal block, Nominal current (Ex): 22 A, Nominal voltage (Ex): 125 V, Pitch: 5.08 mm, Number of positions: 1, Connection method: Spring-cage connection, Mounting: Wave soldering, Color: green

Additional products


PCB terminal block - ZFKDS 2,5-5,08 L-EX - 1732140

PCB terminal block, Nominal current (Ex): 22 A, Nominal voltage (Ex): 125 V, Pitch: 5.08 mm, Number of positions: 1, Connection method: Spring-cage connection, Mounting: Wave soldering, Color: green


Drawings

PCB terminal block - ZFKDS 2,5-5,08-EX - 1732137

Drilling diagram

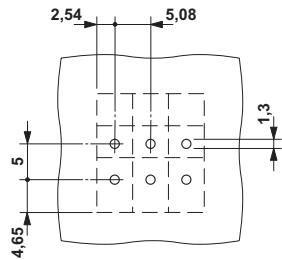

Dimensional drawing

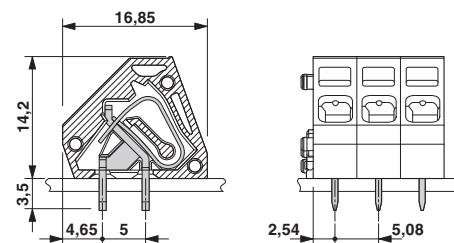

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Phoenix Contact:](#)

[1732137](#)