

PRINTED CIRCUIT TRANSFORMERS

TransGlobal Printed Circuit Mount Transformers



TransGlobal®
Printed Circuit Mount




Designed for single input and single output use only,
and requires simultaneous use of all windings.

STANCOR PART Sec. NUMBER	Primary Voltage	VA	Secondary RMS Rating				Style	DIMENSIONS-INCHES											Weight (lbs.)	Agency Certif.
			Series		Parallel			L	W	H	M	MW	ML	Pin [■]	A	B	C			
A	TG2H-36	115/230	2.5	36.0 C.T. @ 0.07		18.0 @ 0.14	P.C.	1.63	1.31	1.13	1.06	-	-	.025	0.20	0.25	1.00	0.25	† ‡	
	TG05-36	115/230	5	36.0 C.T. @ 0.14		18.0 @ 0.28	P.C.	1.63	1.31	1.38	1.06	-	-	.025	0.20	0.40	1.00	0.38	† ‡	
	TG10-36	115/230	10	36.0 C.T. @ 0.28		18.0 @ 0.56	P.C.	1.94	1.59	1.38	1.25	-	-	.035	0.20	0.40	1.14	0.55	† ‡	
	TG20-36	115/230	20	36.0 C.T. @ 0.56		18.0 @ 1.12	P.C.	2.25	1.88	1.63	1.50	-	-	.035	0.40	0.40	1.46	0.95	† ‡	
	TG30-36	115/230	30	36.0 C.T. @ 0.82		18.0 @ 1.64	P.C.	2.63	2.19	1.59	-	1.75	2.19	.040	0.55	0.28	1.68	1.20	† ‡	
	TG56-36	115/230	56	36.0 C.T. @ 1.56		18.0 @ 3.12	P.C.	3.00	2.50	1.84	-	2.00	2.50	.040	0.60	0.30	1.90	1.80	† ‡	

* Agency Certification Note: U.L. recognized component for use in the U.S. and Canada
TUV certified to EN61558 (Report #DI 401341)



■ Pins are square

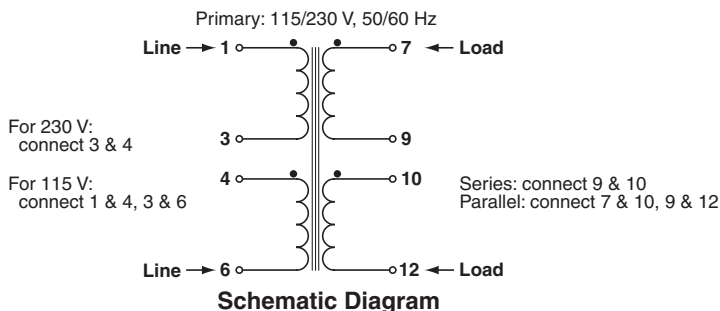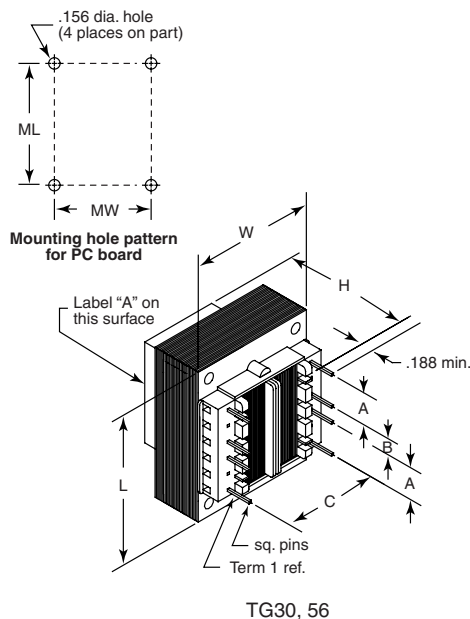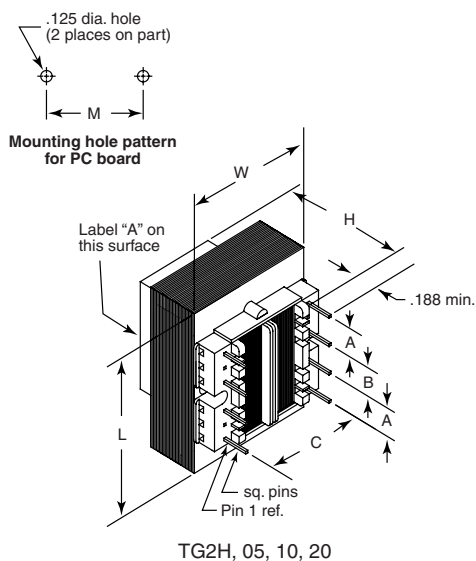

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[White-Rodgers:](#)

[TG10-12](#) [TG20-16](#) [TG20-20](#) [TG20-24](#) [TG2H-10](#) [TG30-12](#) [TG30-24](#) [TG56-10](#) [TG56-24](#) [TG56-36](#) [TG10-36](#)