
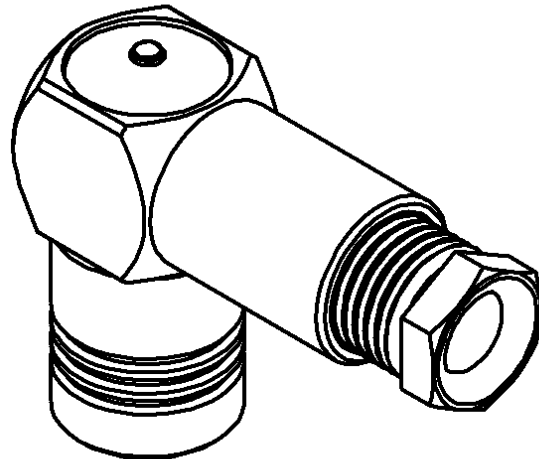



RIGHT ANGLE PLUG CLAMP TYPE

CABLE 2.6/50+75 S

R114.165.000

Series : SMB

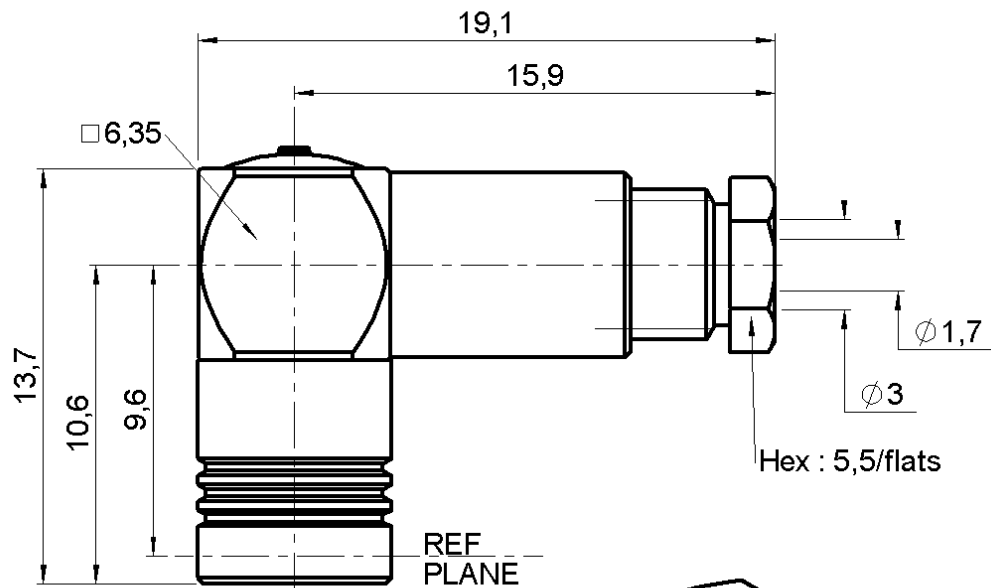

All dimensions are in mm.



COMPONENTS	MATERIALS	PLATINGS (μm)
BODY	BRASS	GOLD 0.2 OVER NICKEL 2
CENTER CONTACT	BERYLLIUM COPPER	GOLD 1.3 OVER NICKEL 2
OUTER CONTACT	BERYLLIUM COPPER	GOLD 0.5 OVER NICKEL 2
INSULATOR	PTFE	
GASKET	-	
OTHERS PARTS	BRASS	GOLD 0.2 OVER NICKEL 2
-	-	-
-	-	-

Issue : 0050 Q

In the effort to improve our products, we reserve the right to make changes judged to be necessary.



RIGHT ANGLE PLUG CLAMP TYPE

CABLE 2.6/50+75 S

R114.165.000

Series : SMB

PACKAGING

Standard	Unit	Other
100	'W' option	Contact us

ELECTRICAL CHARACTERISTICS

Impedance	50	Ω
Frequency	0-4	GHz
VSWR	1.35 + 0.040	x F(GHz) Maxi
Insertion loss	0.50	$\sqrt{F}$ (GHz) dB Maxi
RF leakage	- (57	- F(GHz)) dB mini
Voltage rating	335	Veff Maxi
Dielectric withstanding voltage	1000	Veff mini
Insulation resistance	1000	M Ω mini

MECHANICAL CHARACTERISTICS

Center contact retention	
Axial force – Mating end	10 N mini
Axial force – Opposite end	10 N mini
Torque	NA N.cm mini

Recommended torque

Mating	NA N.cm
Panel nut	NA N.cm
Clamp nut	40 N.cm
A/F clamp nut	5.000 mm

Mating life	500 Cycles mini
Weight	4.800 g

ENVIRONMENTAL

Operating temperature	-65/+165 ° C
Hermetic seal	NA Atm.cm3/s
Panel leakage	NA

SPECIFICATION**CABLE ASSEMBLY**

Stripping	a	b	c	d	e	f
mm	1.50	0.00	4.00	5.00	2.00	0.00

Assembly instruction :

Recommended cable(s)

KX 22A

RG 179

RG 188

RG 187

RG 316

Cable retention

- pull off	110 N mini
- torque	NA N.cm

TOOLING

Part Number	Description	Hexagon
.	.	.

OTHERS CHARACTERISTICS

-

Issue : 0050 Q

In the effort to improve our products, we reserve the right to make changes judged to be necessary.




RIGHT ANGLE PLUG CLAMP TYPE

CABLE 2.6/50+75 S

R114.165.000

Series : SMB

COMPONENTS

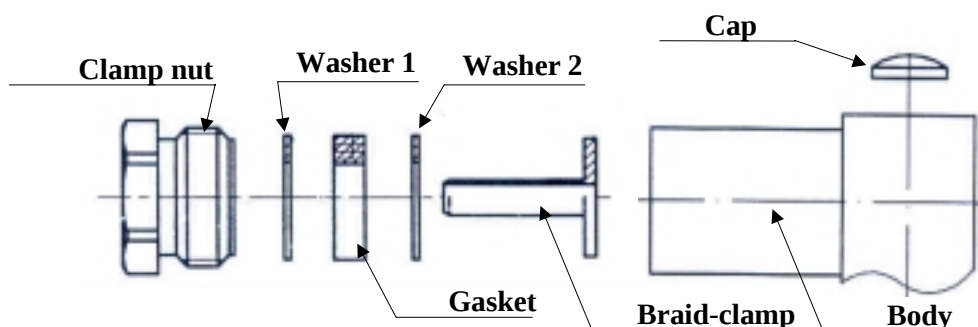


1

Slide the back nut, the washer 1, the gasket, the washer 2 onto the cable.

Strip the cable.

Cut 2 slits in the jacket if necessary.

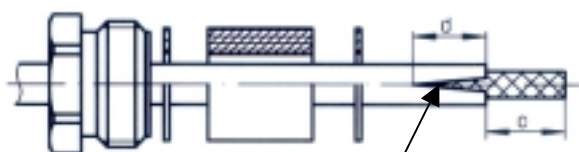


2 slits at 180°

3

Screw sub-assembly into the connector body with the adapted wrench.

Recommended coupling torque (see connector TDS).

Solder the inner conductor.

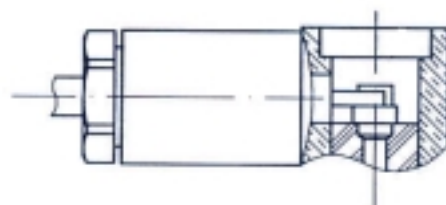


2

Mount the braid-clamp

Trim braid to Ø of braid-clamp


Strip off the dielectric

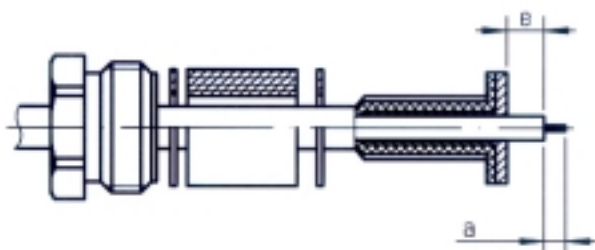

4

Place the cap into the body.

Press on the cap flush or slightly below the surface of the body assembly.

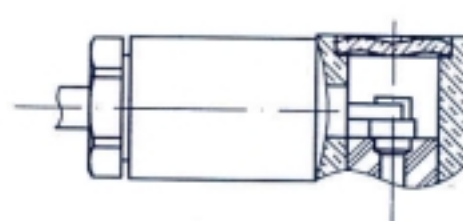

Issue : 0050 Q

In the effort to improve our products, we reserve the right to make changes judged to be necessary.



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Radial:

[R114165000](#)