



LOC E	DIST B	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
			C	ECR-05-017969	13DEC05	JMS	FWK

NOTES:

- 1 PACK IN ACCORDANCE WITH AMP SPEC 107-3275
- 2 100 TRAY PACK IN ACCORDANCE WITH AMP SPEC 107-3275
- 3 Ag PLATING
- 4 ELECTRICAL CHARACTERISTICS
FREQUENCY RANGE: DC - 4 GHz
NOMINAL IMPEDANCE: 50 Ohm
INSULATION RESISTANCE: 5000 MOhm
WORKING VOLTAGE: 500 Volts RMS at Sea Level
DIELECTRIC WITHSTAND VOLTAGE: 1500 Volts RMS Max
CONTACT RESISTANCE:
CENTRE CONTACT: 1.50 mOhm Max
OUTER CONTACT: 0.20 mOhm Max
VSWR @ xGHz: N/A
INSERTION LOSS xdb: N/A
- 5 MECHANICAL CHARATERISTICS
COUPLING RETENTION FORCE: N/A
CABLE RETENETION FORCE: N/A
DURABILITY: 500 Cycles Min
- 6 ENVIRONMENTAL CHARACTERISTICS
OPERATING TEMPERATURE: -65 to +165 DegC

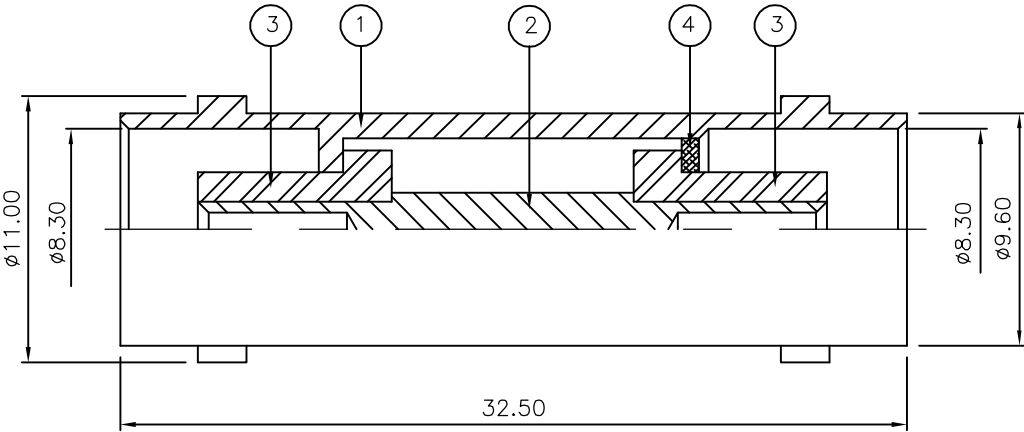

		1	1	BRASS	1	SLEEVE	4
		2	2	PTFE	1	INSULATION	3
		1	1	BRASS	1	CONTACT	2
		1	1	BRASS	1	BODY	1
		6--0	1--0	MATERIAL	DESCRIPTION	ITEM	
QUANTITY PER ASSY				PARTS LIST			

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J.SANDWELL 13DEC05	tyco Electronics Tyco Electronics Corporation Bideford EX39 4HE			
		CHK S.PARLOW 13DEC05				
DIMENSIONS: mm		APVD F.WHEELER-KING 13DEC05	NAME BNC STRAIGHT ADAPTOR J-J 50 OHM			
		PRODUCT SPEC —				—
		APPLICATION SPEC —	—			
MATERIAL SEE TABLE	FINISH —	WEIGHT —	SIZE A3	CAGE CODE 00779	DRAWING NO C-1337457	RESTRICTED TO —
CUSTOMER DRAWING			SCALE NTS	SHEET 1 OF 1	REV C	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-1337457-0](#)