


PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION

**Part Number:** [0760553614](#)  
**Status:** **Active**  
**Overview:** [Impact™ Backplane Connectors and Cable Assemblies](#)  
**Description:** Impact 100 Ohm 5 Pair Vertical Backplane Header, Left Guided, Open Endwall, 16 Columns, 240 Circuits, Pin Length 4.90mm, Plated Through Hole Dimension 0.46mm, Key Orientation A, Lead-Free

**Documents:**  
[3D Model](#)  
[Drawing \(PDF\)](#)  
[Product Specification PS-76060-999-001 \(PDF\)](#)  
[Application Specification AS-76060-990-001 \(PDF\)](#)  
[Application Specification AS-76060-9999-001 \(PDF\)](#)  
[Packaging Specification PK-70873-759 \(PDF\)](#)  
[RoHS Certificate of Compliance \(PDF\)](#)

|                                |                                                                   |
|--------------------------------|-------------------------------------------------------------------|
| <b>Agency Certification</b>    |                                                                   |
| UL                             | E29179                                                            |
| <b>General</b>                 |                                                                   |
| Product Family                 | Backplane Connectors                                              |
| Series                         | <a href="#">76055</a>                                             |
| Application                    | Conventional, Mezzanine                                           |
| Application Tooling Documents  | TM-622018799                                                      |
| Component Type                 | PCB Header                                                        |
| Overview                       | <a href="#">Impact™ Backplane Connectors and Cable Assemblies</a> |
| Product Name                   | Impact                                                            |
| UPC                            | 883906523701                                                      |
| <b>Physical</b>                |                                                                   |
| Circuits (Loaded)              | 240                                                               |
| Circuits (maximum)             | 240                                                               |
| Color - Resin                  | Black                                                             |
| Durability (mating cycles max) | 200                                                               |
| First Mate / Last Break        | No                                                                |
| Flammability                   | 94V-0                                                             |
| Guide to Mating Part           | Yes                                                               |
| Keying to Mating Part          | Yes                                                               |
| Material - Metal               | High Performance Alloy (HPA)                                      |
| Material - Plating Mating      | Gold                                                              |
| Material - Plating Termination | Tin                                                               |
| Material - Resin               | High Temperature Thermoplastic                                    |
| Net Weight                     | 9.094/g                                                           |
| Number of Columns              | 16                                                                |
| Number of Pairs                | 5                                                                 |
| Number of Rows                 | 15                                                                |
| Orientation                    | Vertical                                                          |
| PC Tail Length                 | 1.40mm                                                            |
| PCB Locator                    | No                                                                |
| PCB Retention                  | Yes                                                               |
| PCB Thickness - Recommended    | 1.00mm                                                            |
| Packaging Type                 | Tray                                                              |
| Pitch - Mating Interface       | 1.90mm                                                            |
| Pitch - Termination Interface  | 1.90mm                                                            |
| Plating min - Mating           | 0.762µm                                                           |
| Polarized to PCB               | Yes                                                               |
| Stackable                      | No                                                                |
| Temperature Range - Operating  | -55° to +85°C                                                     |
| Termination Interface: Style   | Through Hole - Compliant Pin                                      |

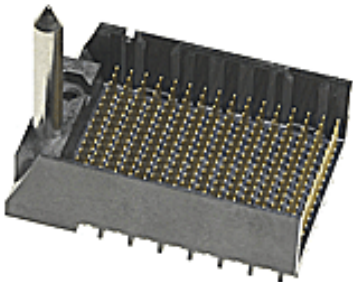

Series image - Reference only

|                                                                                                                                                                                                                                               |                                                                                                   |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------|
| <b>EU ELV</b><br><b>Not Relevant</b>                                                                                                                                                                                                          |                                                                                                   |
| <b>EU RoHS</b><br><b>Compliant</b><br><b>REACH SVHC</b><br>Not Contained Per -<br>ED/61/2018 (27 June<br>2018)<br><b>Halogen-Free</b><br><b>Status</b><br><b>Low-Halogen</b><br>For more information, please visit <a href="#">Contact US</a> | <b>China RoHS</b><br><br><br><br><br><br><br><br><br><br><br>China ROHS<br>ELV<br>RoHS Phthalates |
| Green Image<br>Not Relevant<br>Not Contained                                                                                                                                                                                                  |                                                                                                   |

**Search Parts in this Series**  
[76055](#) Series

**Mates With**  
[76060](#) Impact 100 Ohm Daughtercard

**Electrical**

|                               |                 |
|-------------------------------|-----------------|
| Current - Maximum per Contact | 0.75A           |
| Data Rate                     | 25.0 Gbps       |
| Impedance                     | 100Ω            |
| Shield Type                   | N/A             |
| Shielded                      | No              |
| Voltage - Maximum             | 30V AC (RMS)/DC |

**Solder Process Data**

|                             |     |
|-----------------------------|-----|
| Lead-freeProcess Capability | N/A |
|-----------------------------|-----|

**Material Info**

**Reference - Drawing Numbers**

|                           |                                     |
|---------------------------|-------------------------------------|
| Application Specification | AS-76060-990-001, AS-76060-9999-001 |
| Packaging Specification   | PK-70873-759                        |
| Product Specification     | PS-76060-999-001                    |
| Sales Drawing             | SD-76055-002-001                    |
| Symbol/Footprint Data     | SYM-76055-3614                      |

This document was generated on 10/08/2018

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Molex:](#)

[76055-3614](#)