
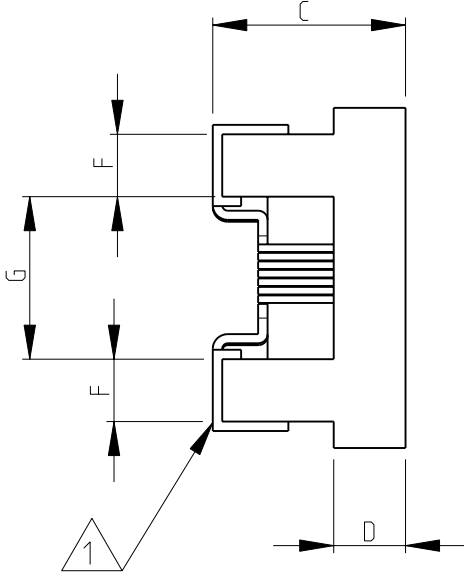


LOC		DIST		REVISIONS					
E		B		P	LTR	DESCRIPTION	DATE	DWN	APVD
					BA1	REVISED PER ECO-11-005150	29MAR2011	RK	HMR


SERIES 36501J, 36501E AS SHOWN

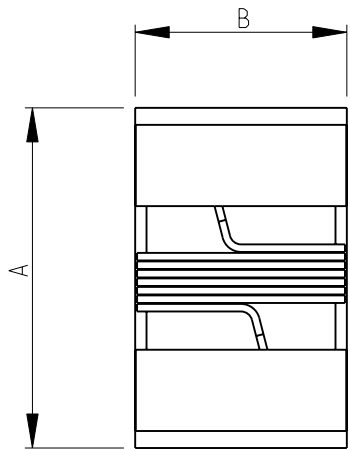


- 1 TERMINAL WRAPAROUND: 0.007"(0.18mm) APPROX. ON BOTH ENDS
- 2 AVAILABLE IN 2 DIFFERENT SERIES
- 3 FOR FURTHER INFORMATION SEE DATA SHEET FOR 3650 SERIES-LOW INDUCTANCE,HIGH FREQUENCY CHIP INDUCTOR

RoHS Compliant

RECOMMENDED LAND PATTERN FOR 36501J, 36501E SERIES

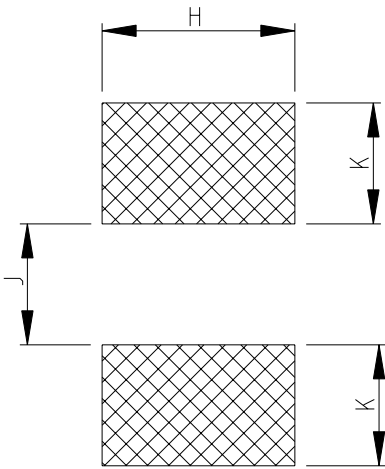

36501E SERIES					36501J SERIES				
36501E	1.27	0.76	0.61	0.15	0.23	0.56	0.66	0.50	0.46
36501J	1.80	1.12	1.02	0.38	0.33	0.86	1.02	0.64	0.64
SERIES	A MAX.	B MAX.	C MAX.	D REF.	F	G	H	K	J

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	SUBHASH.M		14-NOV-08		TE Connectivity										
DIMENSIONS:		CHK	PRAKASH.S		14-NOV-08		NAME LOW INDUCTANCE, HIGH FREQUENCY CHIP INDUCTOR SERIES 3650										
mm		APVD	STEPHEN.P		14-NOV-08												
		PRODUCT SPEC		-													
		APPLICATION SPEC		-													
MATERIAL		FINISH		WEIGHT		SIZE		CAGE CODE		DRAWING NO		RESTRICTED TO					
-		-		-		A3		00779		C= 1624112		-					
CUSTOMER DRAWING						SCALE		20:1		SHEET		1 OF 1		REV		BA1	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[36501J82NGTDG](#)