

C&K 3 Series Thumbwheel Switches



Features/Benefits

- Most complete product offering in the industry
- Spacers available to fit most panel cutouts
- Front or rear mounting options
- Illuminated models available

Typical Applications

- Test & measurement equipment
- Industrial equipment
- Computer devices

Specifications

CONTACT RATING:

CARRY: 1 AMP continuous.
SWITCH: 100 mA max.

OPERATING VOLTAGE: 50 mV to 28 V DC or 120 V AC.

ELECTRICAL LIFE: 100,000 actuations.

CONTACT RESISTANCE: Below 100 m Ω typ. initial @
2-4 V DC, 100 mA.

INSULATION RESISTANCE: 10⁹ Ω min.

DIELECTRIC STRENGTH: 500 Vrms min. @ sea level
between common terminal and any output.

OPERATING TEMPERATURE: -10°C to 65°C.

Materials

HOUSING: ABS plastic.

THUMBWHEEL: ABS plastic.


ROTOR CONTACTS: Precious metal on copper alloy.

STATOR CONTACTS: Hard gold over nickel over copper
on epoxy fiberglass.

NOTE: Specifications and materials listed above are for switches with standard options. For information on specific and custom switches, consult Customer Service Center.

Build-A-Switch

To order, simply select desired option from each category and place in the appropriate box. Available options are shown and described on pages M-9 thru M-12. For additional options not shown in catalog, consult Customer Service Center. Consult factory for illumination availability.

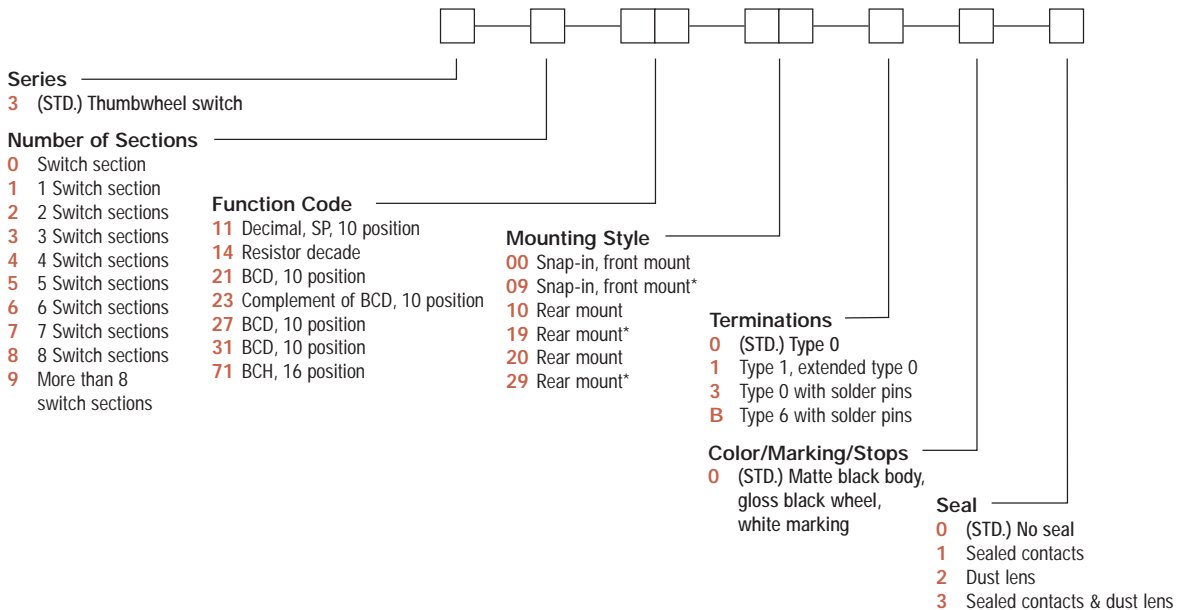


Thumbwheel & Pushwheel



M

SERIES

3 (STD.) THUMBWHEEL SWITCHES

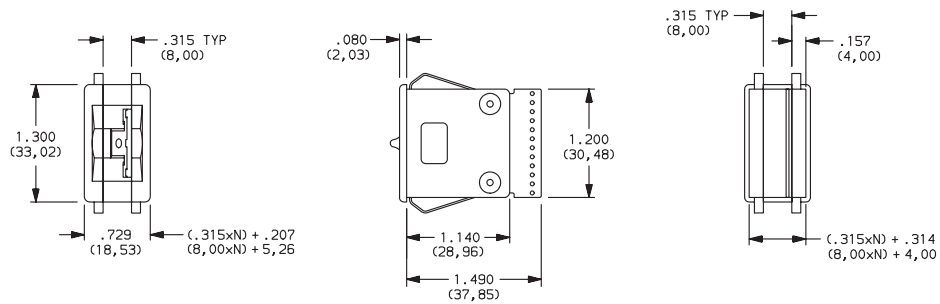

NUMBER OF SECTIONS

- 0 Switch section only, no assembly. Blank bodies are considered sections; endplates are not sections. Must be ordered with 09 or 19 mounting style options, see pages M-10 and M-11.
- 1-8 Number of switch sections in assembly, includes endplates.
- 9 More than 8 switch sections, specify on CONFIGURATION FORM, page M-15 and consult Customer Service Center.


NOTE: Endplates and blank sections available separately, see pages M-13 and M-14.

FUNCTION CODE

- 11 DECIMAL-1 POLE; 10 POSITION
- 14 RESISTOR DECADE; 1-2-2-2-2 CODE (RESISTORS NOT SUPPLIED)
- 21 BCD 1-2-4-8; 10 POSITION

W H E E L	SIGNALS CONNECTED TO COMMON SIGNAL C										
	0	1	2	3	4	5	6	7	8	9	C
0	●										●
1		●									●
2			●								●
3				●							●
4					●						●
5						●					●
6							●				●
7								●			●
8									●		●
9										●	●
	2	3	4	5	6	7	8	9	10	11	12
	TERM. LOCATION										

Available Terminations: 0, 1, 3
See fig. 1, page M-12.



Available Terminations: 1
See fig. 1, page M-12.

W H E E L	SIGNALS CONN. TO COMMON SIGNAL C				
	1	2	4	8	C
0					●
1	●				●
2		●			●
3			●		●
4				●	●
5					●
6					●
7					●
8					●
9					●
	3	5	7	11	9
	TERM. LOCATION				

Available Terminations: 0, 1, 3
See fig. 1, page M-12.

NOTE: For terminal location diagram, see page M-12.



Dimensions are shown: IN (mm)
Dimensions subject to change



C&K 3 Series Thumbwheel Switches

FUNCTION CODE

23 COMPLEMENT OF BCD 1-2-4-8;
10 POSITION

W H F mm	SIGNALS CONN. TO			
	1	2	4	8
0	●	●	●	●
1	●	●	●	●
2	●	●	●	●
3	●	●	●	●
4	●	●	●	●
5	●	●	●	●
6	●	●	●	●
7	●	●	●	●
8	●	●	●	●
9	●	●	●	●
	3	9	11	5
	TERM. LOCATION			

Available Terminations: 0, 1, 3
See fig. 1, page M-12.

27 BCD 1-2-4-8; 10 POSITION

W H F mm	SIGNALS CONN. TO			
	1	2	4	8
0				
1				
2	●			
3	●			
4				
5	●			
6	●			
7	●			
8				
9	●			
	4	5	1	2
	TERM. LOCATION			

Available Terminations: B
See fig. 2, page M-12.

31 BCD 1-2-4-8; 10 POSITION

W H F mm	SIGNALS CONN. TO			
	1	2	4	8
0				
1	●			
2	●			
3	●			
4				
5	●			
6	●			
7	●			
8				
9	●			
	2	3	11	9
	TERM. LOCATION			

Available Terminations: 0, 1, 3
See fig. 1, page M-12.

71 BINARY CODED HEXADECIMAL,
16 POSITION

W H F mm	SIGNALS CONN. TO			
	1	2	4	8
0				
1	●			
2	●			
3	●			
4				
5	●			
6	●			
7	●			
8				
9	●			
A	●			
B	●			
C	●			
D	●			
E	●			
F	●			
	3	5	7	11
	TERM. LOCATION			

Available Terminations: 0, 1, 3
See fig. 1, page M-12.

NOTE: For terminal location diagram, see page M-12.

MOUNTING STYLE


Type 0 Snap-In Front Mount

MOUNTING STYLE	DIM. 'A'
00	$(.315 \times N) + .326$ $(8,00 \times N) + (8,28)$




N = Number of sections.

Recommended panel thickness:
0.46-.125
(1,16-3,18)

PANEL MOUNTING



00 SWITCH ASSEMBLY W/ ENDPLATES--.315 (8,00) SECTION PITCH



N = Number of sections.

09 SWITCH SECTION ONLY--UNASSEMBLED WITHOUT ENDPLATES OR SPACERS
(Must be ordered with number of sections option "0", see Page M-9.)

NOTE: Endplates, blank sections, spacers
and assembly hardware available separately, see pages M-13 and M-14.



Third Angle
Projection
Dimensions are shown: IN (mm)
Dimensions subject to change



MOUNTING STYLE


Type 1 Rear Mount

MOUNTING STYLE	DIM. 'A'	DIM. 'B'
10	$(.350 \times N) + .340$ (8,89 x N) + (8,64)	$(.350 \times N) + .560$ (8,89 x N) + (14,22)




N = Number of sections.

Recommended panel thickness:
0.46-.125
(1,16-3,18)

PANEL MOUNTING



10 SWITCH ASSEMBLY W/ ENDPLATES--.350 (8,89) SECTION PITCH



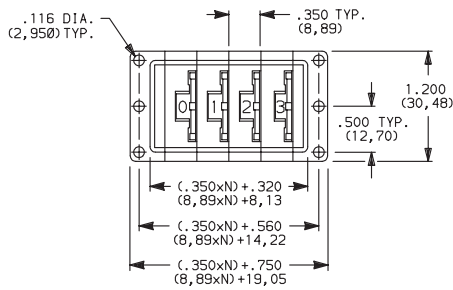


N = Number of sections.

19 SWITCH SECTION ONLY--UNASSEMBLED WITHOUT ENDPLATES OR SPACERS (Must be ordered with number of sections option '0', see Page M-9.)

Type 2 Rear Mount

20 SWITCH ASSEMBLY W/ ENDPLATES--.350 (8,89) SECTION PITCH

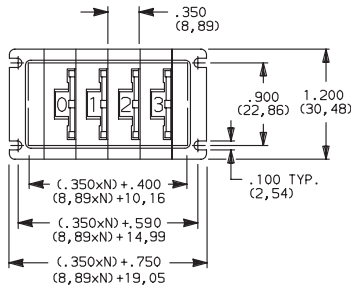

N = Number of sections.

29 SWITCH SECTION ONLY--UNASSEMBLED WITHOUT ENDPLATES OR SPACERS (Must be ordered with number of sections option '0', see Page M-9.)

Type 3 Snap1-in Front Mount

09 SWITCH SECTION ONLY--UNASSEMBLED WITHOUT ENDPLATES OR SPACERS (Must be ordered with number of sections option '0', see Page M-9.)

NOTE: Endplates, blank sections, spacers and assembly hardware available separately, see pages M-13 and M-14.




Dimensions are shown: IN (mm)
Dimensions subject to change


C&K 3 Series Thumbwheel Switches

TERMINATIONS

0 (STD.) TYPE 0




1 TYPE 1, EXTENDED TYPE 0



Signal traces cut except for common(s).


3 TYPE 0 WITH SOLDER PINS

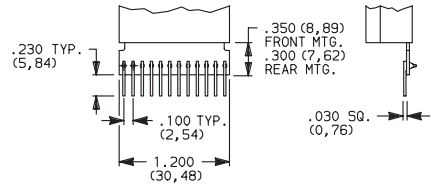

9 ANY COMBINATION OF TERMINATION CONFIGURATIONS OR SPECIAL TERMINATIONS.

Specify on configuration form, page M-15 and consult Customer Service Center.

B TYPE 6 WITH SOLDER PINS

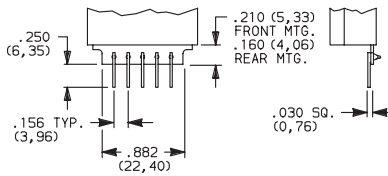

PC Board 1/32" (0,79) thick.

NOTE: All terminal holes shown may not be present for all function codes, consult Customer Service Center. Terminal connector available for termination options 0 & 1, see page M-14.

Terminal Location Numbers




FIG. 1




FIG. 2



NOTE: See function codes, pages M-9 and M-10, for signal locations.

COLOR/MARKING/STOPS

0 (STD.) MATTE BLACK HOUSING (Gloss black wheel with white characters; no stops.)

NOTE: Stop pins are available separately, see page M-14.


SEAL

0 (STD.) UNSEALED SWITCHING CONTACTS.

1 SEALED SWITCHING CONTACTS. (Sealing is by means of an o-ring rotary seal and a cured-in-place elastomer gasket. Switching contact area is protected from moisture, oil, and airborne contaminants.)

2 DUST LENS. (Protects the character face of the wheel from abrasion and dirt.)

3 SEALED SWITCHING CONTACTS AND DUST LENS



Dust Lens



Third Angle
Projection

Dimensions are shown: IN (mm)
Dimensions subject to change



C&K 3 Series Thumbwheel Switches

AVAILABLE HARDWARE

Blank sections, Type 0 & 3,
.315 THK.



PART NO.

413602000 W/RIB-BLACK
413609000 W/RIB-GRAY

400502000 W/RIB & W/OUT SPRINGS-BLACK
400509000 W/RIB & W/OUT SPRINGS-GRAY

Blank sections, Front mount, Type 0 & 3,
.315 THK.




PART NO.

413502000 PLAIN-BLACK
413509000 PLAIN-GRAY

400702000 PLAIN & W/OUT SPRINGS-BLACK
400709000 PLAIN & W/OUT SPRINGS-GRAY

Blank sections, Rear mount, Type 1,
.350 THK.



4006


4008

PART NO.

400602000 W/RIB-BLACK
400609000 W/RIB-GRAY

400802000 PLAIN-BLACK
400809000 PLAIN-GRAY

Blank sections, Rear mount, Type 2,
.350 THK.

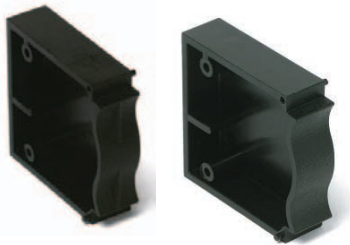

4734

4733

PART NO.

473402000 W/RIB-BLACK
473409000 W/RIB-GRAY

473302000 PLAIN-BLACK
473309000 PLAIN-GRAY

End plates, Front mount, Type 0



PART NO.

413402000 BLACK
413409000 GRAY

Two required for
complete assembly.

End plates, Rear mount, Type 1



PART NO.

400402000 BLACK
400409000 GRAY

Two required for
complete assembly.

End plates, Rear mount, Type 2



PART NO.

473202000 BLACK
473209000 GRAY

Two required for
complete assembly.

Spacers, Front mount, Type 0 & 3, .078 THK.
(Makes section pitch 10mm)



PART NO.

410802000 BLACK
410809000 GRAY

Stop pins



PART NO.

402900000

Thumbwheel & Pushwheel



M

C&K 3 Series Thumbwheel Switches

AVAILABLE HARDWARE

Terminal connector



605A00000



605A02000

PART NO.

605A00000 PC

605A02000 SOLDER LUG

Fits 0 & 1 terminations only.

Screws for field assembly of thumbwheel switches
(2 screws needed per assembly + 403500000 nuts)

SCREW PART NUMBER (0-80 UNF THD. SIZE)	NUMBER OF SECTIONS IN ASSEMBLY	
	FRONT MOUNTING	REAR MOUNTING
	MTG. STYLE - 00	MTG. STYLE - 10
412700000	1-2	1-2
412701000	3-4	3
412702000	5-7	4-6
412703000	8-10	7-9
412704000	11-13	10-12
412705000	14-16	13-15

Nut



Two nuts required per assembly and screws.

Nut driver (For 403500000 nut)



PART NO.

403500000

PART NO.

406100652

Thumbwheel & Pushwheel



M

Configuration Form

GRAY SHADED AREAS TO BE FILLED IN BY CUSTOMER SERVICE.

CATALOG PART NO.

3

C&K PART NUMBER

C&K PART NUMBER

COMPANY NAME _____












CUSTOMER
PRINT
REVISION:

ADDRESS _____ TEL.# _____

CUSTOMER CONTACT _____ DATE _____

DETAILS:

ORIGINATED BY _____ SALES REP. _____

THUMBWHEEL SECTIONS	NO. OF SEC.	FUNCTION CODE – TERMINATIONS – COLOR/MARKING/STOPS/SEAL – ILLUMINATION <small>ENTER OPTION CODES IN APPROPRIATE BOXES. FUNCTION CODES INCLUDE BLANK SECTIONS (SEE PAGES M-9 & M-10).</small>	DESCRIBE IN APPROPRIATE ROW
	1	3 - <input type="text"/> <input type="text"/> - - <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/>	
	2	3 - <input type="text"/> <input type="text"/> - - <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/>	
	3	3 - <input type="text"/> <input type="text"/> - - <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/>	
	4	3 - <input type="text"/> <input type="text"/> - - <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/>	
	5	3 - <input type="text"/> <input type="text"/> - - <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/>	
	6	3 - <input type="text"/> <input type="text"/> - - <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/>	
	7	3 - <input type="text"/> <input type="text"/> - - <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/>	
	8	3 - <input type="text"/> <input type="text"/> - - <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/>	
	9	3 - <input type="text"/> <input type="text"/> - - <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/>	
	10	3 - <input type="text"/> <input type="text"/> - - <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/>	
	11	3 - <input type="text"/> <input type="text"/> - - <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/>	

QUALITY CONTROL INSTRUCTIONS

PRODUCTION APPROVAL

DATE

Q.C. APPROVAL

DATE

REV.

INITIALS

DATE

FOR SWITCHES WITH MORE THAN 11 SECTIONS, CONTINUE ON ADDITIONAL SHEETS.

SPECIAL INSTRUCTIONS OR SPECIFICATIONS:

SHEET ____ OF ____



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

C&K Switches:

[406100652](#) [412707000](#) [321110300](#) [412703000](#) [400402000](#) [342210000](#)