


Material	High Conductivity Seamless Copper Tube
Plating	Electro-Tin
Wire Size	2/0 STR/FLEX
Wire Type	Stranded Copper: Class B & C Compact, Class G, H, I, K, M, Locomotive
Wire Strip Length	1-9/16 in.
Stud Size	1/2 in.
UL Listed Wire Connector	Yes, for applications up to 35kv. Consult cable manufacturer for voltage stress relief instructions with applications greater than 2000 volts.
UL Temperature Rating	90° C
C.S.A Certified Wire Connector	Yes
Panduit Color Code on Barrel	BLACK
Panduit Die Index No. on Barrel	P45
Alternate Industry Die Index No. () on Barrel	(13)



Technical drawing of a Panduit 2/0 STR/FLEX LC BX2/0-12F cable connector. The drawing shows a side view of the connector with dimensions and labels. The main body is rectangular with a circular port on the left. The port is labeled "2/0 STR/FLEX LC BX2/0-12F". The main body is labeled "PANDUIT". The connector has a "Wire inspection window" on the right. Dimensions are given as .96±.04 for the height, .50±.04 for the width, and .53±.02 DIA for the port diameter.

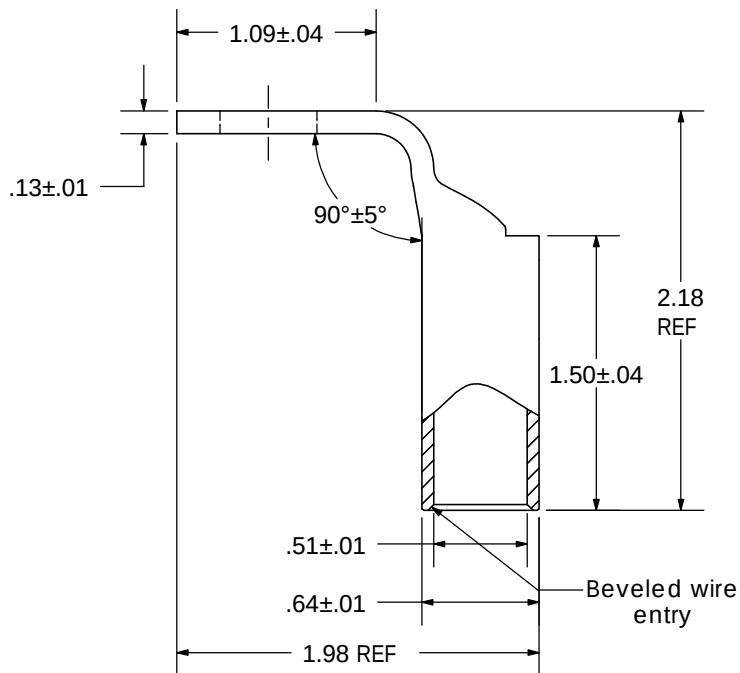

LCBX2/0-12F-X Copper Lug - One-Hole, Long Flex Barrel, 90° Angle Tongue	
SCALE N/A	DRAWING NO / CAD FILE LCBX2 0-12F-CUST

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Panduit:

[LCBX2/0-12F-X](#)