

## Features

- Low Noise Figure
- High  $IP_3$
- Single Supply +3 V, +5 V<sup>6</sup>
- RoHS\* Compliant SC70- 6LD Package

## Description

M/A-COM Technology's MAAL-009120 broadband gain stage is a GaAs MMIC amplifier in a lead-free SC70-6LD (SOT-363) surface mount plastic package. The MAAL-009120 employs a monolithic 1-stage self-biased design featuring a convenient 50  $\Omega$  input/output impedance that minimizes the number of external components required. Its broadband design provides usable performance from 500 to 3000 MHz.

For operation below 500 MHz contact M/A-COM Tech's application group for support.


## Ordering Information<sup>1,2</sup>

Part Number	Package
MAAL-009120 -TR1000	1000 piece reel
MAAL-009120 -TR3000	3000 piece reel
MAAL-009120 -001SMB	Sample Test Board

1. Reference Application Note M513 for reel size information.

2. All sample boards include 5 loose parts.

## Functional Block Diagram

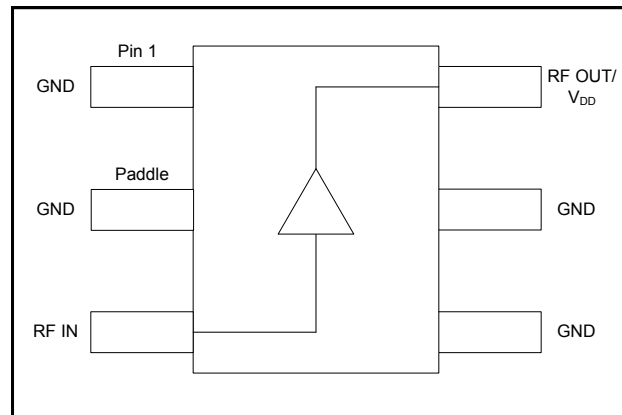

## Pin Configuration

PIN	Function	Description
1	GND	Ground
2	GND	Ground
3	RF In	RF input
4	GND	Ground
5	GND	Ground
6	RF Out/V <sub>DD</sub>	RF output & drain voltage input

## Absolute Maximum Ratings<sup>3,4,5</sup>

Parameter	Absolute Maximum
Gain Compression	6 dB
Voltage	5.5 volts
Operating Temperature	-40 °C to +85 °C
Storage Temperature	-65 °C to +150 °C

3. Exceeding any one or combination of these limits may cause permanent damage to this device.

4. M/A-COM Technology does not recommend sustained operation near these survivability limits.

5. Operating at 5 volts with no drain resistor will require the RF output power to be no greater than 10 dBm.

\* Restrictions on Hazardous Substances, European Union Directive 2002/95/EC.


## Miniature Broadband Gain Stage 70 - 3000 MHz

Rev. V1

Electrical Specifications: Freq. = 500 - 3000 MHz,  $T_A = 25^\circ\text{C}$ ,  $Z_0 = 50 \Omega$

Parameter	Test Conditions	Units	Bias Voltage			
			3 Volts			5 Volts <sup>5</sup>
			Min.	Typ.	Max.	Typ.
Gain	F = 0.9 GHz	dB	—	14	—	14.5
	F = 1.9 GHz		10.4	11	13.0	11.2
	F = 3.0 GHz		—	8	—	8.5
Noise Figure	F = 0.9 GHz	dB	—	1.4	—	1.5
	F = 1.9 GHz		—	1.4	1.8	1.5
	F = 3.0 GHz		—	1.5	—	1.6
Input Return Loss	F = 0.9 GHz	dB	—	7	—	7
	F = 1.9 GHz		—	11	—	11.0
	F = 3.0 GHz		—	11	—	10.5
Output Return Loss	F = 0.9 GHz	dB	—	22	—	26
	F = 1.9 GHz		—	20	—	18.5
	F = 3.0 GHz		—	15.5	—	17
Output P1dB	500 – 3000 MHz	dBm	—	18.5	—	—
Output IP <sub>3</sub>	500 – 3000 MHz	dBm	—	35	—	35
Current	—	mA	60	80	100	95


### Baseline Application Schematic @ 3V, 5V

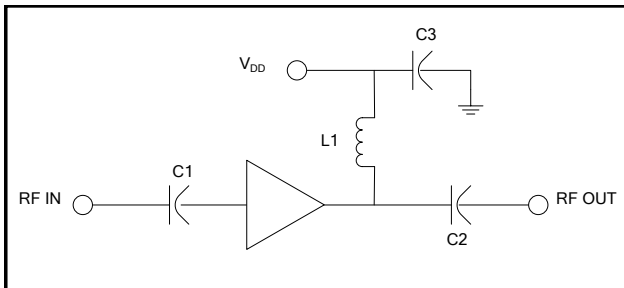

### Component List @ 3V, 5V

Part	Value	Case Style	Purpose
C1	39 pF	0402	Input DC Block
C2	39 pF	0402	Output DC Block
C3	470 pF	0402	RF Bypass
L1	12 nH	0805	RF Choke/Tuning

### Recommended PCB Configuration @ 3V, 5V

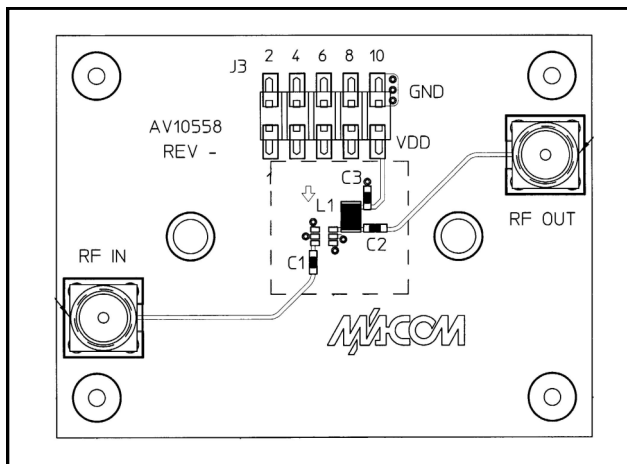

### Handling Procedures

The following precautions should be observed to avoid damage:

### Static Sensitivity


Gallium Arsenide Integrated Circuits are sensitive to electrostatic discharge (ESD) and can be damaged by static electricity. Proper ESD control techniques should be used when handling these devices.

## Miniature Broadband Gain Stage 70 - 3000 MHz


Rev. V1

Typical Performance Curves:  $V_{DD} = 3\text{ V}$


**Gain**

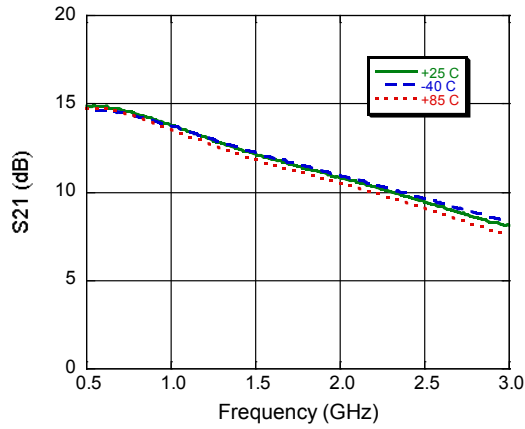


**Input Return Loss**

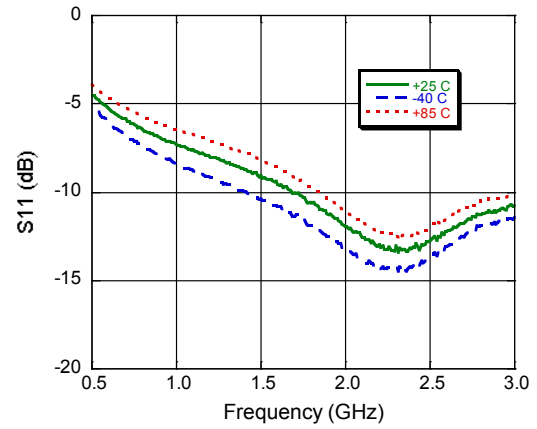

**Output Return Loss**

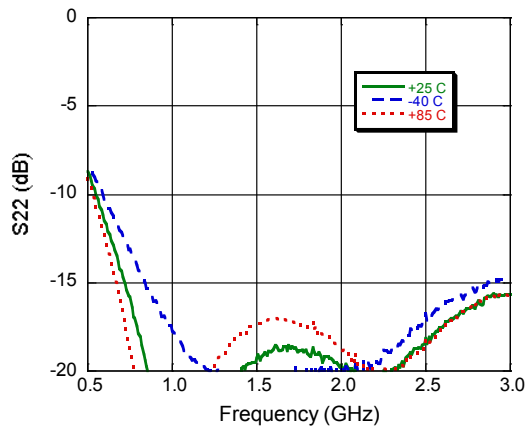

**Noise Figure**

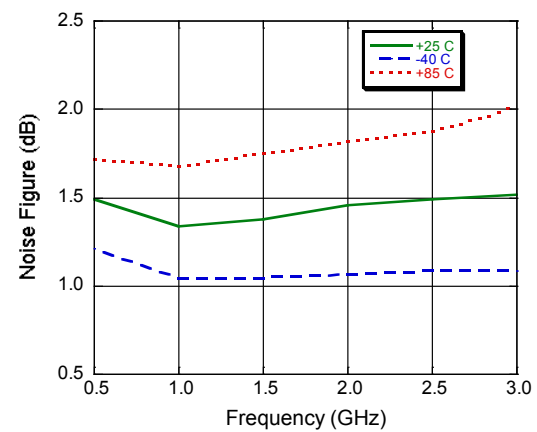


## Miniature Broadband Gain Stage 70 - 3000 MHz


Rev. V1

### Typical Performance Curves: $V_{DD} = 3\text{ V}$


Output IP3, Input Power @ -12 dBm

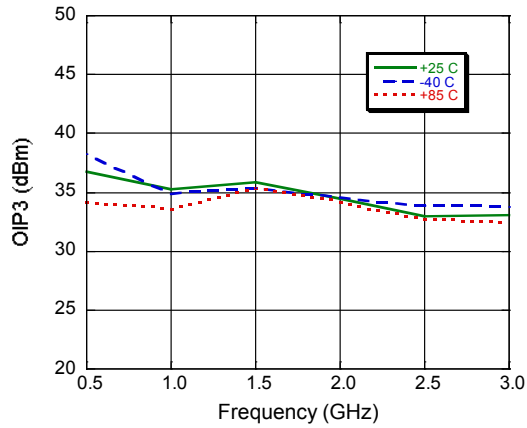

P1dB

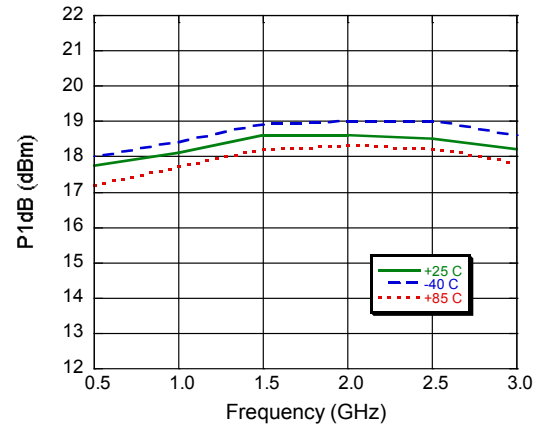

Current

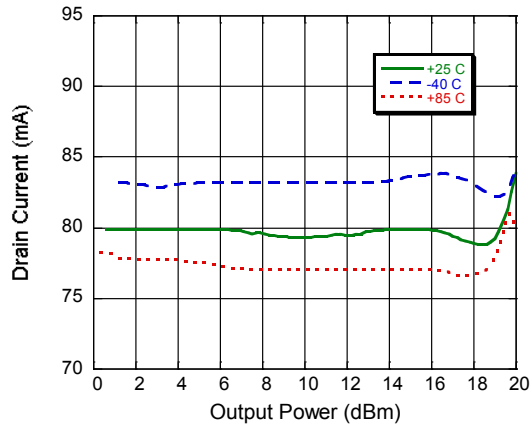


## Miniature Broadband Gain Stage 70 - 3000 MHz


Rev. V1

Typical Performance Curves:  $V_{DD} = 5 V^6$


**Gain**

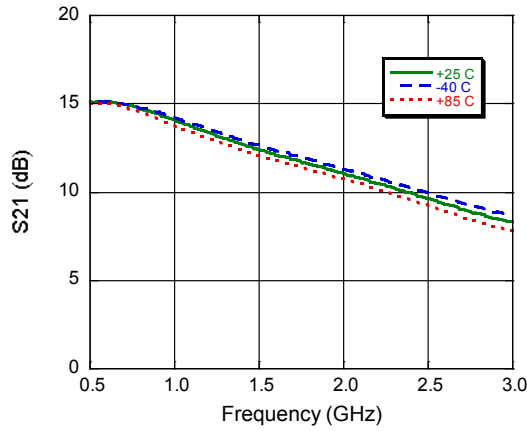


**Input Return Loss**

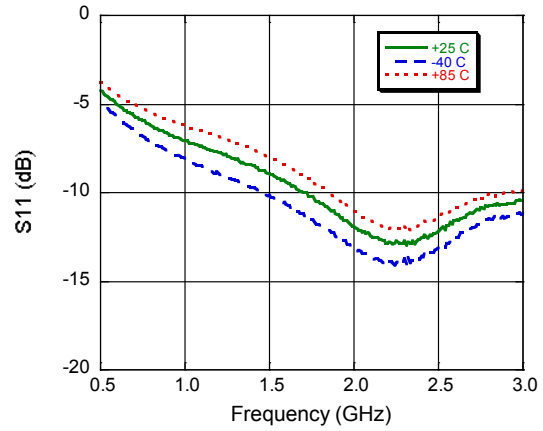


**Output Return Loss**

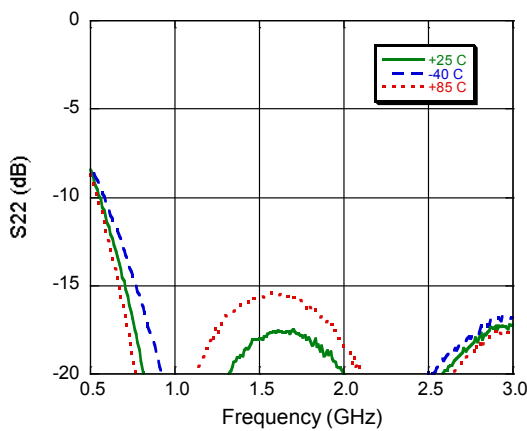


**Noise Figure**

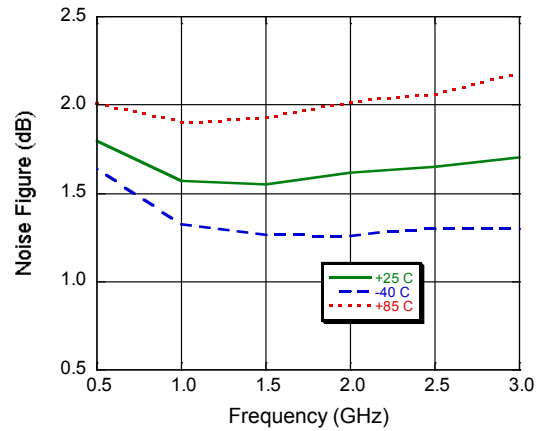

**Output IP3, Input Power = -12 dBm**

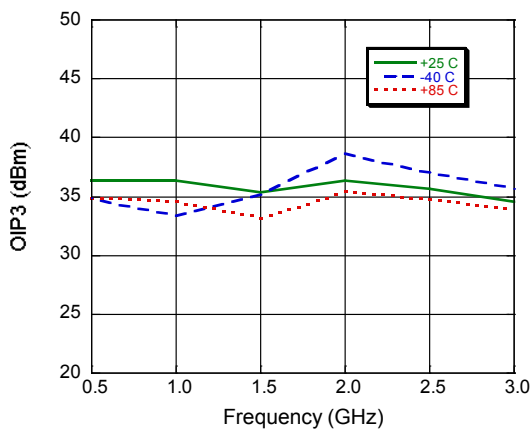

**Current**

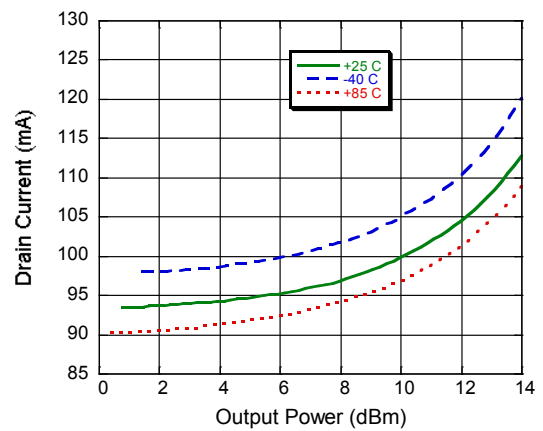


6. This device can run from a single 5 volt supply, but for 1M hour MTTF the output power must be no greater than 10 dBm unless using a series resistor on the drain. See Application note 7 on page 7.

## Miniature Broadband Gain Stage 70 - 3000 MHz

Rev. V1


### Lead-Free SC70-6LD (SOT-363)<sup>†</sup>

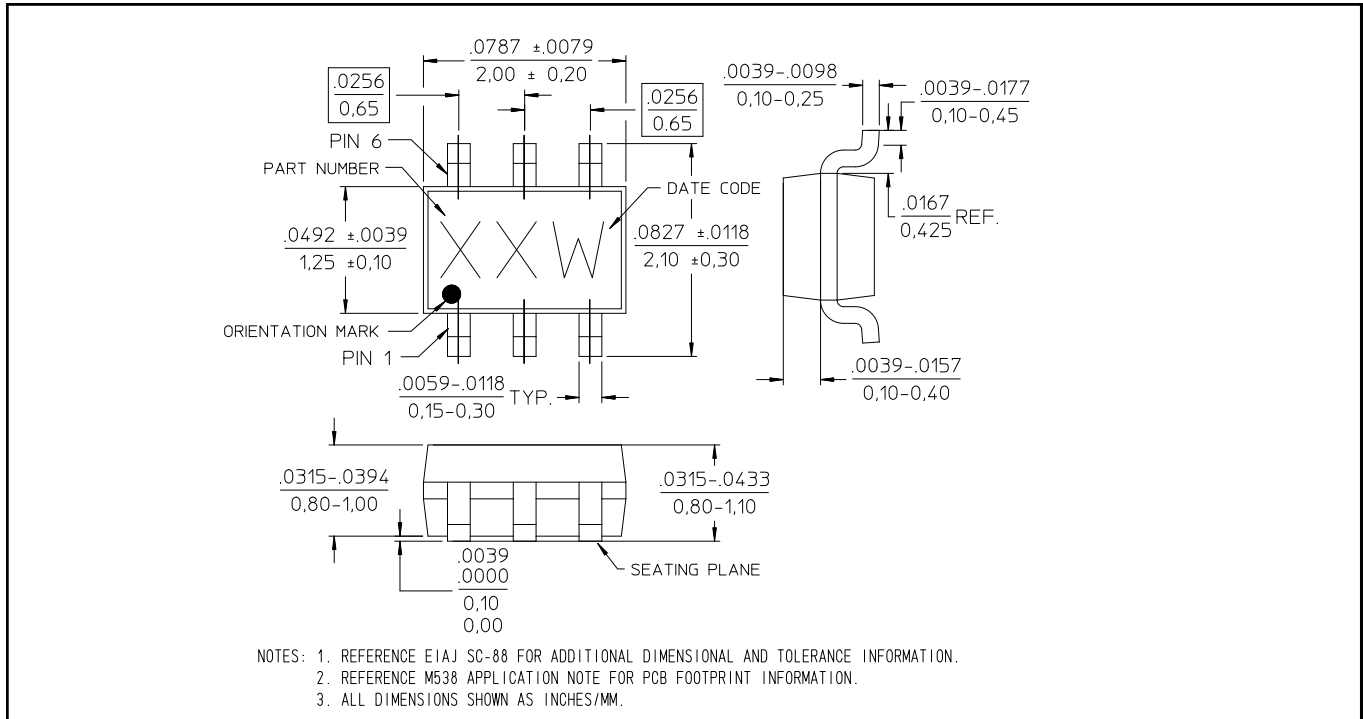

<sup>†</sup> Reference Application Note M538 for lead-free solder reflow recommendations.  
Meets JEDEC moisture sensitivity level 1 requirements.  
Plating is 100% matte tin over copper.

## 5 Volt Application Section for operation above 10 dBm output power

### Application Layout Schematic @ 5V <sup>6</sup>

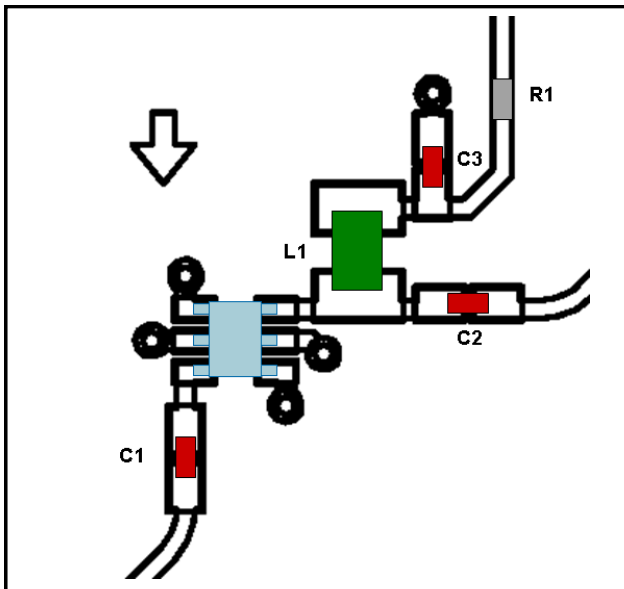


6. The addition of a 24.9  $\Omega$  series resistor on the drain line allows for 5 volt operation above 10 dBm output power, but no greater than 22 dBm of output power.

### Component List @ 5V

Part	Value	Case Style	Purpose
C1	39 pF	0402	Input DC Block
C2	39 pF	0402	Output DC Block
C3	470 pF	0402	RF Bypass
L1	12 nH	0805	RF Choke/Tuning
R1	24.9 $\Omega$	0402	Voltage Drop


### Application Schematic @ 5V

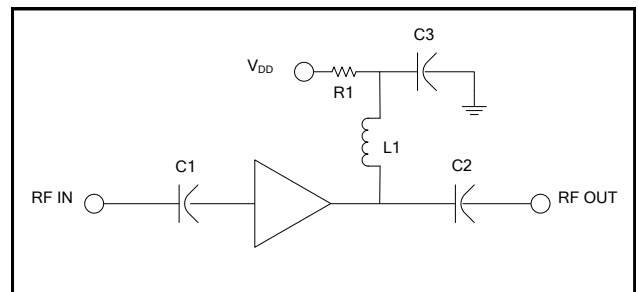


**5 Volt Application Section for operation above 10 dBm output power**

**Typical Performance Curves:  $V_{DD} = 5\text{ V}$**


**Gain**

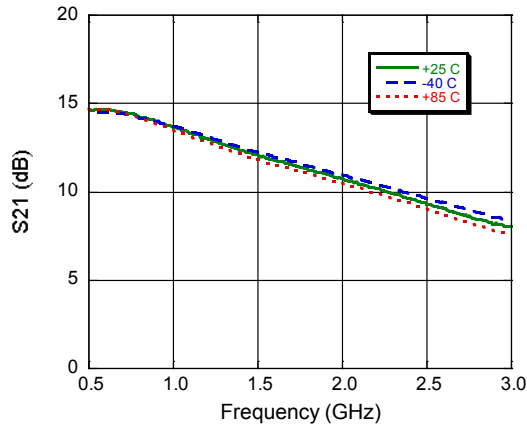


**Input Return Loss**

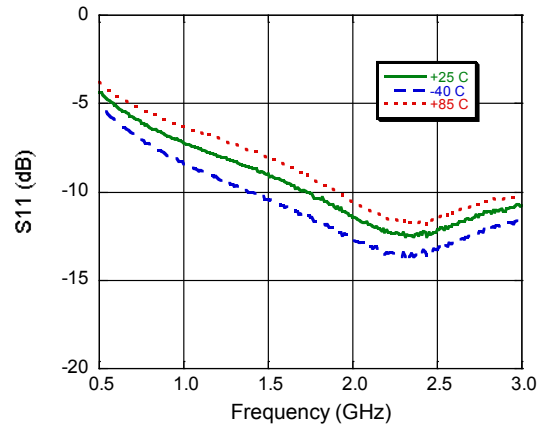

**Output Return Loss**

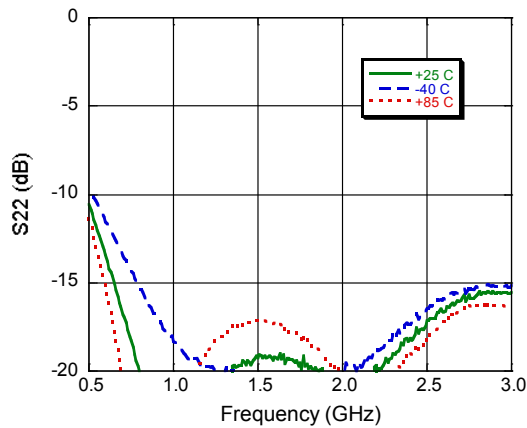

**Noise Figure**

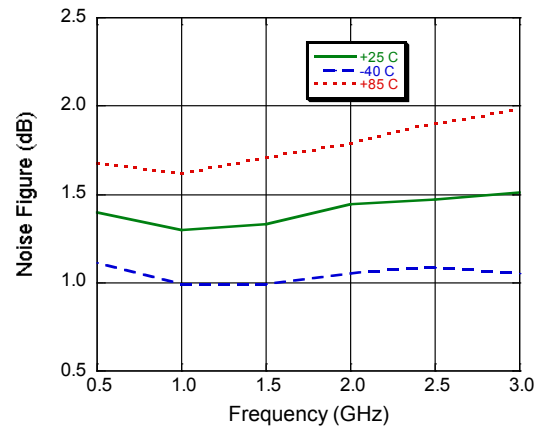





**5 Volt Application Section for operation above 10 dBm output power**

**Typical Performance Curves:  $V_{DD} = 5 V$**


**Output IP3, Input Power @ -12 dBm**

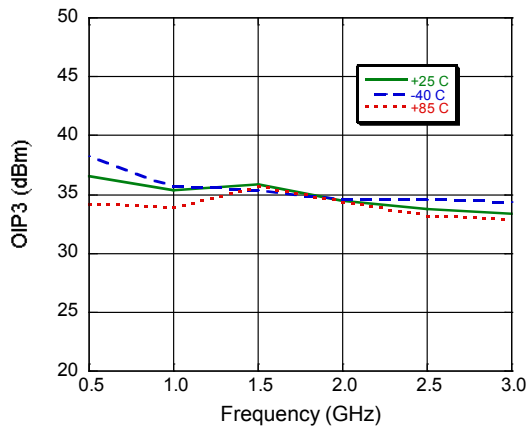

**P1dB**

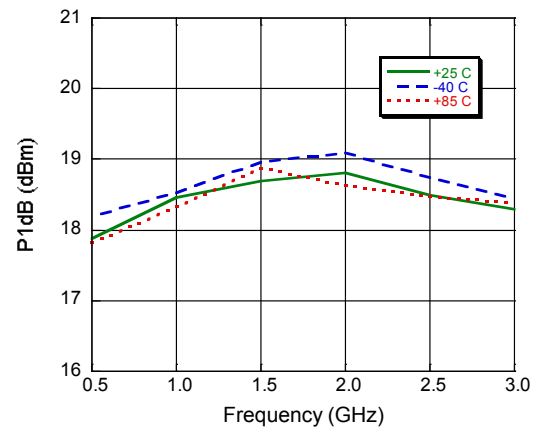


**Current**

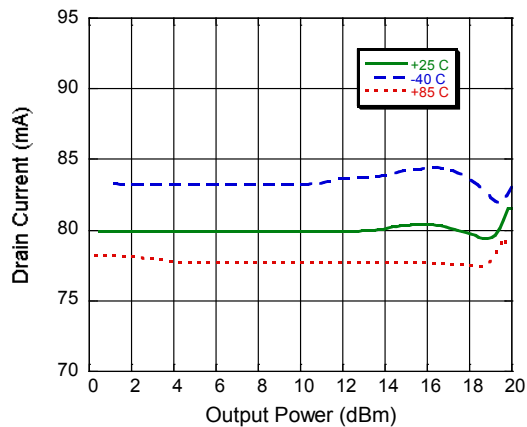


## 3 Volt Application Section @ 70 MHz

### Application Layout Schematic @ 3V

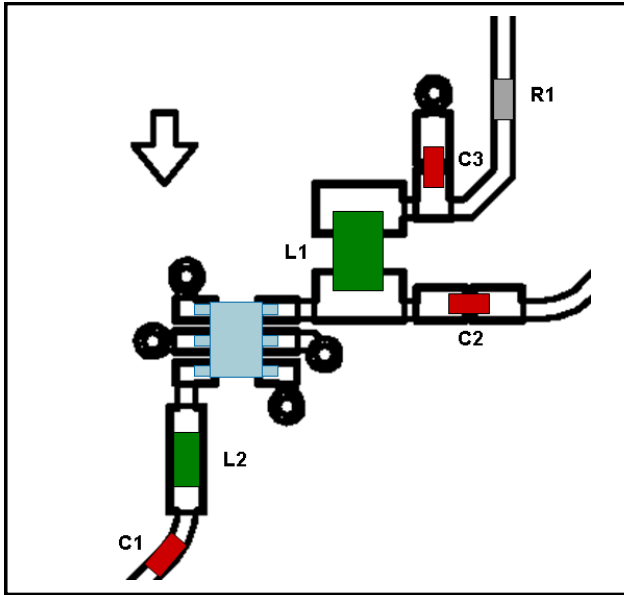


### Typical Performance Curves: $V_{DD} = 3\text{ V}$


#### S-Parameter Response @ 3 Volts

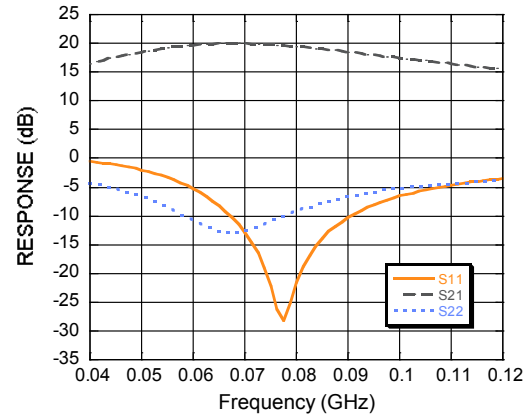

#### Noise Figure

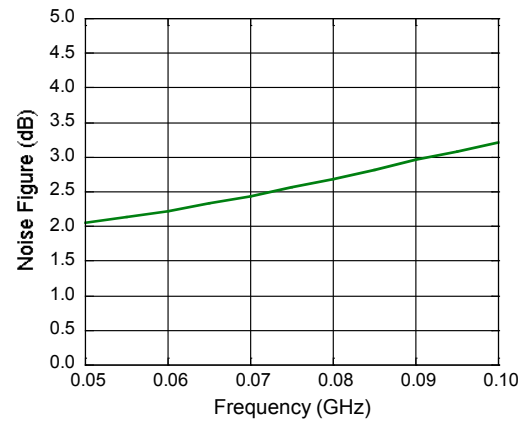

#### P1dB

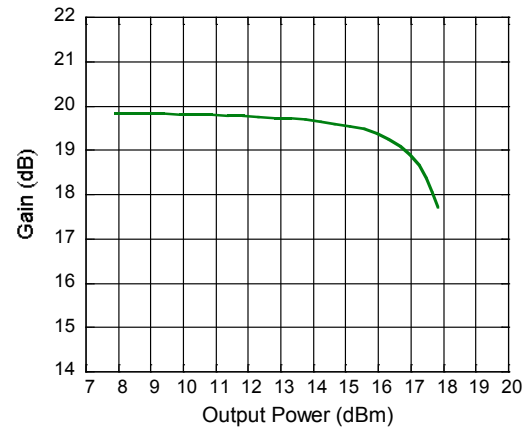

### Component List @ 3V

Part	Value	Case Style
C1 - C3	0.1 $\mu\text{F}$	0402
L1	80 nH	0805
L2	220 nH	0603
R1	3 $\Omega$	0402

M/A-COM Technology Solutions Inc. All rights reserved.

Information in this document is provided in connection with M/A-COM Technology Solutions Inc ("MACOM") products. These materials are provided by MACOM as a service to its customers and may be used for informational purposes only. Except as provided in MACOM's Terms and Conditions of Sale for such products or in any separate agreement related to this document, MACOM assumes no liability whatsoever. MACOM assumes no responsibility for errors or omissions in these materials. MACOM may make changes to specifications and product descriptions at any time, without notice. MACOM makes no commitment to update the information and shall have no responsibility whatsoever for conflicts or incompatibilities arising from future changes to its specifications and product descriptions. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document.

THESE MATERIALS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, RELATING TO SALE AND/OR USE OF MACOM PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, CONSEQUENTIAL OR INCIDENTAL DAMAGES, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT. MACOM FURTHER DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. MACOM SHALL NOT BE LIABLE FOR ANY SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS, WHICH MAY RESULT FROM THE USE OF THESE MATERIALS.

MACOM products are not intended for use in medical, lifesaving or life sustaining applications. MACOM customers using or selling MACOM products for use in such applications do so at their own risk and agree to fully indemnify MACOM for any damages resulting from such improper use or sale.