

SPECIFICATION CONTROL DRAWING

55PC2132

TITLE

THREE CONDUCTOR CABLE, FLAT BRAID SHIELDED, JACKETED, 600 VOLT

Date

6-22-95

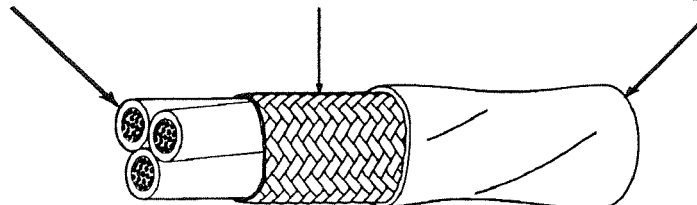
Revision

D

This specification sheet forms a part of the latest issue of Raychem Specification 55PC.

COMPONENT WIRES - 55PC0112

SHIELD - SILVER-COATED COPPER

JACKET - RADIATION-CROSSLINKED,
MODIFIED ETFE

CONSTRUCTION DETAILS

PART NUMBER	CONDUCTOR SIZE (AWG)	SHIELD STRAND THICKNESS (± .0004)	JACKET THICKNESS (in.)		DIAMETER (in.)			WEIGHT (lbs/1000 ft.)	
			LOWER SPEC LIMIT	TARGET WALL	LOWER SPEC LIMIT	TARGET VALUE	UPPER SPEC LIMIT	TARGET VALUE	UPPER SPEC LIMIT
55PC2132-26-*	26	.0015	.0060	.0080	.084	.089	.094	6.71	7.22
55PC2132-24-*	24	.0015	.0060	.0080	.095	.100	.105	8.89	9.45
55PC2132-22-*	22	.0015	.0060	.0080	.108	.113	.118	12.09	12.72
55PC2132-20-*	20	.0015	.0065	.0085	.126	.131	.136	17.21	17.95
55PC2132-18-*	18	.0015	.0065	.0085	.146	.152	.157	24.62	25.60
55PC2132-16-*	16	.0015	.0065	.0085	.161	.168	.175	30.67	31.93
55PC2132-14-*	14	.0015	.0070	.0090	.194	.200	.206	45.38	46.79
55PC2132-12-*	12	.0015	.0070	.0090	.235	.241	.248	67.69	69.54

CABLE RATINGS AND ADDITIONAL REQUIREMENTS

TEMPERATURE RATING: 200°C

Maximum continuous conductor temperature

VOLTAGE RATING: 600 volts (rms)

DIELECTRIC WITHSTAND: 1500 volts (rms), 60 Hz

CROSSLINK VERIFICATION: 300 ± 3°C for 1 hour

JACKET COLOR: White preferred

JACKET ELONGATION AND TENSILE STRENGTH:

Elongation, 50% (minimum)

Tensile Strength, 5000 lbf/in² (minimum)

JACKET FLAWS:

Spark Test, 1000 volts (rms), 60 Hz, 100% test

Impulse Dielectric Test, 6.0 kV (peak), 100% test

SHIELD COVERAGE: 85% (minimum)

VOLTAGE WITHSTAND TEST (POST ENVIRONMENTAL):

1000 volts (rms), 60 Hz, 1 minute

PART NUMBER:

The "*" in the part numbers above shall be replaced by color code designators with a slash separating the component wire colors and a dash separating the component wire colors from the jacket color.

Example: AWG 22, red, blue and yellow component white jacket: 55PC2132-22-2/6/4-9

COLOR AND COLOR CODE DESIGNATORS SHALL BE IN ACCORDANCE WITH MIL-STD-881.

THIS SPECIFICATION SHEET TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HERIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.

Raychem

Raychem Corporation
300 Constitution Drive, Menlo Park, California 94025
1-800-2-Raychem Fax: 1-415-361-6292

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[55PC2132-22-9/93/96-9](#) [55PC2132-20-9/93/96-9](#) [55PC2132-22-3/6/9-9](#) [55PC2132-16-3/6/9-9CS2679](#) [55PC2132-24-3/6/9-9](#)