


LOW VOLTAGE DC MOTOR CONTROLLER

■ GENERAL DESCRIPTION

The **NJM2606/06A** are integrated circuits with wide operating supply voltage range for DC motor speed control. Especially, the **NJM2606A** is suited for the applications requiring low saturation output voltage.

■ PACKAGE OUTLINE



NJM2606D
NJM2606AD




NJM2606M
NJM2606AM

■ FEATURES


- Operating Voltage (1.8V to 8V)
- Internal Low Saturation Voltage Output Transistor
- Package Outline DIP8, DMP8
- Bipolar Technology

■ PIN CONFIGURATION

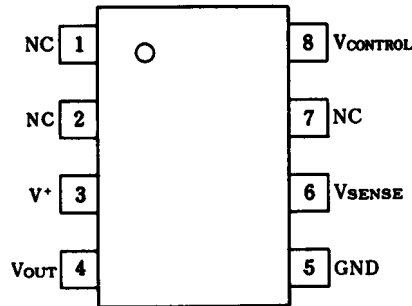

NJM2606D
NJM2606AD
NJM2606M
NJM2606AM

■ BLOCK DIAGRAM

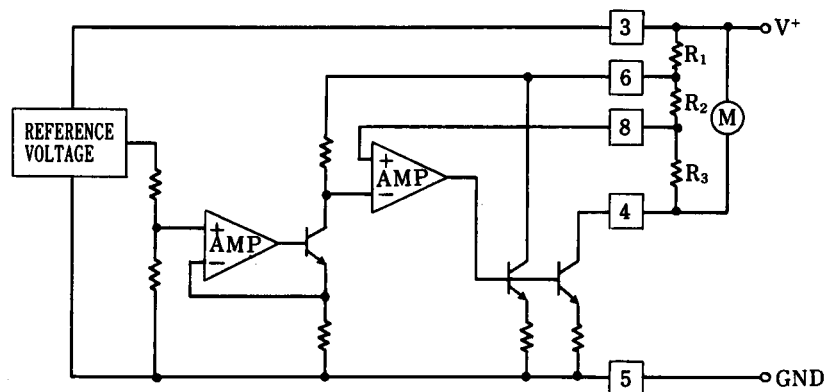

NJM2606 / 2606A

■ ABSOLUTE MAXIMUM RATINGS

($T_a=25^\circ\text{C}$)

| PARAMETER | SYMBOL | RATINGS | UNIT |
|-----------------------------|-----------|------------|------------------|
| Supply Voltage | V^+ | 10 | V |
| Peak-to-peak Output Current | I_{OP} | 700 | mA |
| Power Dissipation | P_D | (DIP) 500 | mW |
| | | (DMP8) 300 | mW |
| Operating Temperature Range | T_{opr} | -20 to 75 | $^\circ\text{C}$ |
| Storage Temperature Range | T_{stg} | -40 to 125 | $^\circ\text{C}$ |

(note)At SW ON. (3 sec. at motor locked or 100msec at duty factor less than 0.1%)

■ ELECTRICAL CHARACTERISTICS


($T_a=25^\circ\text{C}$, $V^+=3\text{V}$, $I_M=100\text{mA}$)

| PARAMETER | SYMBOL | TEST CONDITION | MIN. | TYP. | MAX. | UNIT |
|---------------------------|------------------|---|------|------|------|-----------------------|
| Operating Current | I_{CC} | | - | 2.4 | 6.0 | mA |
| Output Saturation Voltage | | | | | | |
| NJM2606 | V_{OSAT} | | - | 0.18 | 0.3 | V |
| NJM2606A | V_{OSAT} | | - | 0.13 | 0.18 | V |
| Reference Voltage | V_{REF} | | 0.18 | 0.20 | 0.22 | V |
| vs. Operating Voltage | ΔV_{RSV} | $V^+=1.8\text{V to }8.0\text{V}$ | - | 0.7 | 8.0 | mV |
| vs. Output Current | ΔV_{ROC} | $I_M=20\text{mA to }200\text{mA}$ | - | 2.7 | 9.0 | mV |
| vs. Ambient Temperature | ΔV_{RT} | $T_a=-20^\circ\text{C to }+75^\circ\text{C}$ | - | 0.04 | - | mV / $^\circ\text{C}$ |
| Current Ratio | K | $I_M=50\text{mA to }150\text{mA}$ | 45 | 50 | 55 | |
| vs. Operating Voltage | ΔK_{SV} | $V^+=1.8\text{V to }8.0\text{V}$ $I_M=50\text{mA to }150\text{mA}$ | - | 0.6 | 3.0 | |
| vs. Output Current | ΔK_{OC} | $I_M=(20\text{ to }50)\text{mA to } (170\text{ to }200)\text{mA}$ | - | 1.0 | 4.0 | |
| vs. Ambient Temperature | ΔK_{TC} | $T_a=-20^\circ\text{C to }+75^\circ\text{C}$ $I_M=50\text{mA to }150\text{mA}$ | - | 1.0 | - | 1 / $^\circ\text{C}$ |

■ TYPICAL CHARACTERISTICS


Reference Voltage vs. Operating Voltage

($I_M=100\text{mA}$, $T_a=25^\circ\text{C}$)

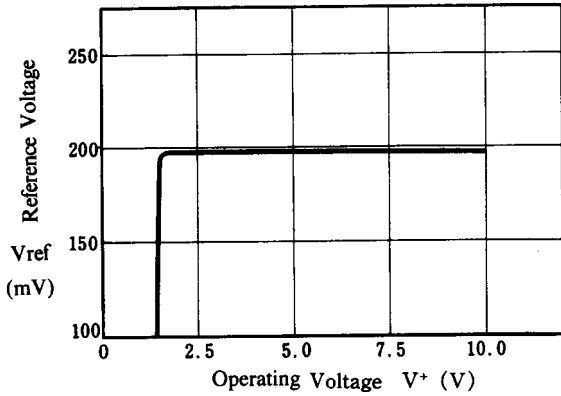


Reference Voltage vs. Motor Current

($V^+=3\text{V}$, $T_a=25^\circ\text{C}$)

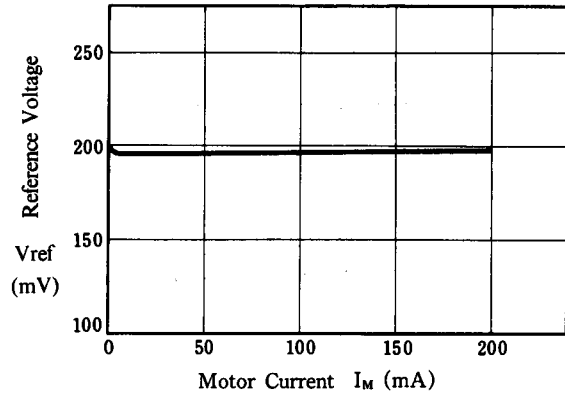


Reference Voltage vs. Temperature

($V^+=3\text{V}$)

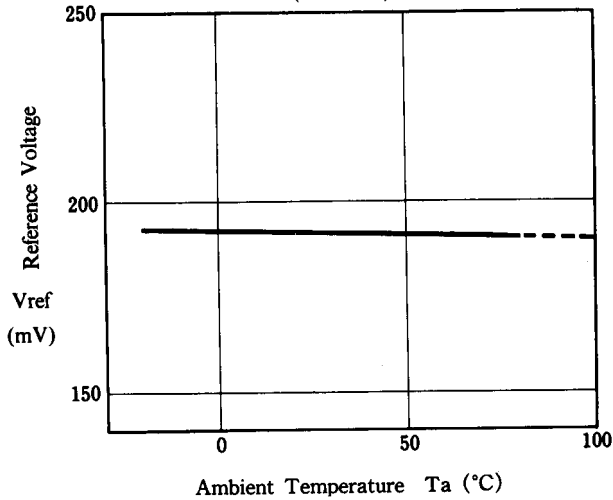


Operating Current vs. Operating Voltage

($T_a=25^\circ\text{C}$)

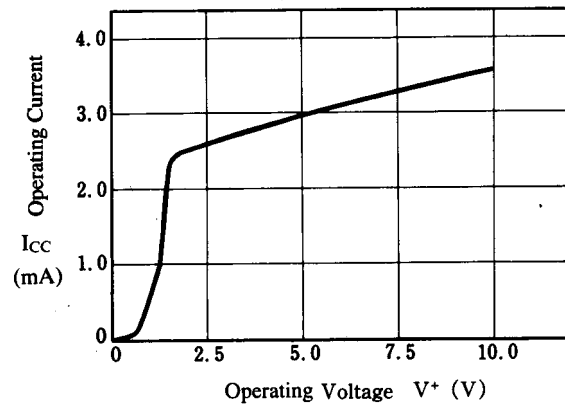


Output Saturation Voltage vs. Motor Current

($V^+=3\text{V}$, $T_a=25^\circ\text{C}$)

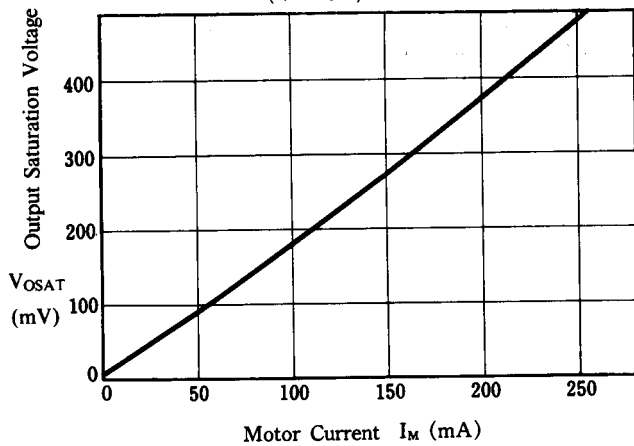

Current Ratio vs. Operating Voltage

($I_M=50-150\text{mA}$, $T_a=25^\circ\text{C}$)

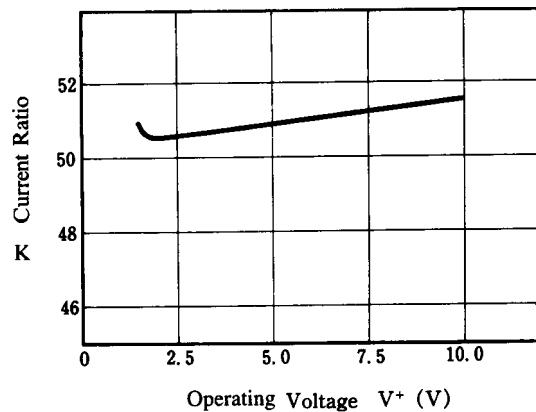


NJM2606 / 2606A

■ TYPICAL CHARACTERISTICS


Current Ratio vs. Motor Current

($V^+ = 3V$, $T_a = 25^\circ C$)

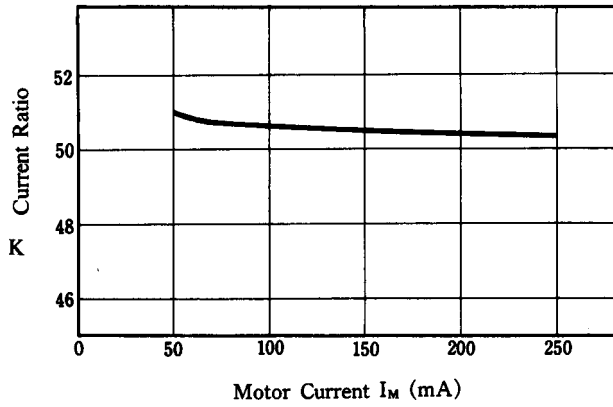


Current Ratio vs. Temperature

($V^+ = 3V$, $I_M = 50 \sim 150mA$)

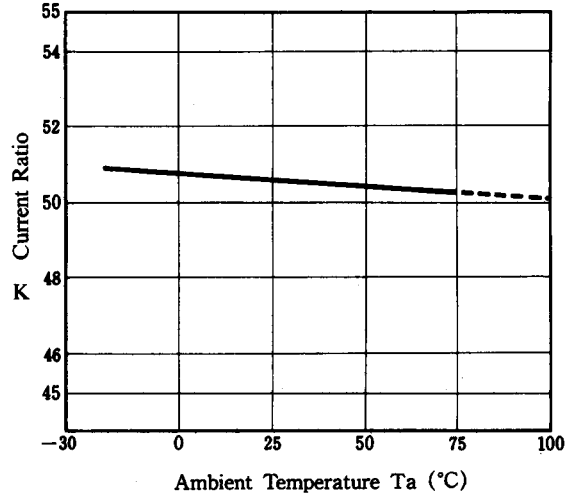


Rotation vs. Torque


($V^+ = 3V$, $T_a = 25^\circ C$)

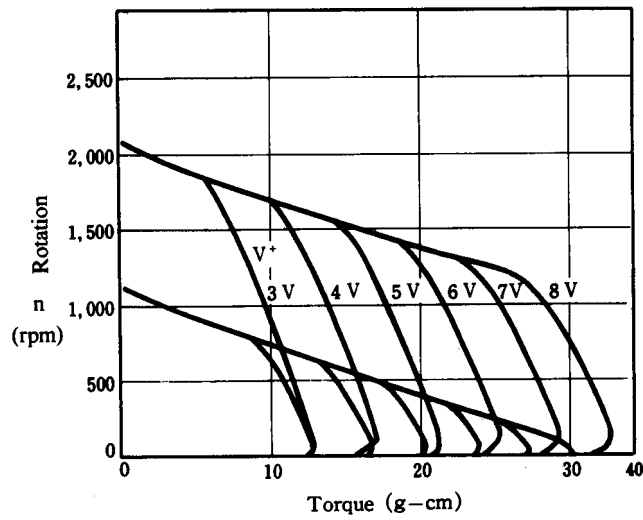

■ TYPICAL APPLICATION

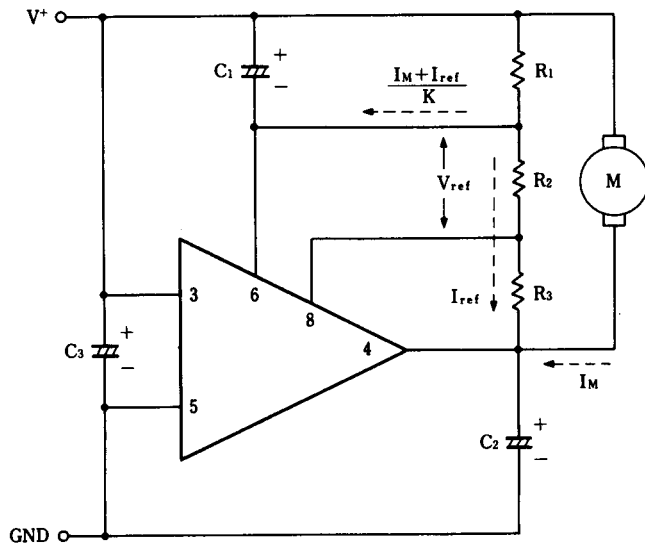

Select C₁, C₂, C₃ for each motor type.



- V_{ref} : Reference Voltage
- K : Current Ratio
- I_M : Motor Current
- R_M : Internal Resistance of Motor
- E_O : Motor Counter Electromotive Voltage

The voltage applied at the motor is set as V_M, which brings the following formula.

$$V_M = (R_1 + R_2 + R_3) I_{ref} + R_1 \cdot \frac{I_M + I_{ref}}{K}$$

Now that, $I_{ref} = V_{ref} / R_2$ so that, ($I_{ref} = 100 \mu A$ setting is appropriate)

$$V_M = \frac{V_{ref}}{R_2} (R_1 + \frac{R_1}{K} + R_2 + R_3) + \frac{R_1}{K} I_M \quad \dots (1)$$

On the other hand, the voltage applied at the motor itself will be as in the following.

$$V_M = E_O + R_M \cdot I_M \quad \dots (2)$$

Through (1), (2), and then leading to stabilize the control system.

$$R_M \cdot I_M > \frac{R_1}{K} \cdot I_M$$

$$\therefore R_1 < K \cdot R_M \quad \dots (3)$$

Taking in consideration of deviations, $R_{1(MAX)} < K_{(MIN)} \cdot R_{M(MIN)}$ with the condition.

Items required checking in regard to the temperature coefficient

IC items

1. Reference voltage : Temperature coefficient of V_{ref}.
2. Current Ratio : Temperature coefficient of K

*1 External component items

3. Temperature coefficient of R₁, R₂ and R₃
The relation among these 3 parts takes the very important roll.
4. Temperature coefficient of motor internal resistance
5. Temperature coefficient of motor generative voltage
6. Temperature coefficient ratio of R₁ and R_M

Count up from 3.4.

[CAUTION]
The specifications on this databook are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[NJR:](#)

[NJM2606AM-TE3](#) [NJM2606AM-TE2](#) [NJM2606AD](#) [NJM2606AM](#)