

Thin-Film Directional Couplers



CP0402 High Directivity LGA Termination

GENERAL DESCRIPTION

ITF (Integrated Thin-Film) TECHNOLOGY

The ITF High Directivity LGA Coupler is based on thin-film multilayer technology. The technology provides a miniature part with excellent high frequency performance and rugged construction for reliable automatic assembly.

The ITF Coupler is offered in a variety of frequency bands compatible with various types of high frequency wireless systems.

APPLICATIONS


- Mobile Communications
- Satellite TV Receivers
- GPS
- Vehicle Location Systems
- Wireless LAN's

FEATURES

- Inherent Low Profile
- Self Alignment during Reflow
- Excellent Solderability
- Low Parasitics
- Better Heat Dissipation
- Operating/Storage Temp
-40°C to +85°C
- Power Rating 3W RF Cont

DIMENSIONS: (Bottom View)

millimeters (inches)

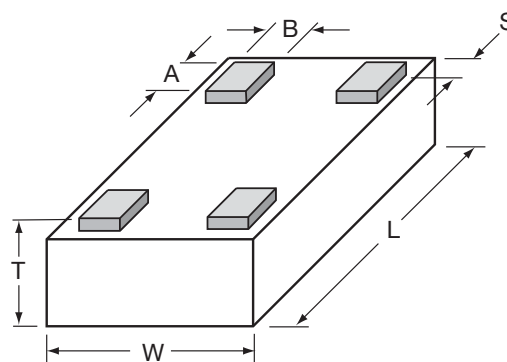

L	1.00±0.05 (0.040±0.002)
W	0.58±0.04 (0.023±0.002)
T	0.35±0.05 (0.014±0.002)

A	0.20±0.05 (0.008±0.002)
B	0.18±0.05 (0.007±0.002)
S	0.05±0.05 (0.002±0.002)

HOW TO ORDER

CP T Style Directional Coupler	0402 T Size 0402	X T Type	**** T Frequency (MHz)	X T Sub Type	N T LGA Termination L = LGA Sn90, Pb10 **N = LGA Sn100 **RoHS compliant	TR T Packaging Code TR = Tape and Reel
---	---	------------------------------	---	----------------------------------	---	---

QUALITY INSPECTION


Finished parts are 100% tested for electrical parameters and visual characteristics. Each production lot is evaluated on a sample basis for:

- Static Humidity: 85°C, 85% RH, 160 hours
- Endurance: 125°C, I_R, 4 hours


TERMINATION

Sn90Pb10 or Lead-Free Sn100 Nickel/Solder coating compatible with automatic soldering technologies: reflow, wave soldering, vapor phase and manual.

ORIENTATION IN TAPE

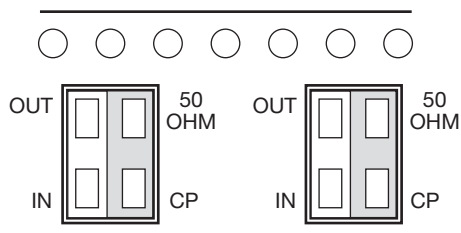

TERMINALS (Top View)

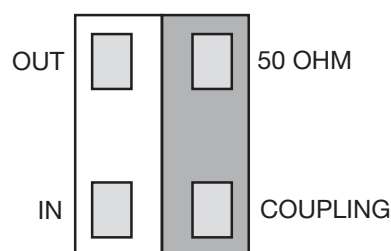


Not RoHS Compliant



For RoHS compliant products,
please select correct termination style.

Recommended Pad Layout Dimensions

mm (inches)

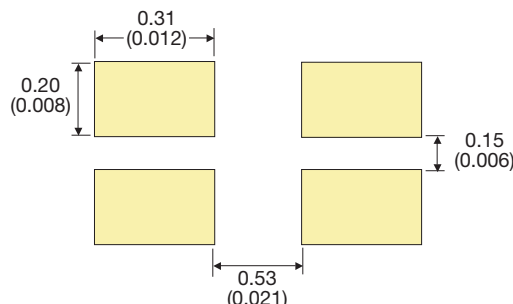

*The recommended distance to the PCB Ground Plane is 0.254mm (0.010")




Thin-Film Directional Couplers



CP0402 High Directivity LGA Termination

CP0402 - TYPE SELECTION CHART

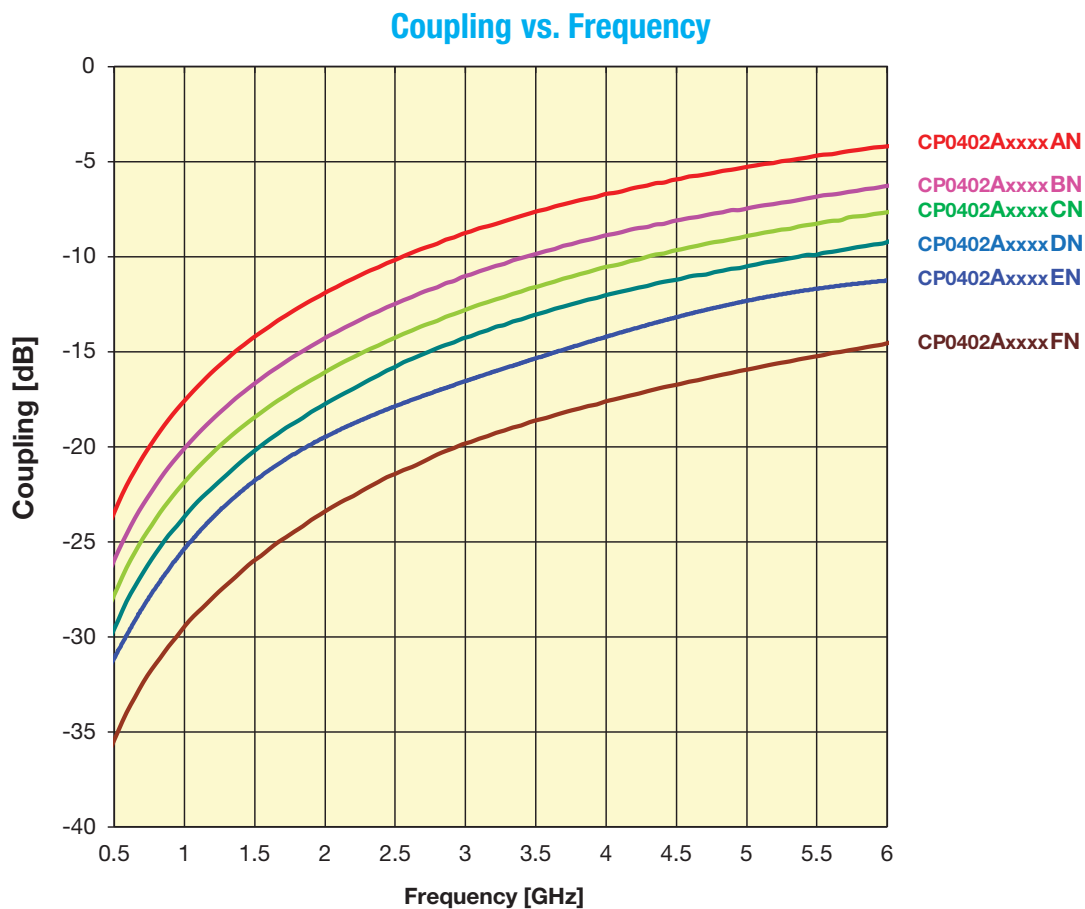

Intermediate coupling factors are readily available.
Please contact factory.

Thin-Film Directional Couplers




CP0402 High Directivity LGA Termination

Coupler P/N CP0402AxxxxAN

Application	P/N Examples*	Frequency Band [MHz]	Coupling [dB]	I. Loss max. [dB]	Return Loss [dB]	Directivity [dB]
AMPS	CP0402A0836AN	824 - 849	19.10	0.25	32	21
	CP0402A0881AN	869 - 894	18.60	0.25	31	
GSM	CP0402A0902AN	890 - 915	18.50	0.25	31	
	CP0402A0947AN	935 - 960	18.00	0.25	31	
E-GSM	CP0402A0897AN	880 ÷ 915	18.50	0.25	31	
	CP0402A0942AN	925 ÷ 960	18.00	0.25	31	
PDC	CP0402A1441AN	1429 - 1453	14.50	0.40	28	
PCN	CP0402A1747AN	1710 - 1785	13.00	0.50	26	
	CP0402A1842AN	1805 - 1880	12.50	0.50	26	
PCS	CP0402A1880AN	1850 - 1910	12.30	0.50	25	
	CP0402A1960AN	1930 - 1990	12.00	0.50	25	
PHP	CP0402A1907AN	1895 - 1920	12.30	0.50	25	
DECT	CP0402A1890AN	1880 - 1900	12.30	0.50	25	
Wireless LAN	CP0402A2442AN	2400 - 2484	10.30	0.70	23	
	CP0402A3500AN	3450 - 3550	7.60	1.30	15	14
WiFi	CP0402A5000AN	4950 - 5050	5.00	1.50	15	13
	CP0402A5500AN	5450 - 5550	4.60	1.50	14	13
	CP0402A6000AN	5950 - 6050	4.00	1.50	14	13


CP0402AxxxxANTR

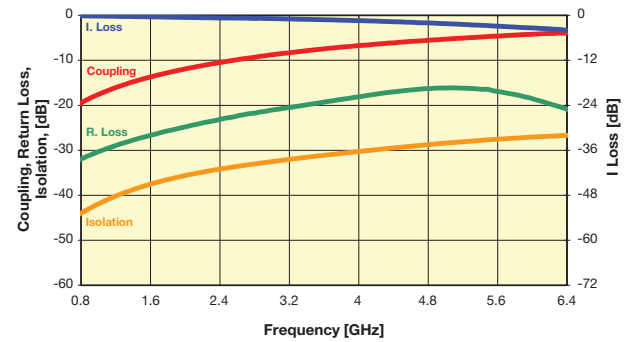

Coupler P/N CP0402AxxxxBN

Application	P/N Examples	Frequency Band [MHz]	Coupling [dB]	I. Loss max. [dB]	Return Loss [dB]	Directivity [dB]
AMPS	CP0402A0836BN	824 - 849	22.00	0.20	28	27
	CP0402A0881BN	869 - 894	21.70	0.20	28	
GSM	CP0402A0902BN	890 - 915	21.50	0.20	28	
	CP0402A0947BN	935 - 960	21.00	0.25	27	
E-GSM	CP0402A0897BN	880 ÷ 915	21.50	0.20	28	
	CP0402A0942BN	925 ÷ 960	21.00	0.25	27	
PDC	CP0402A1441BN	1429 - 1453	17.50	0.25	24	
PCN	CP0402A1747BN	1710 - 1785	16.00	0.30	23	
	CP0402A1842BN	1805 - 1880	15.50	0.35	23	
PCS	CP0402A1880BN	1850 - 1910	15.50	0.35	23	
	CP0402A1960BN	1930 - 1990	15.00	0.35	22	
PHP	CP0402A1907BN	1895 - 1920	15.50	0.35	23	
DECT	CP0402A1890BN	1880 - 1900	15.50	0.35	23	
Wireless LAN	CP0402A2442BN	2400 - 2484	13.30	0.40	21	
	CP0402A3500BN	3450 - 3550	9.40	0.80	18	14
WiFi	CP0402A5000BN	4950 - 5050	7.40	1.20	14	13
	CP0402A5500BN	5450 - 5550	6.70	1.60	14	13
	CP0402A6000BN	5950 - 6050	6.10	2.00	14	13


CP0402AxxxxBNTR

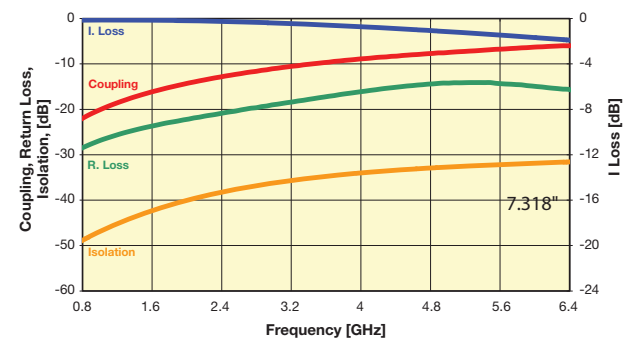

Coupler P/N CP0402AxxxxCN

Application	P/N Examples	Frequency Band [MHz]	Coupling [dB]	I. Loss max. [dB]	Return Loss [dB]	Directivity [dB]
AMPS	CP0402A0836CN	824 - 849	23.60	0.20	33	22
	CP0402A0881CN	869 - 894	23.00	0.20	33	
GSM	CP0402A0902CN	890 - 915	23.00	0.20	26	
	CP0402A0947CN	935 - 960	22.50	0.20	33	
E-GSM	CP0402A0897CN	880 ÷ 915	23.00	0.20	25	
	CP0402A0942CN	925 ÷ 960	22.50	0.20	32	
PDC	CP0402A1441CN	1429 - 1453	19.00	0.25	31	
PCN	CP0402A1747CN	1710 - 1785	17.20	0.25	30	
	CP0402A1842CN	1805 - 1880	17.00	0.25	30	
PCS	CP0402A1880CN	1850 - 1910	16.80	0.25	30	
	CP0402A1960CN	1930 - 1990	16.50	0.25	29	19
PHP	CP0402A1907CN	1895 - 1920	16.80	0.25	29	
DECT	CP0402A1890CN	1880 - 1900	16.80	0.25	30	
Wireless LAN	CP0402A2442CN	2400 - 2484	14.70	0.45	28	
	CP0402A3500CN	3450 - 3550	10.97	0.67	23	17
WiFi	CP0402A5000CN	4950 - 5050	8.00	1.00	21	16
	CP0402A5500CN	5450 - 5550	7.50	1.10	21	15
	CP0402A6000CN	5950 - 6050	7.10	1.30	23	15

CP0402AxxxxCNTR

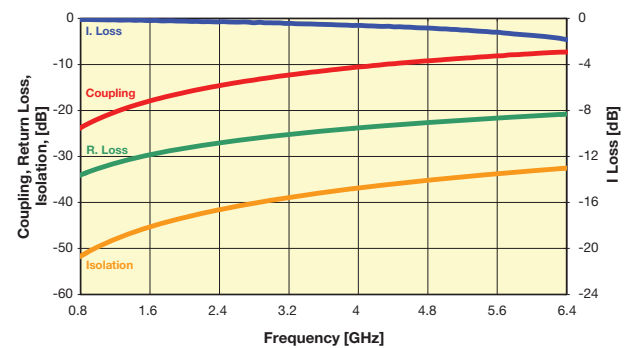

Important: Couplers can be used at any frequency within the indicated range.



Thin-Film Directional Couplers




CP0402 High Directivity LGA Termination

Coupler P/N CP0402AxxxxDN

Application	P/N Examples*	Frequency Band [MHz]	Coupling [dB]	I. Loss max. [dB]	Return Loss [dB]	Directivity [dB]
AMPS	CP0402A0836DN	824 - 849	25.20	0.20	29	20
	CP0402A0881DN	869 - 894	24.80	0.20	28	
GSM	CP0402A0902DN	890 - 915	24.70	0.20	28	
	CP0402A0947DN	935 - 960	24.10	0.20	28	
E-GSM	CP0402A0897DN	880 ÷ 915	24.70	0.20	28	18
	CP0402A0942DN	925 ÷ 960	24.10	0.20	28	
PDC	CP0402A1441DN	1429 - 1453	20.50	0.20	25	
	CP0402A1747DN	1710 - 1785	19.00	0.20	24	
PCN	CP0402A1842DN	1805 - 1880	18.50	0.25	23	17
PCS	CP0402A1880DN	1850 - 1910	18.20	0.25	23	
	CP0402A1960DN	1930 - 1990	18.00	0.25	23	
PHP	CP0402A1907DN	1895 - 1920	18.10	0.25	23	
DECT	CP0402A1890DN	1880 - 1900	18.20	0.25	23	16
Wireless LAN	CP0402A2442DN	2400 - 2484	16.00	0.35	22	
	CP0402A3500DN	3450 - 3550	12.50	0.46	21	
	CP0402A5000DN	4950 - 5050	10.00	0.65	21	
WiFi	CP0402A5500DN	5450 - 5550	9.60	0.76	20	15
	CP0402A6000DN	5950 - 6050	9.10	0.84	20	15


CP0402AxxxxDNTR

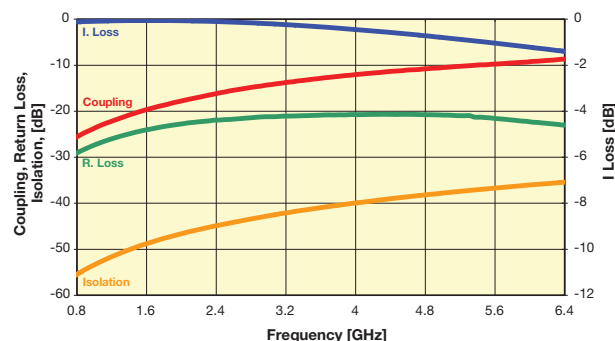

Coupler P/N CP0402AxxxxEN

Application	P/N Examples	Frequency Band [MHz]	Coupling [dB]	I. Loss max. [dB]	Return Loss [dB]	Directivity [dB]
AMPS	CP0402A0836EN	824 - 849	27.20	0.20	35	25
	CP0402A0881EN	869 - 894	26.80	0.20	34	
GSM	CP0402A0902EN	890 - 915	26.50	0.20	34	
	CP0402A0947EN	935 - 960	26.00	0.20	34	
E-GSM	CP0402A0897EN	880 ÷ 915	26.50	0.20	34	23
	CP0402A0942EN	925 ÷ 960	26.00	0.20	34	
PDC	CP0402A1441EN	1429 - 1453	22.30	0.25	29	
	CP0402A1747EN	1710 - 1785	20.50	0.25	27	
PCN	CP0402A1842EN	1805 - 1880	20.30	0.25	26	16
PCS	CP0402A1880EN	1850 - 1910	20.00	0.25	26	
	CP0402A1960EN	1930 - 1990	20.00	0.25	26	
PHP	CP0402A1907EN	1895 - 1920	20.00	0.25	26	
DECT	CP0402A1890EN	1880 - 1900	20.00	0.25	26	13
Wireless LAN	CP0402A2442EN	2400 - 2484	18.00	0.35	23	
	CP0402A3500EN	3450 - 3550	15.00	0.37	20	
	CP0402A5000EN	4950 - 5050	12.50	0.50	18	
WiFi	CP0402A5500EN	5450 - 5550	11.50	0.65	16	13
	CP0402A6000EN	5950 - 6050	11.10	0.70	15	13


CP0402AxxxxENTR

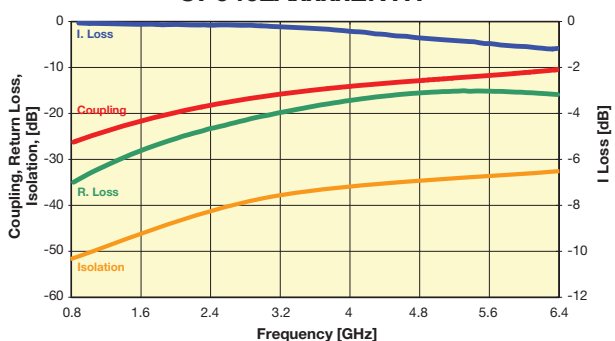

Coupler P/N CP0402AxxxxFN

Application	P/N Examples	Frequency Band [MHz]	Coupling [dB]	I. Loss max. [dB]	Return Loss [dB]	Directivity [dB]
AMPS	CP0402A0836FN	824 - 849	31.00	0.20	29.10	11
	CP0402A0881FN	869 - 894	30.70	0.20	28.60	
GSM	CP0402A0902FN	890 - 915	30.60	0.20	28.50	
	CP0402A0947FN	935 - 960	30.00	0.20	28.10	
E-GSM	CP0402A0897FN	880 ÷ 915	30.60	0.20	28.50	9
	CP0402A0942FN	925 ÷ 960	30.00	0.20	28.10	
PDC	CP0402A1441FN	1429 - 1453	26.50	0.20	25.00	
	CP0402A1747FN	1710 - 1785	25.00	0.20	23.80	
PCN	CP0402A1842FN	1805 - 1880	24.50	0.20	23.60	8
PCS	CP0402A1880FN	1850 - 1910	24.20	0.20	23.50	
	CP0402A1960FN	1930 - 1990	24.00	0.20	23.30	
PHP	CP0402A1907FN	1895 - 1920	24.20	0.20	23.40	
DECT	CP0402A1890FN	1880 - 1900	24.20	0.20	23.50	7.5
Wireless LAN	CP0402A2442FN	2400 - 2484	22.00	0.25	22.60	
	CP0402A3500FN	3450 - 3550	18.00	0.27	22.00	
	CP0402A5000FN	4950 - 5050	15.70	0.30	23.01	
WiFi	CP0402A5500FN	5450 - 5550	15.20	0.30	20.36	7.5
	CP0402A6000FN	5950 - 6050	14.50	0.30	18.94	7.5

CP0402AxxxxFNTR

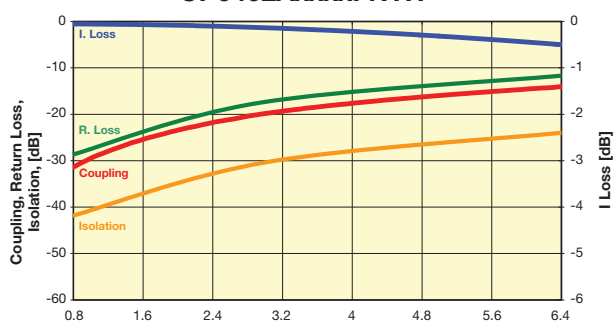

Important: Couplers can be used at any frequency within the indicated range.

Thin-Film Directional Couplers

CP0402 / CP0603 High Directivity Couplers Test Jigs

GENERAL DESCRIPTION

These jigs are designed for testing the CP0402 and CP0603 High Directivity Couplers using a Vector Network Analyzer.

They consist of a dielectric substrate, having 50Ω microstrips as conducting lines and a bottom ground plane located at a distance of 0.254mm (0.010") from the microstrips.

The substrate used is Neltec's NH9338ST0254C1BC.

The connectors are SMA type (female), 'Johnson Components Inc.' Product P/N: 142-0701-841.

Both a measurement jig and a calibration jig are provided.

The calibration jig is designed for a full 2-port calibration, and consists of an open line, short line and through line. LOAD calibration can be done by a 50Ω SMA termination.

MEASUREMENT PROCEDURE

When measuring a component, it can be either soldered or pressed using a non-metallic stick until all four ports touch the appropriate pads. Set the VNA to the relevant frequency band. Connect the VNA using a 10dB attenuator on the jig

terminal connected to port 2. Follow the VNA's instruction manual and use the [calibration jig](#) to perform a full 2-Port calibration in the required bandwidths.

Place the coupler on the [measurement jig](#) as follows:

Input (Coupler) → Connector 1 (Jig) Termination (Coupler) → Connector 3 (Jig)
Output (Coupler) → Connector 2 (Jig) Coupling (Coupler) → Connector 4 (Jig)

To measure I. Loss connect:


Connector 1 (Jig) → Port 1 (VNA) Connector 3 (Jig) → 50Ω
Connector 2 (Jig) → Port 2 (VNA) Connector 4 (Jig) → 50Ω

To measure R. Loss and Coupling connect:

Connector 1 (Jig) → Port 1 (VNA) Connector 3 (Jig) → 50Ω
Connector 2 (Jig) → 50Ω Connector 4 (Jig) → Port 2 (VNA)

To measure Isolation connect:

Connector 1 (Jig) → 50Ω Connector 3 (Jig) → 50Ω
Connector 2 (Jig) → Port 1 (VNA) Connector 4 (Jig) → Port 2 (VNA)

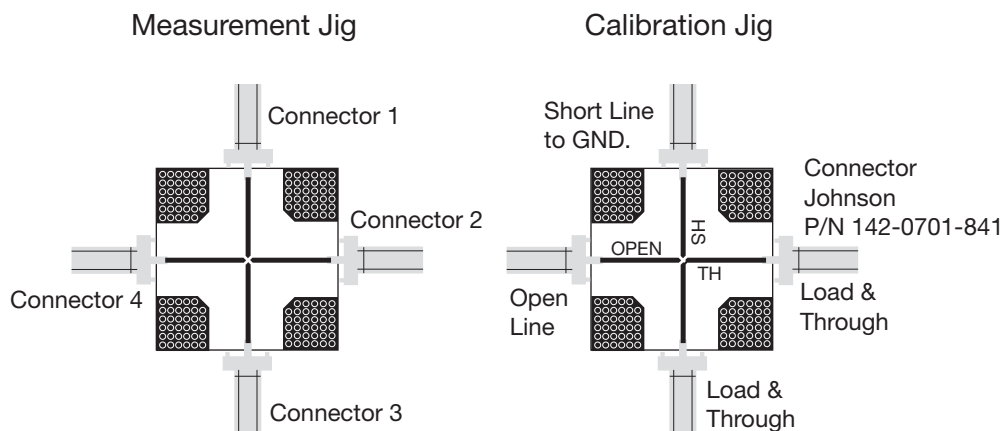

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

AVX:

<u>CP0402A0902BNTR</u>	<u>CP0402A2140ENTR</u>	<u>CP0402A2442DLTR</u>	<u>CP0402A2442ENTR</u>	<u>CP0402A0947FLTR</u>
<u>CP0402A1810BNTR</u>	<u>CP0402A1880ANTR</u>	<u>CP0402A1880CLTR</u>	<u>CP0402A1880DLTR</u>	<u>CP0402A1880ELTR</u>
<u>CP0402A0836ANTR</u>	<u>CP0402A0836CNTR</u>	<u>CP0402A0836ELTR</u>	<u>CP0402A0881ALTR</u>	<u>CP0402A0902ALTR</u>
<u>CP0402A0942DLTR</u>	<u>CP0402A1441ALTR</u>	<u>CP0402A1842ALTR</u>	<u>CP0402A1880BNTR</u>	<u>CP0402A1950ALTR</u>
<u>CP0402A1960ALTR</u>	<u>CP0402A1960ELTR</u>	<u>CP0402A2442ALTR</u>	<u>CP0402A2442ELTR</u>	<u>CP0402A3200ALTR</u>
<u>CP0402A3500ELTR</u>	<u>CP0402A3600BLTR</u>	<u>CP0402A4200ELTR</u>	<u>CP0402A4600ELTR</u>	<u>CP0402A6000DLTR</u>
<u>CP0402A6000ELTR</u>	<u>CP0402A6000FLTR</u>	<u>CP0402A0707ANTR</u>	<u>CP0402A0781ANTR</u>	<u>CP0402A0836DNTR</u>
<u>CP0402A0898ANTR</u>	<u>CP0402A1732CNTR</u>	<u>CP0402A1747FNTR</u>	<u>CP0402A1950BNTR</u>	<u>CP0402A1950DNTR</u>
<u>CP0402A2400ENTR</u>	<u>CP0402A2442BLTR</u>	<u>CP0402A2442DNTR</u>	<u>CP0402A2535FNTR</u>	<u>CP0402A3500BNTR</u>
<u>CP0402A4000FNTR</u>	<u>CP0402A4200ENTR</u>	<u>CP0402A4600ENTR</u>	<u>CP0402A1441ANTR</u>	<u>CP0402A1960ANTR</u>
<u>CP0402A1907DLTR</u>	<u>CP0402A0836ALTR</u>	<u>CP0402A0836BLTR</u>	<u>CP0402A0836CLTR</u>	<u>CP0402A0942ALTR</u>
<u>CP0402A1810CNTR</u>	<u>CP0402A1842DLTR</u>	<u>CP0402A1880ALTR</u>	<u>CP0402A1880BLTR</u>	<u>CP0402A1880CNTR</u>
<u>CP0402A1880DNTR</u>	<u>CP0402A1880ENTR</u>	<u>CP0402A1950BLTR</u>	<u>CP0402A1950CLTR</u>	<u>CP0402A1950DLTR</u>
<u>CP0402A1950ELTR</u>	<u>CP0402A1950FLTR</u>	<u>CP0402A1960DLTR</u>	<u>CP0402A2140ELTR</u>	<u>CP0402A2400ELTR</u>
<u>CP0402A2400FLTR</u>	<u>CP0402A2442FLTR</u>	<u>CP0402A0450ALTR</u>	<u>CP0402A0836BNTR</u>	<u>CP0402A0836ENTR</u>
<u>CP0402A0851ANTR</u>	<u>CP0402A0881ANTR</u>	<u>CP0402A0915BNTR</u>	<u>CP0402A0942BLTR</u>	<u>CP0402A0942FLTR</u>
<u>CP0402A0947ALTR</u>	<u>CP0402A1747ALTR</u>	<u>CP0402A1880FNTR</u>	<u>CP0402A1890ALTR</u>	<u>CP0402A1890ELTR</u>
<u>CP0402A1950ENTR</u>	<u>CP0402A1960CNTR</u>	<u>CP0402A1960DNTR</u>	<u>CP0402A2350FLTR</u>	<u>CP0402A2442ANTR</u>
<u>CP0402A2442CLTR</u>	<u>CP0402A2442FNTR</u>	<u>CP0402A2447ALTR</u>	<u>CP0402A2500DLTR</u>	<u>CP0402A3500FLTR</u>
<u>CP0402A5250FLTR</u>	<u>CP0402A0836FNTR</u>	<u>CP0402A0897ANTR</u>	<u>CP0402A0902ELTR</u>	<u>CP0402A0902FLTR</u>