

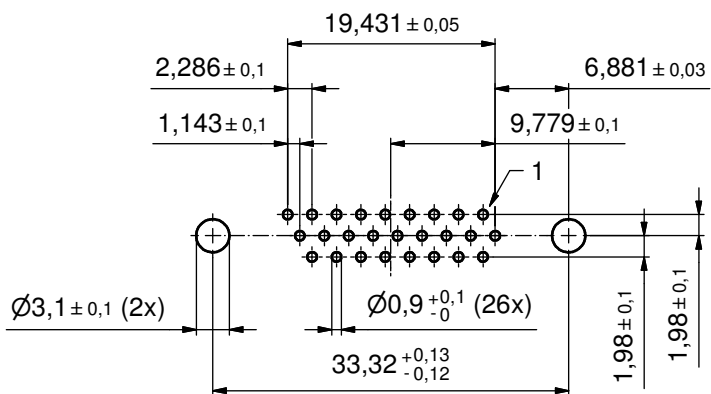
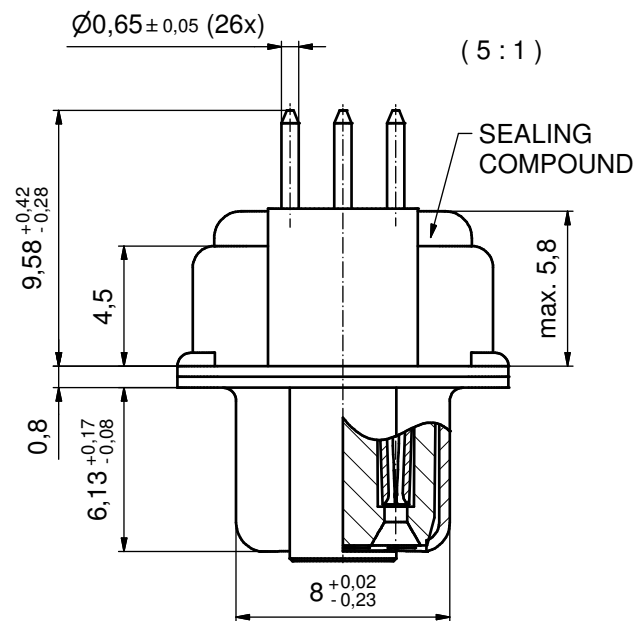
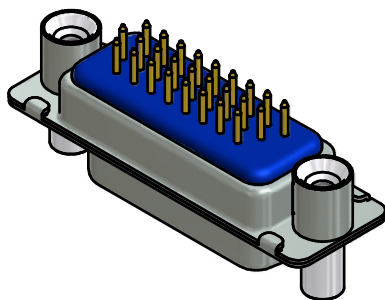


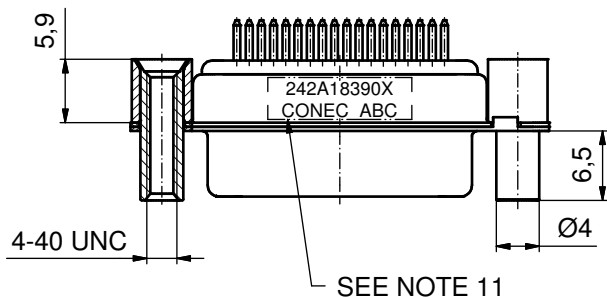

P.C.B. HOLE DRILLINGS
(P.C.B. TOP SIDE)

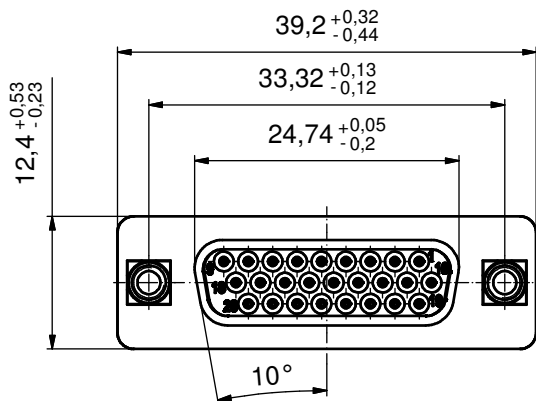

NOTES:

1. RoHS COMPLIANT
2. FOR WAVESOLDERING (SOLDER BATH TEMPERATURE 260°C FOR 5 SEC. AND SOLDER PREHEAT 100°C FOR 30 SEC.)
3. METALSHELLS: STEEL; min. 315µin TIN over 40-80µin NICKEL
4. INSULATORS: HIGH TEMPERATURE PLASTIC UL 94 V-0; BLACK
5. CONTACTS: COPPER ALLOY
PLATING: GOLD FLASH over NICKEL
6. THREADED REAR SPACERS / FRONT THREADED LOCKS:
COPPER ALLOY; min. 200µin TIN over 80µin NICKEL
7. SLEEVES: COPPER ALLOY; min. 200µin TIN over 80µin NICKEL
8. CAPACITANCE: 370pF ± 20%
9. DIELECTRIC WITHSTANDING VOLTAGE: 300 VDC
10. MAXIMUM TORQUE VALUE FOR THREAD: 6 in.LB
11. CONNECTOR IS PART MARKED: 242A18390X CONEC ABC

Directive 2002/95/EC RoHS compliant

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH	DO NOT ALTER CAD DRAWING BY HAND				tolerance		 dim. in mm	scale: 2:1 (5:1)	
								material: SEE NOTES	
						date	name	title: D-SUB HD C FILTER FEMALE 26pos. SOLDER PIN STRAIGHT with threaded rear spacer and front threaded lock	
					drawn	16.12.11	Henneboel		
					appd.	16.12.11	Fischer		
					norm				
					d-old			dwg no: 24K1A1357	
								DIN-A3 sh: 1	
	a	Original							
	rev.	description	date	name	part no: 242A18390X				

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[CONEC:](#)

[242A18390X](#)