


Small-diameter Proximity Sensor E2E

Ultra small size and simple installation

- 104 model variations available.
- Improved sensing ranges for easy sensor positioning adjustment.
- High-speed response frequency stably detects moving objects: 5 kHz max.
- Four output LEDs for highly visible status indication.
- Special mounting brackets for reduced installation time.
- Stainless-steel Spiral Tube to protect against cable breakage is available (M4, M5 only).

* When the 4-dia. shielded model is used.



For the most recent information on models that have been certified for safety standards, refer to your OMRON website.

Features

Lineup of global small-diameter proximity sensors (3 dia., 4 dia., 6.5 dia., M4, M5)

- A lineup of unshielded models for long distance sensing is also available. Stable long distance sensing performance enables worry-free use.



Bright operation indicators make it easy to view sensor status

- Four indicator LEDs in a 360 degree layout are easily seen from all angles.



High-speed response enables sharp detection timing

- 5 kHz response frequency max.

Protection circuits prevent failures due to wiring mistakes.

- Load short-circuit protection and output reverse polarity protection circuits are incorporated.

Low current consumption: 10mA max

- Current consumption is 2/3 that of conventional small diameter proximity sensors.

Protective Stainless-steel Spiral Tubes available

- Lineup of protective tubes for M4 and M5 sizes. Reduces wire breakage due to snagging or impact.



E2E

E2E (Small Diameter) Model Number Legend

E2E- ① ② ③ ④ - ⑤ - ⑥ ⑦ ⑧

No.	Classification	Code	Meaning
①	Housing material and shape	S	SUS, threaded
		C	SUS, cylindrical
②	Size	03	Outer diameter 3 mm
		04	Outer diameter 4 mm
		05	Outer diameter 5 mm
		06	Outer diameter 6.5 mm
③	Shielding	S	Shielded Models
		N	Unshielded Models
④	Sensing distance	Number	R8: 0.8 mm, 12: 1.2 mm, 02: 2 mm, 03: 3 mm, 04: 4 mm
⑤	Connection method	WC	PVC Pre-wired Model
		MC	M8 Connector, 3-pin
		CJ	M8 Pre-wired Connector, 3-pin
⑥	Output specifications	B	DC 3-wire PNP open-collector output
		C	DC 3-wire NPN open-collector output
⑦	Operation mode	1	Normally open (NO)
		2	Normally closed (NC)
⑧	Cable length	Blank	Connector Models
		Number M	Cable length (Unit: m) (Applicable to Pre-wired Models 2M and Pre-wired Connector Models 0.3M)

Note: The purpose of this model number legend is to provide an understanding of the model numbers and how they correlate to sensor specifications. Models are not available for all combinations of code numbers.

Ordering Information

Proximity Sensors

Shielded Models [Refer to *Dimensions* on page 12.]



Appearance	Sensing distance	Connection method	Cable specifications	Operation mode	Wire color / Pin arrangement	Model	
						NPN output	PNP output
3 dia.	0.8 mm	Pre-wired Models (2 m)	PVC (oil-resistant)	NO	Brown: +V Black: Output Blue: 0 V	E2E-C03SR8-WC-C1 2M	E2E-C03SR8-WC-B1 2M
				NC		E2E-C03SR8-WC-C2 2M	E2E-C03SR8-WC-B2 2M
		M8 Pre-wired Connector Models (0.3 m)	PVC (oil-resistant)	NO	1: +V, 3: 0 V, 4: Output	E2E-C03SR8-CJ-C1 0.3M	E2E-C03SR8-CJ-B1 0.3M
				NC		E2E-C03SR8-CJ-C2 0.3M	E2E-C03SR8-CJ-B2 0.3M
4 dia.	1.2 mm	Pre-wired Models (2 m)	PVC (oil-resistant)	NO	Brown: +V Black: Output Blue: 0 V	E2E-C04S12-WC-C1 2M	E2E-C04S12-WC-B1 2M
				NC		E2E-C04S12-WC-C2 2M	E2E-C04S12-WC-B2 2M
		M8 Pre-wired Connector Models (0.3 m)	PVC (oil-resistant)	NO	1: +V, 3: 0 V, 4: Output	E2E-C04S12-CJ-C1 0.3M	E2E-C04S12-CJ-B1 0.3M
				NC		E2E-C04S12-CJ-C2 0.3M	E2E-C04S12-CJ-B2 0.3M
		M8 Connector Models	---	NO		E2E-C04S12-MC-C1	E2E-C04S12-MC-B1
				NC		E2E-C04S12-MC-C2	E2E-C04S12-MC-B2
6.5 dia.	2 mm	Pre-wired Models (2 m)	PVC (oil-resistant)	NO	Brown: +V Black: Output Blue: 0 V	E2E-C06S02-WC-C1 2M	E2E-C06S02-WC-B1 2M
				NC		E2E-C06S02-WC-C2 2M	E2E-C06S02-WC-B2 2M
		M8 Pre-wired Connector Models (0.3 m)	PVC (oil-resistant)	NO	1: +V, 3: 0 V, 4: Output	E2E-C06S02-CJ-C1 0.3M	E2E-C06S02-CJ-B1 0.3M
				NC		E2E-C06S02-CJ-C2 0.3M	E2E-C06S02-CJ-B2 0.3M
		M8 Connector Models	---	NO		E2E-C06S02-MC-C1	E2E-C06S02-MC-B1
				NC		E2E-C06S02-MC-C2	E2E-C06S02-MC-B2
M4	0.8 mm	Pre-wired Models (2 m)	PVC (oil-resistant)	NO	Brown: +V Black: Output Blue: 0 V	E2E-S04SR8-WC-C1 2M	E2E-S04SR8-WC-B1 2M
				NC		E2E-S04SR8-WC-C2 2M	E2E-S04SR8-WC-B2 2M
		M8 Pre-wired Connector Models (0.3 m)	PVC (oil-resistant)	NO	1: +V, 3: 0 V, 4: Output	E2E-S04SR8-CJ-C1 0.3M	E2E-S04SR8-CJ-B1 0.3M
				NC		E2E-S04SR8-CJ-C2 0.3M	E2E-S04SR8-CJ-B2 0.3M
M5	1.2 mm	Pre-wired Models (2 m)	PVC (oil-resistant)	NO	Brown: +V Black: Output Blue: 0 V	E2E-S05S12-WC-C1 2M	E2E-S05S12-WC-B1 2M
				NC		E2E-S05S12-WC-C2 2M	E2E-S05S12-WC-B2 2M
		M8 Pre-wired Connector Models (0.3 m)	PVC (oil-resistant)	NO	1: +V, 3: 0 V, 4: Output	E2E-S05S12-CJ-C1 0.3M	E2E-S05S12-CJ-B1 0.3M
				NC		E2E-S05S12-CJ-C2 0.3M	E2E-S05S12-CJ-B2 0.3M
		M8 Connector Models	---	NO		E2E-S05S12-MC-C1	E2E-S05S12-MC-B1
				NC		E2E-S05S12-MC-C2	E2E-S05S12-MC-B2

Unshielded Models [Refer to Dimensions on page 13.]



Appearance	Sensing distance	Connection method	Cable specifications	Operation mode	Wire color / Pin arrangement	Model	
						NPN output	PNP output
3 dia.	2 mm	Pre-wired Models (2 m)	PVC (oil-resistant)	NO	Brown: +V Black: Output Blue: 0 V	E2E-C03N02-WC-C1 2M	E2E-C03N02-WC-B1 2M
				NC		E2E-C03N02-WC-C2 2M	E2E-C03N02-WC-B2 2M
		M8 Pre-wired Connector Models (0.3 m)	PVC (oil-resistant)	NO	1: +V, 3: 0 V, 4: Output	E2E-C03N02-CJ-C1 2M	E2E-C03N02-CJ-B1 2M
				NC		E2E-C03N02-CJ-C2 2M	E2E-C03N02-CJ-B2 2M
4 dia.	3 mm	Pre-wired Models (2 m)	PVC (oil-resistant)	NO	Brown: +V Black: Output Blue: 0 V	E2E-C04N03-WC-C1 2M	E2E-C04N03-WC-B1 2M
				NC		E2E-C04N03-WC-C2 2M	E2E-C04N03-WC-B2 2M
		M8 Pre-wired Connector Models (0.3 m)	PVC (oil-resistant)	NO	1: +V, 3: 0 V, 4: Output	E2E-C04N03-CJ-C1 0.3M	E2E-C04N03-CJ-B1 0.3M
				NC		E2E-C04N03-CJ-C2 0.3M	E2E-C04N03-CJ-B2 0.3M
		M8 Connector Models	---	NO		E2E-C04N03-MC-C1	E2E-C04N03-MC-B1
				NC		E2E-C04N03-MC-C2	E2E-C04N03-MC-B2
6.5 dia.	4 mm	Pre-wired Models (2 m)	PVC (oil-resistant)	NO	Brown: +V Black: Output Blue: 0 V	E2E-C06N04-WC-C1 2M	E2E-C06N04-WC-B1 2M
				NC		E2E-C06N04-WC-C2 2M	E2E-C06N04-WC-B2 2M
		M8 Pre-wired Connector Models (0.3 m)	PVC (oil-resistant)	NO	1: +V, 3: 0 V, 4: Output	E2E-C06N04-CJ-C1 0.3M	E2E-C06N04-CJ-B1 0.3M
				NC		E2E-C06N04-CJ-C2 0.3M	E2E-C06N04-CJ-B2 0.3M
		M8 Connector Models	---	NO		E2E-C06N04-MC-C1	E2E-C06N04-MC-B1
				NC		E2E-C06N04-MC-C2	E2E-C06N04-MC-B2
M4	2 mm	Pre-wired Models (2 m)	PVC (oil-resistant)	NO	Brown: +V Black: Output Blue: 0 V	E2E-S04N02-WC-C1 2M	E2E-S04N02-WC-B1 2M
				NC		E2E-S04N02-WC-C2 2M	E2E-S04N02-WC-B2 2M
		M8 Pre-wired Connector Models (0.3 m)	PVC (oil-resistant)	NO	1: +V, 3: 0 V, 4: Output	E2E-S04N02-CJ-C1 2M	E2E-S04N02-CJ-B1 2M
				NC		E2E-S04N02-CJ-C2 2M	E2E-S04N02-CJ-B2 2M
M5	3 mm	Pre-wired Models (2 m)	PVC (oil-resistant)	NO	Brown: +V Black: Output Blue: 0 V	E2E-S05N03-WC-C1 2M	E2E-S05N03-WC-B1 2M
				NC		E2E-S05N03-WC-C2 2M	E2E-S05N03-WC-B2 2M
		M8 Pre-wired Connector Models (0.3 m)	PVC (oil-resistant)	NO	1: +V, 3: 0 V, 4: Output	E2E-S05N03-CJ-C1 0.3M	E2E-S05N03-CJ-B1 0.3M
				NC		E2E-S05N03-CJ-C2 0.3M	E2E-S05N03-CJ-B2 0.3M
		M8 Connector Models	---	NO		E2E-S05N03-MC-C1	E2E-S05N03-MC-B1
				NC		E2E-S05N03-MC-C2	E2E-S05N03-MC-B2

Accessories (Sold separately)

Mounting Brackets

A Mounting Bracket is not provided with the Sensor. It must be ordered separately as required.

[Refer to *Dimensions* on page 15.]

Appearance	Model	Quantity	Remarks
	Y92E-SC03	1	Mounting block for 3 dia., M3 x P0.5 screws: 2 pieces
	Y92E-SC04	1	Mounting block for 4 dia., M3 x P0.5 screws: 2 pieces
	Y92E-SC06	1	Mounting block for 6 dia., M3 x P0.5 screws: 2 pieces
	Y92E-SS04	1	L-shaped Mounting Bracket for M4 screws
	Y92E-SS05	1	L-shaped Mounting Bracket for M5 screws

Nut Set (Sold separately)

Model	Applicable sensor outer diameter	Set contents
Y92E-NWS04	M4	Clamping nuts: 2 pieces, toothed washer: 1 piece
Y92E-NWS05	M5	

Protective Stainless-steel Spiral Tube against Wire Breakage (Sold separately)

A Spiral Tube is not provided with the Sensor. It must be ordered separately as required.

[Refer to *Dimensions* on page 15.]

Model	Applicable sensor outer diameter	Length
Y92E-STS04-05	M4	0.5 m
Y92E-STS04-10		1 m
Y92E-STS05-05	M5	0.5 m
Y92E-STS05-10		1 m

Sensor I/O Connector (Socket on One Cable End)

A Sensor I/O Connector is not provided with the Sensor. It must be ordered separately as required.

[Refer to *Dimensions* on page 16.]

Size	Cable specifications	Number of cable wires (conductors)	Cable length L (m)	Straight	Right-angle
				Model	
M8	PVC	3	2	XS3F-M8PVC3S2M	XS3F-M8PVC3A2M
			5	XS3F-M8PVC3S5M	XS3F-M8PVC3A5M

Ratings and Specifications


Item	Size Type Model	3 dia.		4 dia.		6.5 dia.		M4		M5		
		Shielded	Unshielded	Shielded	Unshielded	Shielded	Unshielded	Shielded	Unshielded	Shielded	Unshielded	
		E2E-C03SR8□	E2E-C03N02□	E2E-C04S12□	E2E-C04N03□	E2E-C06S02□	E2E-C06N04□	E2E-S04SR8□	E2E-S04N02□	E2E-S05S12□	E2E-S05N03□	
Sensing distance (at 23°C)		0.8 mm ±10%	2 mm ±10%	1.2 mm ±10%	3 mm ±10%	2 mm ±10%	4 mm ±10%	0.8 mm ±10%	2 mm ±10%	1.2 mm ±10%	3 mm ±10%	
Setting distance *1 (Sensing distance × 0.7)		0 to 0.56 mm	0 to 1.4 mm	0 to 0.84 mm	0 to 2.1 mm	0 to 1.4 mm	0 to 2.8 mm	0 to 0.56 mm	0 to 1.4 mm	0 to 0.84 mm	0 to 2.1 mm	
Differential travel		15% max. of sensing distance										
Detectable object		Ferrous metal (The sensing distance decreases with non-ferrous metal. Refer to <i>Engineering Data</i> on page 7.)										
Standard sensing object		Iron, 3 × 3 × 1 mm	Iron, 6 × 6 × 1 mm	Iron, 4 × 4 × 1 mm	Iron, 9 × 9 × 1 mm	Iron, 6.5 × 6.5 × 1 mm	Iron, 12 × 12 × 1 mm	Iron, 3 × 3 × 1 mm	Iron, 6 × 6 × 1 mm	Iron, 4 × 4 × 1 mm	Iron, 9 × 9 × 1 mm	
Response frequency		5 kHz	3.5 kHz	4 kHz	2 kHz	3 kHz	3 kHz	5 kHz	3.5 kHz	4 kHz	2 kHz	
Power supply voltage *2		10 to 30 VDC (including 10% ripple (p-p))										
Current consumption		10 mA max.										
Control output *3	Load current	50 mA max.		100 mA max.		200 mA max. (60 to 70°C: 100 mA)		50 mA max.		100 mA max.		
	Residual voltage	2 V max. *5										
Indicators		Operation indicator: Yellow (complies with European standard EN60947-5-2) Lights during output.										
Operation mode (with sensing object approaching)		B1/B2: PNP open collector, C1/C2: NPN open collector B1/C1 models: NO, B2/C2 models: NC										
Protection circuits		Output reverse polarity protection, Power source circuit reverse polarity protection, Surge suppressor, Load short-circuit protection										
Ambient temperature range		Operation and storage: -25 to 70°C (with no ice or condensation)										
Ambient humidity range		Operation and storage: 35% to 95% (with no condensation)										
Temperature influence		±15% max. of sensing distance at 23°C within temperature range of -25 to 70°C										
Voltage influence		±2.5% max. of sensing distance at rated voltage in the rated voltage ±15% range										
Insulation resistance		50 MΩ min. (at 500 VDC) between current-carrying parts and case										
Dielectric strength		500 VAC, 50/60 Hz for 1 minute between current-carrying parts and case										
Vibration resistance		Destruction: 10 to 55 Hz, 1.5-mm double amplitude for 2 hours each in X, Y, and Z directions										
Shock resistance		Destruction: 500 m/s ² 10 times each in X, Y, and Z directions										
Degree of protection		IEC 60529 IP67, in-house standards: oil-resistant *6										
Connecting method	Pre-wired Models	Yes		Yes		Yes		Yes		Yes		
	M8 Pre-wired Connector Models	Yes		Yes		Yes		Yes		Yes		
	M8 Connector Models	No		Yes		Yes		No		Yes		
Weight (packed state)	Pre-wired Models	Approx. 25 g	Approx. 30 g	Approx. 35 g	Approx. 35 g	Approx. 55 g	Approx. 55 g	Approx. 30 g	Approx. 30 g	Approx. 35 g	Approx. 40 g	
	M8 Pre-wired Connector Models	Approx. 20 g	Approx. 20 g	Approx. 15 g	Approx. 20 g	Approx. 20 g	Approx. 25 g	Approx. 20 g	Approx. 20 g	Approx. 20 g	Approx. 20 g	
	M8 Connector Models	---	---	Approx. 10 g	Approx. 10 g	Approx. 10 g	Approx. 15 g	---	---	Approx. 15 g	Approx. 15 g	
Materials	Case	SUS303 (EN1.4305 *7)										
	Sensing surface	Heat-resistant ABS										
	Clamping nuts *4	No						SUS430 (EN1.4016 *7)				
	Toothed washer *4	No						SUS303 (EN1.4305 *7)				
	Cable	PVC										
Accessories	Instruction manual	Yes										
	Model label	Yes										
	Mounting brackets	Sold separately										

- *1. Operating within the set distance enables high-speed responsiveness and a more stable repeat accuracy.
- *2. When used with a 12 V power source, the Sensor is less susceptible to the effects of internal heat generation. Therefore a more stable repeat accuracy can be obtained.
- *3. When the control output is 20 mA or less, the Sensor is less susceptible to the effects of internal heat generation. Therefore a more stable repeat accuracy can be obtained.
- *4. Nuts: 2 pieces, toothed washer: 1 piece
- *5. 3 dia., M4: load current 50 mA, cable length 2 m
4 dia., M5: load current 100 mA, cable length 2 m
6.5 dia.: load current 200 mA, cord length 2 m
- *6. Oil resistance in-house standard: Performance with respect to water insoluble oil. (Test at right)
- *7. Material name in EN standards.

Oil resistance test

After the test time elapses, the characteristics below are checked for problems.

- (1) Visual appearance (no damage that affects product characteristics)
- (2) Operation check (ON/OFF)
- (3) Insulation resistance (50 MΩ min. at 500 VDC)
- (4) Dielectric strength (500 VAC, 1 min.)
- (5) Water resistance (IP67)




Test oil: Water insoluble oil
Velocite No. 3
50°C × 250 hours
Depth 10 cm

Engineering Data (Reference Value)

Sensing Area


Shielded Models

E2E-C/S□S□

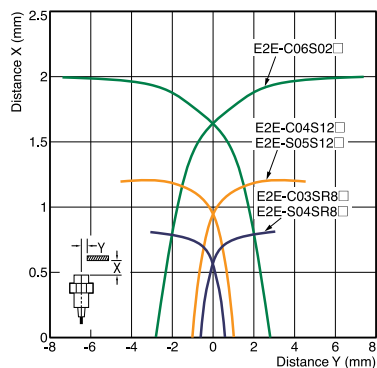

Unshielded Models

E2E-C/S□N□

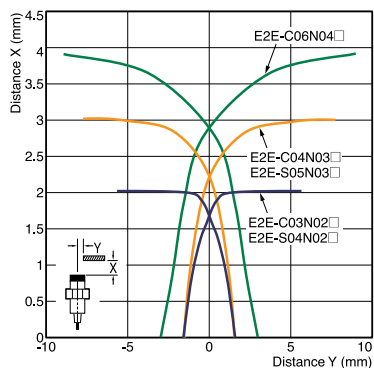


Note: The workpiece is a standard sensing object.
For details, refer to *Ratings and Specifications* on page 6.


Influence of Sensing Object Size and Material

Shielded Models


E2E-C03SR8□/E2E-S04SR8□

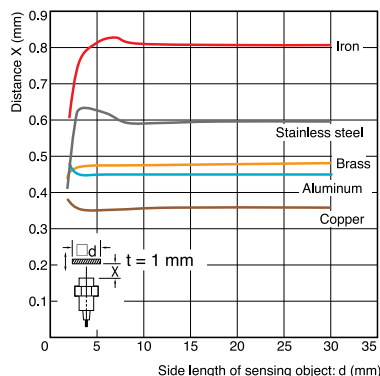

E2E-C04S12□/E2E-S05S12□

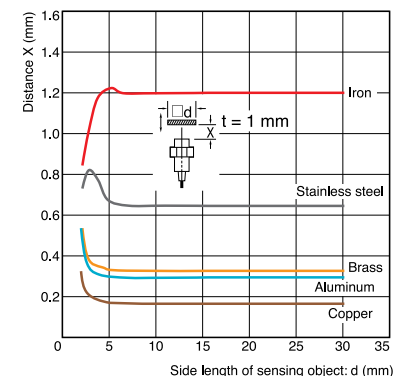


E2E-C06S02□

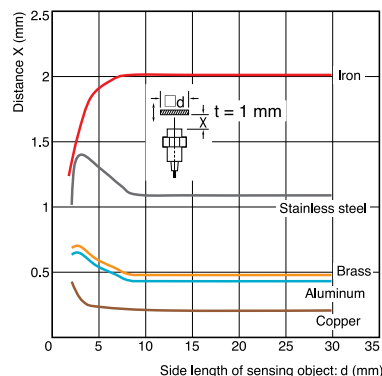


Unshielded Models


E2E-C03N02□/E2E-S04N02□

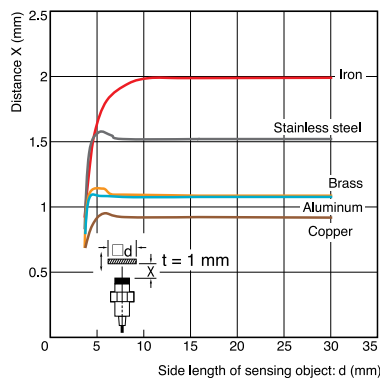

E2E-C04N03□/E2E-S05N03□

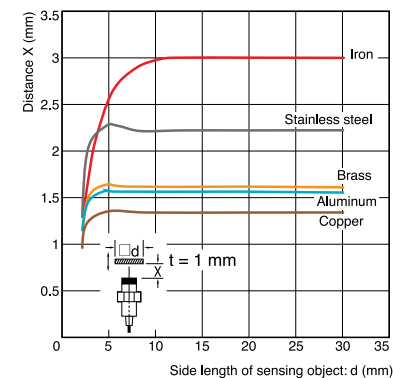


E2E-C06N04□

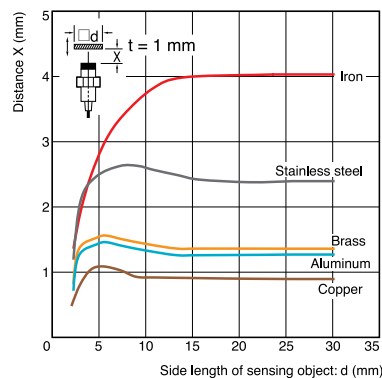


Distance - Horizontal Repeat Accuracy

Shielded Models


E2E-C03SR8□/E2E-S04SR8□

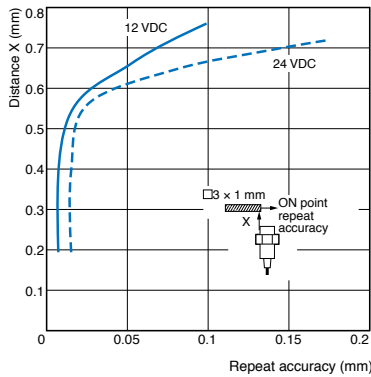

E2E-C04S12□/E2E-S05S12□

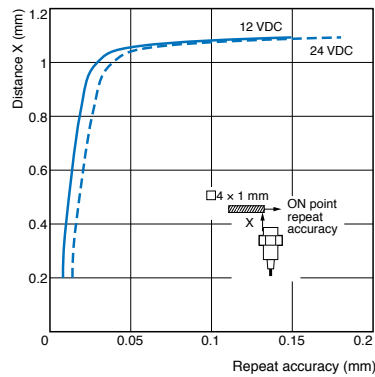


E2E-C06S02□

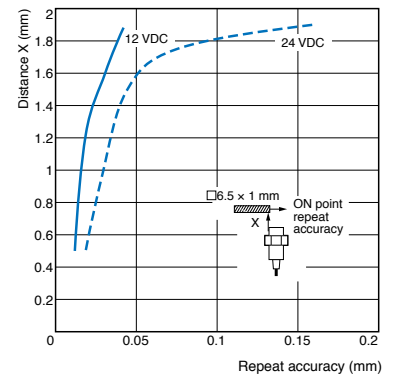


Unshielded Models


E2E-C03N02□/E2E-S04N02□

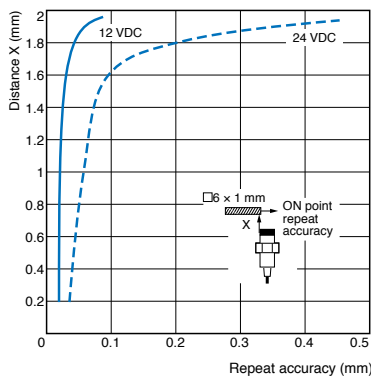

E2E-C04N03□/E2E-S05N03□

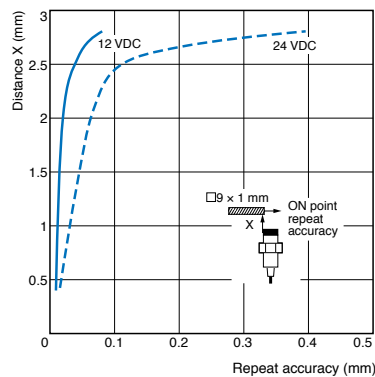

E2E-C06N04□

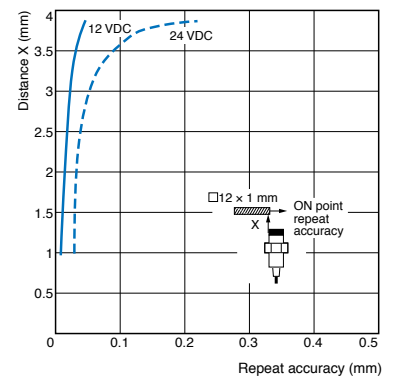

Sensing distance vs. repeat accuracy graphs

By operating within the sensor installation distance, the repeat accuracy stabilizes.


This is reference data based on a standard sensing object, and is not a guarantee of performance.

The repeat accuracy varies depending on the effects of temperature, the material and surface condition of the sensing object, and other conditions.

Minimum measurement gap

Model	Minimum gap (mm)
E2E-C03S/S04S	0.3
E2E-C03N/S04N	0.6
E2E-C04S/S05S	0.4
E2E-C04N/S05N	0.9
E2E-C06S	0.6
E2E-C06N	1.2


Note: Measured at constant temperature of 23°C using an iron sensing object of size at least as large as standard sensing object (see right).

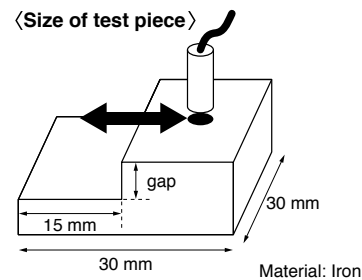

I/O Circuit Diagrams

Operation mode	Output specifications	Model	Timing chart	Output circuit
NO	NPN open-collector output	E2E-□□□□ -□□- C1	<p>Non-sensing area Sensing area Proximity Sensor</p> <p>Sensing object</p> <p>(%) 100 0</p> <p>Rated sensing distance</p> <p>ON Operation indicator (yellow)</p> <p>OFF</p> <p>ON Control output</p> <p>OFF</p>	<p>Proximity Sensor main circuit</p> <p>Proximity Sensor</p> <p>Load</p> <p>10 to 30 VDC</p> <p>Brown ①</p> <p>Black ②</p> <p>Blue ③</p>
		E2E-□□□□ -□□- C2	<p>Non-sensing area Sensing area Proximity Sensor</p> <p>Sensing object</p> <p>(%) 100 0</p> <p>Rated sensing distance</p> <p>ON Operation indicator (yellow)</p> <p>OFF</p> <p>ON Control output</p> <p>OFF</p>	<p>Connector pin arrangement</p> <p>M8</p>
NO	PNP open-collector output	E2E-□□□□ -□□- B1	<p>Non-sensing area Sensing area Proximity Sensor</p> <p>Sensing object</p> <p>(%) 100 0</p> <p>Rated sensing distance</p> <p>ON Operation indicator (yellow)</p> <p>OFF</p> <p>ON Control output</p> <p>OFF</p>	<p>Proximity Sensor main circuit</p> <p>Proximity Sensor</p> <p>Load</p> <p>10 to 30 VDC</p> <p>Brown ①</p> <p>Black ②</p> <p>Blue ③</p>
		E2E-□□□□ -□□- B2	<p>Non-sensing area Sensing area Proximity Sensor</p> <p>Sensing object</p> <p>(%) 100 0</p> <p>Rated sensing distance</p> <p>ON Operation indicator (yellow)</p> <p>OFF</p> <p>ON Control output</p> <p>OFF</p>	<p>Connector pin arrangement</p> <p>M8</p>

Connection to I/O Connector (Connector Models, Pre-wired Connector Models)

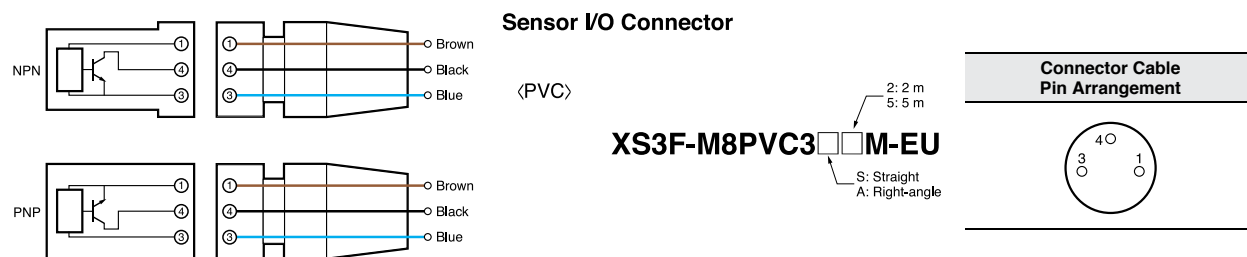

Safety Precautions

Refer to *Warranty and Limitations of Liability*.

WARNING

This product is not designed or rated for ensuring safety of persons either directly or indirectly. Do not use it for such purposes.

CAUTION

- Do not short the load. Explosion or burning may result.
- Do not supply power to the Sensor with no load, otherwise Sensor may be damaged.

Precautions for Correct Use


Do not use this product under ambient conditions that exceed the ratings.

● **Design**

Influence of Surrounding Metal

When mounting the Sensor within a metal panel, ensure that the clearances given in the following table are maintained. Failure to maintain these distances may cause deterioration in the performance of the Sensor.


<Shielded Models>

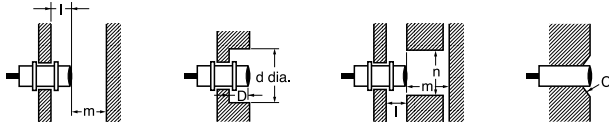

(Unit: mm)

Item	Size	3 dia.	4 dia.	6.5 dia.	M4	M5
L		0	0	0	0	0
m		3	5	6	3	5
d		3	4	6.5	4	5
D		0	0	0	0	0
n		8	10	12	8	10
c		0	0	2	0	0

<Unshielded Models>

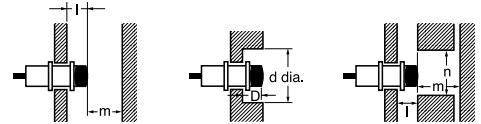


(Unit: mm)

Item	Size	3 dia.	4 dia.	6.5 dia.	M4	M5
L		6	6	12	6	6
m		6	9	8	6	9
d		9	12	24	9	12
D		6	6	12	6	6
n		16	20	24	16	20

If mounted in a surrounding non-magnetic metal such as aluminum or copper, the sensing distance may shorten by about 40 to 50%. If used in a recessed installation, take into consideration the effects of the material on the sensing distance.

Mutual Interference

When installing Sensors face-to-face or side-by-side, ensure that the minimum distances given in the following table are maintained.

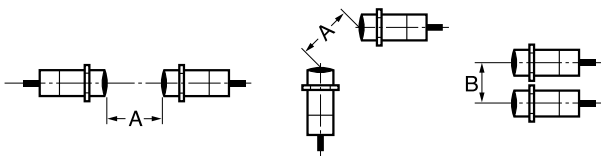

Mutual Interference

(Unit: mm)

Item	Size	3 dia.		4 dia.		6.5 dia.		M4		M5	
		Shielded	Unshielded	Shielded	Unshielded	Shielded	Unshielded	Shielded	Unshielded	Shielded	Unshielded
A		20	80	20	80	20	80	20	80	20	80
B *		15	60	15	60	15	60	15	60	15	60

* Values when the connector size is not taken into consideration.

● Mounting

Tightening Force

〈Mounting threaded models (E2E-S□)〉

Do not tighten the nut with excessive force.
A washer must be used with the nut.




- Note:** 1. Only use the provided nut and toothed washer.
Risk of changes in the sensing distance and damage if a different material is used. If you lose the nut or washer, purchase an optional nut set.
2. The following strengths assume washers are being used.

Item	Size	M4		M5	
		Shielded	Unshielded	Shielded	Unshielded
Tr		0.8 N·m		1 N·m	

Note: Only use the provided nut.

〈Mounting unthreaded cylindrical models (E2E-C□)〉

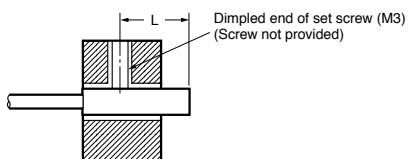

Item	Size	3 dia.		4 dia.		6.5 dia.	
		Shielded	Unshielded	Shielded	Unshielded	Shielded	Unshielded
L *		9 to 21 mm	15 to 27 mm	8 to 21 mm	14 to 27 mm	12 to 26 mm	
Torque		0.2 N·m max.				0.4 N·m max.	

* Excluding the operation indicator area.

When using a set screw, tighten it to the torque indicated in the table above.

● Oil resistance

In accordance with our oil resistance standard, we test oil resistance based on water insoluble oil (complies with test oil based on JIS C0920, Appendix 1).

When water soluble cutting oil is used, durability varies due to the dilution ratio and other factors.

Please test oil resistance using the actual oil that will be used.

● High-speed responsiveness

To obtain a better high-speed response, it is recommended that you use the sensor at about 50% of the possible sensing distance. A high-speed response may not be obtained with some sensing object surfaces, materials, and shapes, or when the sensing distance is greater than the set distance.

For the effects of materials, refer to *Engineering Data* on page 7.

● Repeated cable bending tolerance

If you require repeated bending tolerance, use the Connector Model together with a connector cable that is specified for bending tolerance.

Refer to *Sensor I/O Connector* on page 5.

● Protective Stainless-steel Spiral Tube

The spiral tube is in a fixed state and is intended to provide protection against wire breakage due to shock from tools or other objects.

If you require repeated bending tolerance, use the Connector Model together with a connector cable that is specified for bending tolerance.

Refer to *Sensor I/O Connector* on page 5.

● Block type mounting accessories

Due to differences in dimensional tolerances, these cannot be used with older small diameter proximity sensors. (E2E-CR6, E2E-CR8)


● Bending radius for mounting

If the cable is bent from its base, the resin on the surface of the cable may peel off, however, this will not affect the protective structure or sensing performance.

Avoid bending the cable at less than 10 mm from its base.

When bending the cable, refer to the table below.

Cable diameter	Bending radius
3 dia., M4	7 mm
4 dia., M5	9 mm
6.5 dia.	12 mm



Sensors


Pre-wired Models
(Shielded)

Mounting Hole Dimensions




Dimension	3 dia.	4 dia.	6.5 dia.	M4	M5
F (mm)	3.3 ^{+0.5} ₀	4.2 ^{+0.5} ₀	7 ^{+0.5} ₀	4.5 ^{+0.5} ₀	5.5 ^{+0.5} ₀


E2E-C03SR8-WC-□□




E2E-C04S12-WC-□□

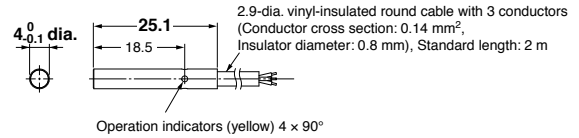


E2E-C06S02-WC-□□

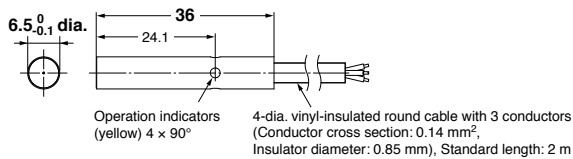

E2E-S04SR8-WC-□□

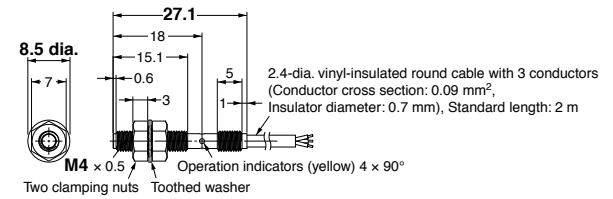


E2E-S05S12-WC-□□

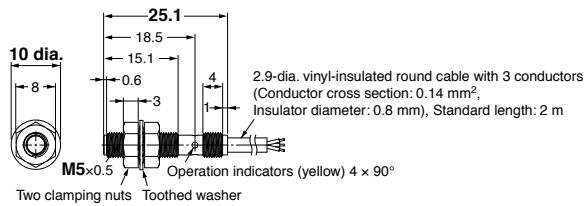


M8 Pre-wired Connector Models (0.3 m) (Shielded)




E2E-C03SR8-CJ-□□

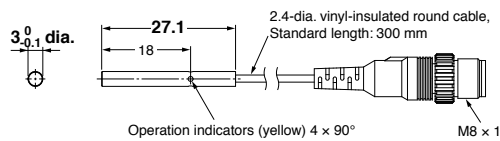


E2E-C04S12-CJ-□□

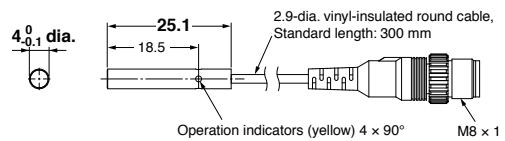


E2E-C06S02-CJ-□□

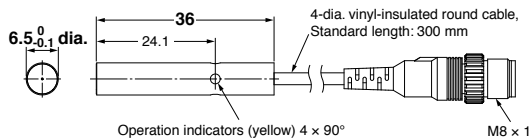

E2E-S04SR8-CJ-□□

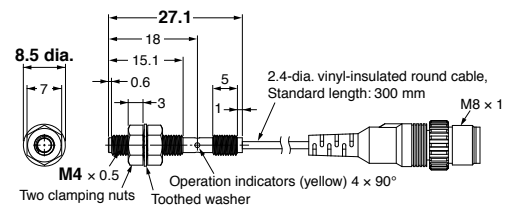


E2E-S05S12-CJ-□□

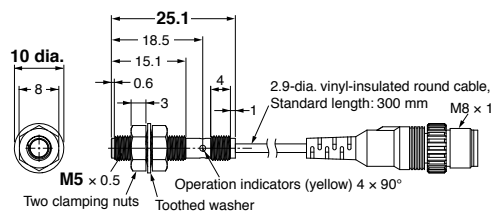


M8 Connector Models (Shielded)




E2E-C04S12-MC-□□

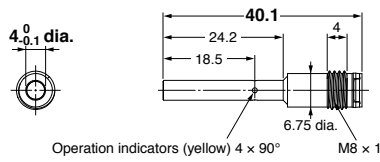

E2E-C06S02-MC-□□

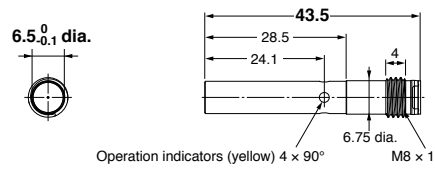

E2E-S05S12-MC-□□

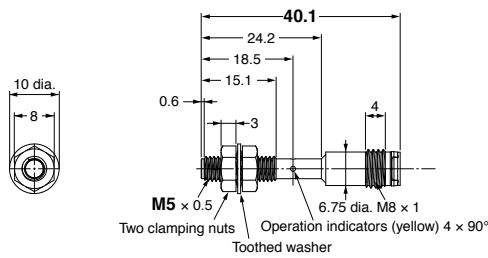


Pre-wired Models (Unshielded)

Mounting Hole Dimensions




Dimension	3 dia.	4 dia.	6.5 dia.	M4	M5
F (mm)	3.3 ^{+0.5} ₀	4.2 ^{+0.5} ₀	7 ^{+0.5} ₀	4.5 ^{+0.5} ₀	5.5 ^{+0.5} ₀


E2E-C03N02-WC-□□

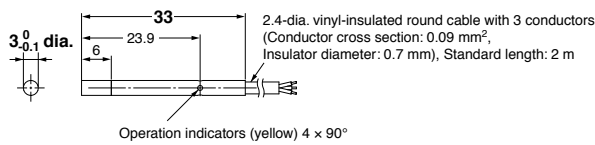


E2E-C04N03-WC-□□

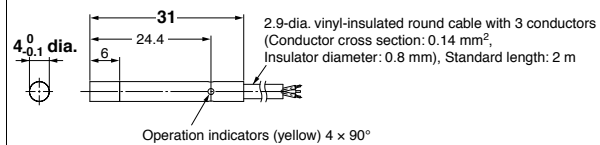


E2E-C06N04-WC-□□

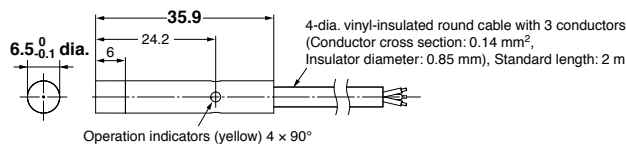

E2E-S04N02-WC-□□

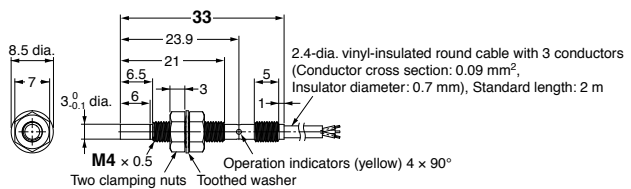


E2E-S05N03-WC-□□

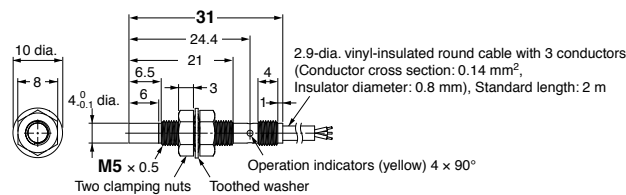


M8 Pre-wired Connector Models (0.3 mm) (Unshielded)




E2E-C03N02-CJ-□□

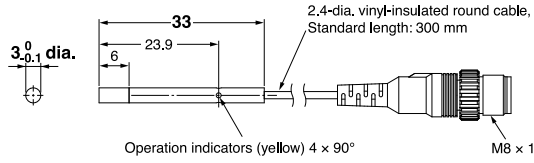


E2E-C04N03-CJ-□□

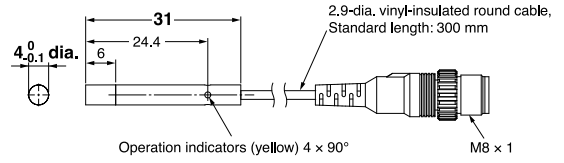


E2E-C06N04-CJ-□□

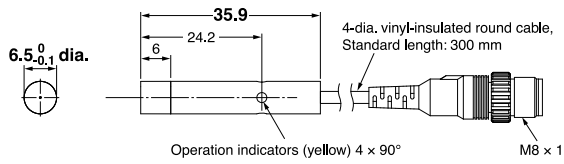

E2E-S04N02-CJ-□□

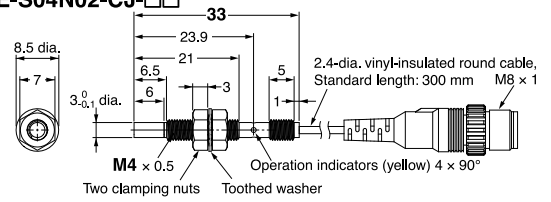


E2E-S05N03-CJ-□□

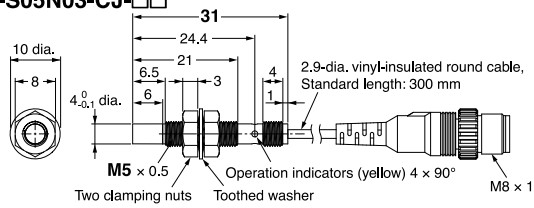


M8 Connector Models (Unshielded)




E2E-C04N03-MC-□□

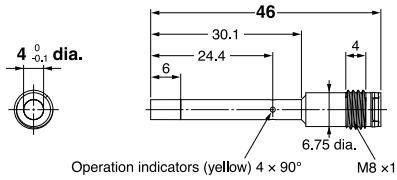

E2E-C06N04-MC-□□

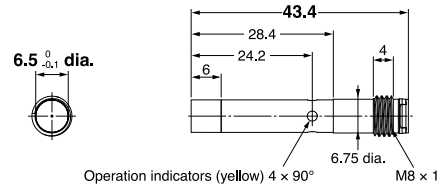

E2E-S05N03-MC-□□

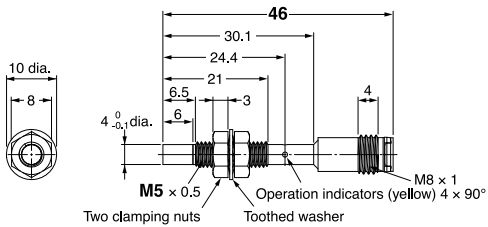

Accessories

Mounting Brackets

Y92E-SC03 (3-dia. block)



Material: Iron

Y92E-SC04 (4-dia. block)



Material: Iron

Y92E-SC06 (6.5-dia. block)




Material: Iron

Y92E-SS04 (for M4 screw)




Material: Iron

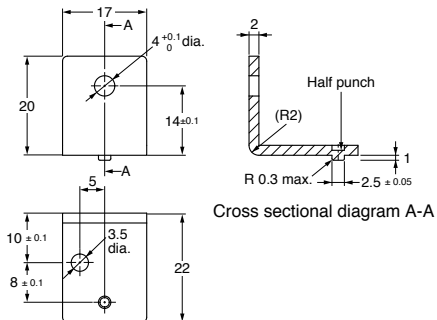

Y92E-SS05 (for M5 screw)




Material: Iron

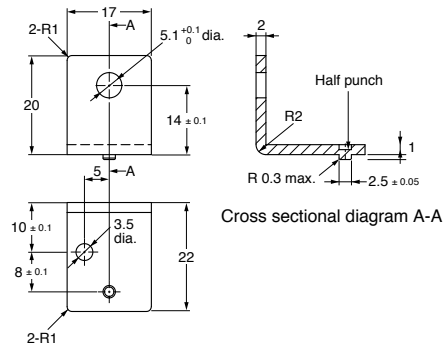


Protective Stainless-steel Spiral Tubes (Sold Separately)

Y92E-STS04-□

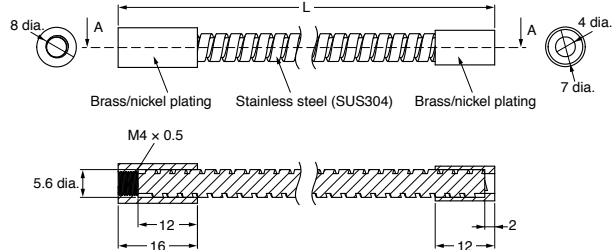

L = 0.5 m (Y92E-STS04-05), 1 m (Y92E-STS04-10)


Y92E-STS05-□

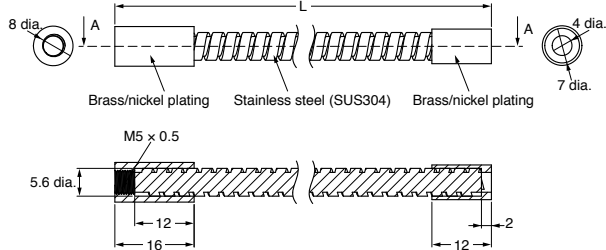


L = 0.5 m (Y92E-STS05-05), 1 m (Y92E-STS05-10)

Sensor I/O Connectors

XS3F-M8PVC3□□M
Straight

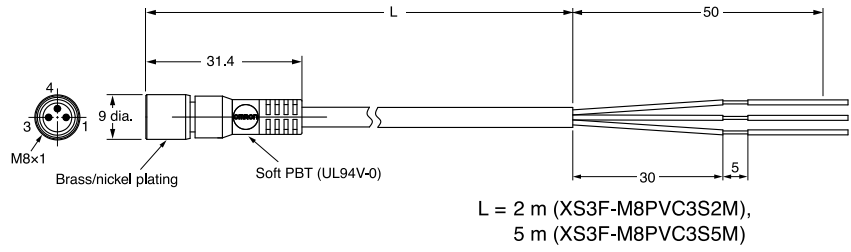

Right-angle

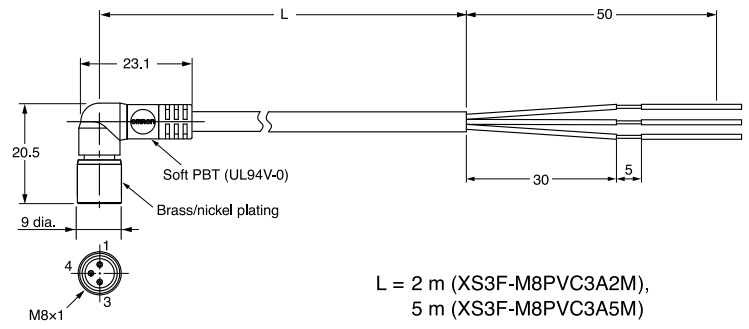

OMRON AUTOMATION AND SAFETY • THE AMERICAS HEADQUARTERS • Schaumburg, IL USA • 847.843.7900 • 800.556.6766 • www.omron247.com

OMRON CANADA, INC. • HEAD OFFICE

Toronto, ON, Canada • 416.286.6465 • 866.986.6766 • www.omron247.com

OMRON ELECTRONICS DE MEXICO • HEAD OFFICE

México DF • 52.55.59.01.43.00 • 001.800.556.6766 • mela@omron.com

OMRON ELECTRONICS DE MEXICO • SALES OFFICE

Apodaca, N.L. • 52.81.11.56.99.20 • 001.800.556.6766 • mela@omron.com

OMRON ELETRÔNICA DO BRASIL LTDA • HEAD OFFICE

São Paulo, SP, Brasil • 55.11.2101.6300 • www.omron.com.br

OMRON ARGENTINA • SALES OFFICE

Cono Sur • 54.11.4783.5300

OMRON CHILE • SALES OFFICE

Santiago • 56.9.9917.3920

OTHER OMRON LATIN AMERICA SALES

54.11.4783.5300

OMRON EUROPE B.V. • Wegalaan 67-69, NL-2132 JD, Hoofddorp, The Netherlands. • Tel: +31 (0) 23 568 13 00 • Fax: +31 (0) 23 568 13 88 • www.industrial.omron.eu

Authorized Distributor:

Automation Control Systems

- Machine Automation Controllers (MAC) • Programmable Controllers (PLC)
- Operator interfaces (HMI) • Distributed I/O • Software

Drives & Motion Controls

- Servo & AC Drives • Motion Controllers & Encoders

Temperature & Process Controllers

- Single and Multi-loop Controllers

Sensors & Vision

- Proximity Sensors • Photoelectric Sensors • Fiber-Optic Sensors
- Amplified Photomicrosensors • Measurement Sensors
- Ultrasonic Sensors • Vision Sensors • RFID/Code Readers

Industrial Components

- Relays • Pushbuttons & Indicators • Limit and Basic Switches • Timers
- Counters • Metering Devices • Power Supplies

Safety

- Laser Scanners • Safety Mats • Edges and Bumpers
- Programmable Safety Controllers • Light Curtains • Safety Relays
- Safety Interlock Switches

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Omron:

[E2E-C04N03-MC-B1](#) [E2E-S04SR8-WC-C2 2M](#) [E2E-S05S12-WC-C1-R 2M](#) [E2E-S04SR8-WC-B2 2M](#) [E2E-C06S02-WC-B1 2M](#) [E2E-S05S12-WC-C2 2M](#) [E2E-S04N02-WC-B1 2M](#) [E2E-C03SR8-WC-C1 2M](#) [E2E-C03N02-WC-B1 2M](#) [E2E-C03N02-WC-C1 2M](#) [E2E-C06N04-WC-C1 2M](#) [E2E-S05N03-WC-C1-R 2M](#) [E2E-S05S12-WC-B2 2M](#) [E2E-S05S12-MC-B2](#) [E2E-C04S12-MC-B1](#) [E2E-S04SR8-WC-C1 2M](#) [E2E-C05S01-WC-C1 2M](#)