

### Features

#### STM8AF and STM8AL common features:


- On-board ST-LINK/V2 included for debugging and programming
- Board power supply: through 5 V USB bus
- Internal dual ST662A step-up converter building the 12 Vdc when powered by USB port
- External application power supply  $V_{BAT}$  (up to 14 Vdc)
- 16 MHz HSE XTAL crystal oscillator
- L99PM62GXP power management IC with LIN and high speed CAN with SPI control interface and high-side drivers
- Two push buttons (USER1 and USER2)
- Extension header for L99PM62GXP including relays, high-side outputs and wake-up capabilities

#### STM8AF dedicated features:

- STM8AF5288T microcontroller featuring 64 Kbytes Flash, 2 Kbytes data EEPROM, LIN, CAN in an 48-pin package
- Seven LEDs:
  - LD1 (red/green) for USB communication
  - LD2 (red) for 5 V power ON
  - Five user LEDs LD3 (red) and LD4 to LD7 (green)
- RV1 potentiometer connected to the ADC peripheral
- Extension headers for MCU connectivity (full Port B, free ports pins, RESET)

#### STM8AL dedicated features:

- STM8AL3L68T microcontroller featuring 32 Kbytes Flash, 1 Kbytes data EEPROM, LCD in an 48-pin package

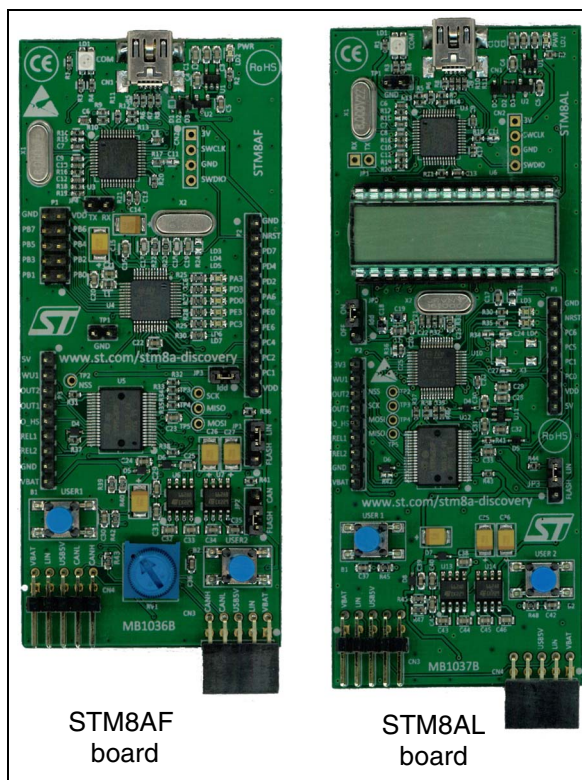

- Four LEDs:
  - LD1 (red/green) for USB communication
  - LD2 (red) for 3.3 V power ON
  - 2 user LEDs LD3 (red) and LD4 (green)
- 4-digit alphanumeric LCD display including 4 bars display
- Extension header for MCU connectivity (free ports pins, RESET)

**Table 1. Device summary**

Order code	Reference
STM8A-DISCOVERY	STM8A discovery kit

## 1 Description

The STM8A-DISCOVERY helps you discover the STM8AF and STM8AL automotive microcontrollers family features and develop your applications through two dedicated application boards that can be connected together via a LIN network.

The STM8AF board can perform both CAN and LIN communications with the MCU powered at 5 V and is ready to be connected into a network with its integrated transceiver. The STM8AL board manages LIN slave communication through its transceiver and uses a 4-digit alphanumeric LCD display with the MCU powered at 3.3 V, offering low energy power modes.

Both STM8AF and STM8AL boards include push buttons, LEDs, external connectors and allow various configurations to take advantage of the numerous capabilities of the microcontrollers.

## 2 System requirements

- Windows PC (XP, Vista, 7)
- USB cable (dual type A to mini-B) - included

## 3 Development toolchains

- IAR: EWSTM8
- STMicroelectronics: STVD

## 4 Demonstration software

The demonstration software is preloaded in the board Flash memory. It uses the trimmer and the USER push buttons placed on the STM8AF board to switch via the LIN bus the LCD and the LEDs of the STM8AL board. The latest versions of the demonstration source code and associated documentation can be downloaded on the ST website.

## 5 Revision history

**Table 2. Document revision history**

Date	Revision	Changes
15-Nov-2012	1	Initial release.

**Please Read Carefully:**

Information in this document is provided solely in connection with ST products. STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, modifications or improvements, to this document, and the products and services described herein at any time, without notice.

All ST products are sold pursuant to ST's terms and conditions of sale.

Purchasers are solely responsible for the choice, selection and use of the ST products and services described herein, and ST assumes no liability whatsoever relating to the choice, selection or use of the ST products and services described herein.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted under this document. If any part of this document refers to any third party products or services it shall not be deemed a license grant by ST for the use of such third party products or services, or any intellectual property contained therein or considered as a warranty covering the use in any manner whatsoever of such third party products or services or any intellectual property contained therein.

**UNLESS OTHERWISE SET FORTH IN ST'S TERMS AND CONDITIONS OF SALE ST DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY WITH RESPECT TO THE USE AND/OR SALE OF ST PRODUCTS INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION), OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.**

**UNLESS EXPRESSLY APPROVED IN WRITING BY TWO AUTHORIZED ST REPRESENTATIVES, ST PRODUCTS ARE NOT RECOMMENDED, AUTHORIZED OR WARRANTED FOR USE IN MILITARY, AIR CRAFT, SPACE, LIFE SAVING, OR LIFE SUSTAINING APPLICATIONS, NOR IN PRODUCTS OR SYSTEMS WHERE FAILURE OR MALFUNCTION MAY RESULT IN PERSONAL INJURY, DEATH, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE. ST PRODUCTS WHICH ARE NOT SPECIFIED AS "AUTOMOTIVE GRADE" MAY ONLY BE USED IN AUTOMOTIVE APPLICATIONS AT USER'S OWN RISK.**

Resale of ST products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by ST for the ST product or service described herein and shall not create or extend in any manner whatsoever, any liability of ST.

ST and the ST logo are trademarks or registered trademarks of ST in various countries.

Information in this document supersedes and replaces all information previously supplied.

The ST logo is a registered trademark of STMicroelectronics. All other names are the property of their respective owners.

© 2012 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Philippines - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

[www.st.com](http://www.st.com)

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[STMicroelectronics:](#)

[STM8A-DISCOVERY](#)