Broadband CATV, 18 dB Coupler 5 - 1200 MHz

Features

- Surface Mount
- Typical Coupling +18 dB
- 260°C Reflow Compatible
- Available on Tape and Reel,
- RoHS Compliant and Pb Free

Description

The MACP-007727-Cl07B0 is an 18 dB broadband coupler in a low cost, surface mount package. It offers low loss, good isolation, good input/output matching and exceptional matching in return loss. Ideally suited for high volume CATV/Broadband applications.




Ordering Information^{1,2}


Part Number	Package		
MACP-007727-CI07B0	1000 piece reel		
MACP-007727-CT30TB	Test Board		

1. Reference Application Note M513 for reel size information.

2. All sample boards include x loose parts.

Functional Schematic

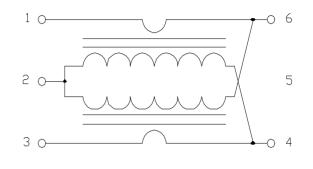

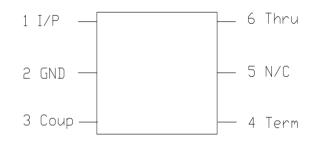

Pin Configuration

Pin No.	Function	
1	Input	
2	Ground	
3	Coupled	
4	Isolated (external 75 Ω termination)	
5	No Connection	

MACOM Technology Solutions Inc. (MACOM) and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice. Visit <u>www.macom.com</u> for additional data sheets and product information.



Rev. V2



Broadband CATV, 18 dB Coupler 5 - 1200 MHz

Rev. V2

Electrical Specifications: $T_A = +25^{\circ}C$, $Z_0 = 75 \Omega$

Parameter	Test Conditions	Units	Min.	Тур.	Max.
Coupling	5 - 40 MHz 40 - 1000 MHz 1000 - 1200MHz	dB		18.2 18.2 18.7	18.3 20.0 22.0
Main Line Loss	5 - 1000 MHz 1000 - 1200 MHz	dB	_	1.00 1.40	1.25 1.8
Input Return Loss	5 - 40 MHz 40 - 1000 MHz 1000 - 1200 MHz	dB	25.0 23.0 19.0	27.3 31.9 23.4	_
Output Return Loss	5 - 40 MHz 40 - 1000 MHz 1000 - 1200 MHz	dB	25.0 230 19.0	29.20 27.10 21.24	_
Isolation	5 - 1000 MHz 1000 - 1200 MHz	dB	23.0 20.0	28.90 26.25	
Coupling Return Loss	5 - 1000 MHz 1000 - 1200 MHz	dB	15.0 10.0	21.15 16.70	


Absolute Maximum Ratings^{3,4}

Parameter	Absolute Maximum		
Input Power	250 mW		
DC current	30 mA		
Operating Temperature	-40°C to +85°C		
Storage Temperature	ure -55°C to +100°C		

3. Exceeding any one or combination of these limits may cause permanent damage to this device.

 MACOM does not recommend sustained operation near these survivability limits.

Recommended PCB Configuration

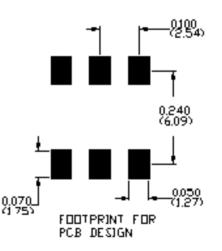



2

MACOM Technology Solutions Inc. (MACOM) and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice. Visit <u>www.macom.com</u> for additional data sheets and product information.

Broadband CATV, 18 dB Coupler 5 - 1200 MHz

Typical Performance Curves $T_A = 25^{\circ}C$, $Z_0 = 75 \Omega$

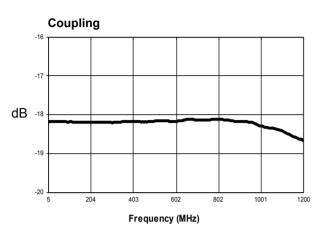

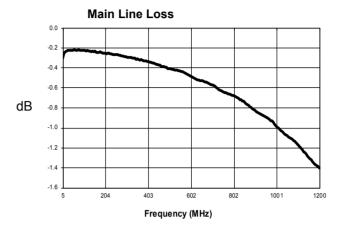

Output Return Loss

0

-10

-20

-40

-50

-60

5

204

403

602


Frequency (MHz)


802


1001

1200

dB -30



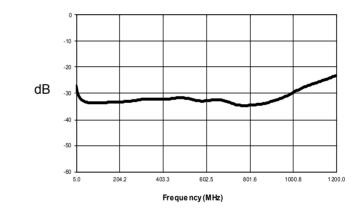

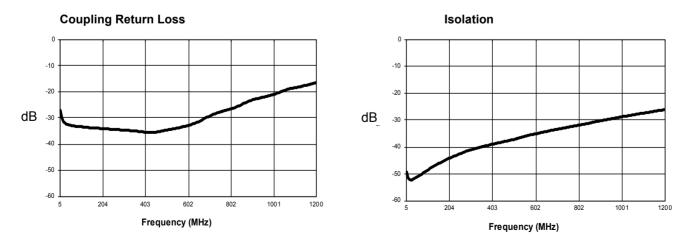

3

MACOM Technology Solutions Inc. (MACOM) and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice. Visit <u>www.macom.com</u> for additional data sheets and product information.

For further information and support please visit: <u>https://www.macom.com/support</u>



Rev. V2

Broadband CATV, 18 dB Coupler 5 - 1200 MHz



Rev. V2

MACOM Technology Solutions Inc. All rights reserved.

Information in this document is provided in connection with MACOM Technology Solutions Inc ("MACOM") products. These materials are provided by MACOM as a service to its customers and may be used for informational purposes only. Except as provided in MACOM's Terms and Conditions of Sale for such products or in any separate agreement related to this document, MACOM assumes no liability whatsoever. MACOM assumes no responsibility for errors or omissions in these materials. MACOM may make changes to specifications and product descriptions at any time, without notice. MACOM makes no commitment to update the information and shall have no responsibility whatsoever for conflicts or incompatibilities arising from future changes to its specifications and product descriptions. No license, express or implied, by estoppels or otherwise, to any intellectual property rights is granted by this document.

THESE MATERIALS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, RELATING TO SALE AND/OR USE OF MACOM PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, CONSEQUENTIAL OR INCIDENTAL DAMAGES, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT. MACOM FURTHER DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. MACOM SHALL NOT BE LIABLE FOR ANY SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS, WHICH MAY RESULT FROM THE USE OF THESE MATERIALS.

MACOM products are not intended for use in medical, lifesaving or life sustaining applications. MACOM customers using or selling MACOM products for use in such applications do so at their own risk and agree to fully indemnify MACOM for any damages resulting from such improper use or sale.

⁴

MACOM Technology Solutions Inc. (MACOM) and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice. Visit <u>www.macom.com</u> for additional data sheets and product information.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

MACOM: MACP-007727-CI07B0