
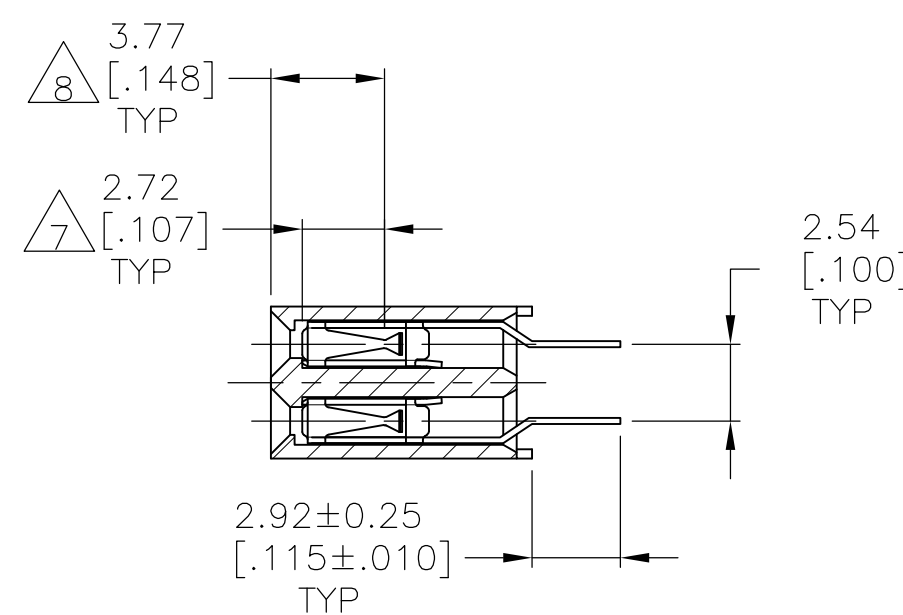




- 1 HOUSING: FLAME RETARDANT, GLASS FILLED, POLYESTER, COLOR: BLACK.
CONTACT: PHOSPHOR BRONZE
- 2 CONTACT: DUPLEX PLATED $0.25\mu\text{m} [.000010]$ MIN GOLD IN CONTACT
AREA, $3.81-7.62\mu\text{m} [.000150-.000300]$ BRIGHT TIN-LEAD ON LEADS
ALL OVER $1.27\mu\text{m} [.000050]$ MINIMUM NICKEL.
- 3 THESE DIMENSIONS PERTAIN TO CAVITY CENTERLINES ONLY – NOT TO
CONTACT LOCATIONS
- 4 MARK PART NUMBER AND DATE CODE IN APPROXIMATE LOCATION SHOWN,
EITHER SIDE.
- 5 TOLERANCE IS NON-CUMULATIVE.
- 6 2 POSITION DATE CODE IS MARKED OPPOSITE SIDE OF TE LOGO.
- 7 POINT-OF-MEASUREMENT DIMENSION FOR PLATING
THICKNESS (INSIDE CONTACT BEAM).
- 8 POINT-OF-CONTACT DIMENSION.
- 9 NO PART NUMBER MARKING REQUIRED FOR THIS PART.
- 10 TE LOGO AND CSA LOGO ARE MOLDED INTO HOUSING.
- 11 CONTACT: DUPLEX PLATED $0.25\mu\text{m} [.000010]$ MIN GOLD IN CONTACT
AREA, $3.81-7.62\mu\text{m} [.000150-.000300]$ MATTE TIN ON LEADS
ALL OVER $1.27\mu\text{m} [.000050]$ MINIMUM NICKEL
- 12 ROHS 2002/95/EC COMPLIANT



THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN M.BINNER 06NOV2002		 TE Connectivity	
		CHK J.OLSON 06NOV02			
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME RECEPTACLE ASSEMBLY, MOD IV, DOUBLE ROW, TOP ENTRY, .100X.100CL, VERTICAL MOUNT, AMPMODU	
		APVD J.OLSON 06NOV02 PRODUCT SPEC 108-25022			
0 PLC ± - 1 PLC ± - 2 PLC ± 0.13[.005] 3 PLC ± - 4 PLC ± - ANGLES ± -		APPLICATION SPEC 114-25018			
MATERIAL 		FINISH 			
		WEIGHT -		SIZE A2	
				CAGE CODE 00779	
				DRAWING NO C-147424	
				RESTRICTED TO -	
CUSTOMER DRAWING				SCALE	4:1
				SHEET	1 OF 2
				REV	E7

THIS DRAWING IS UNPUBLISHED.	RELEASED FOR PUBLICATION	- , -
© COPYRIGHT - By -	ALL RIGHTS RESERVED.	

LOC	DIST	REVISIONS					
AD	00	P	LTR	DESCRIPTION	DATE	OWN	APVD
			—	SEE SHEET 1	—	—	—

SUPERSEDED BY 7-147424-4	2	99.06	[3.900]	101.60	[4.000]	80	4-147424-0
	2	96.52	[3.800]	99.06	[3.900]	78	3-147424-9
	2	93.98	[3.700]	96.52	[3.800]	76	3-147424-8
	2	91.44	[3.600]	93.98	[3.700]	74	3-147424-7
	2	88.90	[3.500]	91.44	[3.600]	72	3-147424-6
	2	86.36	[3.400]	88.90	[3.500]	70	3-147424-5
	2	83.82	[3.300]	86.36	[3.400]	68	3-147424-4
	2	81.28	[3.200]	83.82	[3.300]	66	3-147424-3
	2	78.74	[3.100]	81.28	[3.200]	64	3-147424-2
	2	76.20	[3.000]	78.74	[3.100]	62	3-147424-1
	2	73.66	[2.900]	76.20	[3.000]	60	3-147424-0
	2	71.12	[2.800]	73.66	[2.900]	58	2-147424-9
	2	68.58	[2.700]	71.12	[2.800]	56	2-147424-8
	2	66.04	[2.600]	68.58	[2.700]	54	2-147424-7
	2	63.50	[2.500]	66.04	[2.600]	52	2-147424-6
	SUPERSEDED BY 7-147424-4	2	60.96	[2.400]	63.50	[2.500]	50
2		58.42	[2.300]	60.96	[2.400]	48	2-147424-4
SUPERSEDED BY 7-147424-0	2	55.88	[2.200]	58.42	[2.300]	46	2-147424-3
	2	53.34	[2.100]	55.88	[2.200]	44	2-147424-2
SUPERSEDED BY 7-147424-0	2	50.80	[2.000]	53.34	[2.100]	42	2-147424-1
	2	48.26	[1.900]	50.80	[2.000]	40	2-147424-0
SUPERSEDED BY 6-147424-6	2	45.72	[1.800]	48.26	[1.900]	38	1-147424-9
	2	43.18	[1.700]	45.72	[1.800]	36	1-147424-8
	2	40.64	[1.600]	43.18	[1.700]	34	1-147424-7
	2	38.10	[1.500]	40.64	[1.600]	32	1-147424-6
SUPERSEDED BY 6-147424-5	2	35.56	[1.400]	38.10	[1.500]	30	1-147424-5
SUPERSEDED BY 6-147424-0	2	33.02	[1.300]	35.56	[1.400]	28	1-147424-4
	2	30.48	[1.200]	33.02	[1.300]	26	1-147424-3
	2	27.94	[1.100]	30.48	[1.200]	24	1-147424-2
	2	25.40	[1.000]	27.94	[1.100]	22	1-147424-1
SUPERSEDED BY 6-147424-0	2	22.86	[.900]	25.40	[1.000]	20	1-147424-0
	2	20.32	[.800]	22.86	[.900]	18	147424-9
SUPERSEDED BY 6-147424-0	2	17.78	[.700]	20.32	[.800]	16	147424-8
	2	15.24	[.600]	17.78	[.700]	14	147424-7
	2	12.70	[.500]	15.24	[.600]	12	147424-6
	2	10.16	[.400]	12.70	[.500]	10	147424-5
SUPERSEDED BY 6-147424-0	9 2	7.62	[.300]	10.16	[.400]	8	147424-4
	9 2	5.08	[.200]	7.62	[.300]	6	147424-3
	9 2	2.54	[.100]	5.08	[.200]	4	147424-2
	9 2			2.54	[.100]	2	6 147424-1
9 OBSOLETE							
	FINISH	B	A	NO OF POSN	PART NUMBER		

		99.06[3.900]	101.06[4.000]	80		9-147424-0
		96.52[3.800]	99.06[3.900]	78		8-147424-9
		93.98[3.700]	96.52[3.800]	76		8-147424-8
		91.44[3.600]	93.98[3.700]	74		8-147424-7
		88.90[3.500]	91.44[3.600]	72		8-147424-6
		86.36[3.400]	88.90[3.500]	70		8-147424-5
		83.82[3.300]	86.36[3.400]	68		8-147424-4
		81.28[3.200]	83.82[3.300]	66		8-147424-3
		78.74[3.100]	81.28[3.200]	64		8-147424-2
		76.20[3.000]	78.74[3.100]	62		8-147424-1
		73.66[2.900]	76.20[3.000]	60		8-147424-0
		71.12[2.800]	73.66[2.900]	58		7-147424-9
		68.58[2.700]	71.12[2.800]	56		7-147424-8
		66.04[2.600]	68.58[2.700]	54		7-147424-7
		63.50[2.500]	66.04[2.600]	52		7-147424-6
		60.96[2.400]	63.50[2.500]	50		7-147424-5
		58.42[2.300]	60.96[2.400]	48		7-147424-4
		55.88[2.200]	58.42[2.300]	46		7-147424-3
		53.34[2.100]	55.88[2.200]	44		7-147424-2
		50.80[2.000]	53.34[2.100]	42		7-147424-1
		48.26[1.900]	50.80[2.000]	40		7-147424-0
		45.72[1.800]	48.26[1.900]	38		6-147424-9
		43.18[1.700]	45.72[1.800]	36		6-147424-8
		40.64[1.600]	43.18[1.700]	34		6-147424-7
		38.10[1.500]	40.64[1.600]	32		6-147424-6
		35.56[1.400]	38.10[1.500]	30		6-147424-5
		33.02[1.300]	35.56[1.400]	28		6-147424-4
		30.48[1.200]	33.02[1.300]	26		6-147424-3
		27.94[1.100]	30.48[1.200]	24		6-147424-2
		25.40[1.000]	27.94[1.100]	22		6-147424-1
		22.86[.900]	25.40[1.000]	20		6-147424-0
		20.32[.800]	22.86[.900]	18		5-147424-9
		17.78[.700]	20.32[.800]	16		5-147424-8
		15.24[.600]	17.78[.700]	14		5-147424-7
		12.70[.500]	15.24[.600]	12		5-147424-6
		10.16[.400]	12.70[.500]	10		5-147424-5
		7.62[.300]	10.16[.400]	8		5-147424-4
		5.08[.200]	7.62[.300]	6		5-147424-3
		2.54[.100]	5.08[.200]	4		5-147424-2
 OBSOLETE		—	2.54[.100]	2	 	5-147424-1
	FINISH	B	A	NO OF POSN		PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN M.BINNER 06NOV2002 CHK J.OLSON 06NOV02 APVD J.OLSON 06NOV02		 TE Connectivity	
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± 0.13[.005] 3 PLC ± - 4 PLC ± - ANGLES ± -		NAME RECEPTACLE ASSEMBLY, MOD IV, DOUBLE ROW, TOP ENTRY, .100X.100CL, VERTICAL MOUNT, AMPMODU	
		PRODUCT SPEC 108-25022 APPLICATION SPEC 114-25018		SIZE A2	
MATERIAL 		FINISH 		CAGE CODE 00779	
		WEIGHT -		DRAWING NO C-147424	
CUSTOMER DRAWING				SCALE 1:1 SHEET 2 of 2 REV FZ	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[147424-3](#)