

NOTE:
 UNIT IS SUPPLIED WITH A 3.75 [95.2] DIA. 0-100 GRADUATED DIAL PLATE FOR PANEL MOUNTING.

| SPECIFICATIONS | | | | | | | | | | | |
|-----------------------------|-------|-------|--------|------------------------------------|-------------------------------------|-----------|------------------------------------|----------------------|--|--------|-------|
| WIRING | INPUT | | OUTPUT | | | | SHAFT ROTATION TO INCREASE VOLTAGE | TERMINAL CONNECTIONS | | | |
| | VOLTS | HERTZ | VOLTS | CONSTANT CURRENT LOAD MAX. AMPS | CONSTANT IMPEDANCE LOAD MAX. KVA | MAX. AMPS | | MAX. KVA | MOTOR DRIVEN UNITS USE CCW FOR INCREASING VOLTAGE AS VIEWED FROM BASE END ■ | | |
| | | | | | | | | INPUT | JUMPER | OUTPUT | |
| SINGLE PHASE SERIES | 480 | 50/60 | 0-480 | 9.5 | 4.56 | 12 | 5.76 | CW | 2-2 | 4-4 | 3-3 |
| | | | 0-560 | 9.5 | 5.32 | — | — | CCW | 4-4 | 2-2 | 3-3 |
| | 240 | 50/60 | 0-560 | 9.5# | 2.28 § | — | — | CW | 1-1 | 4-4 | 3-3 |
| | | | 0-280 | 9.5 | 4.61 | — | — | CCW | 5-5 | 2-2 | 3-3 |
| THREE PHASE OPEN DELTA ∏ | 240 | 50/60 | 0-240 | 9.5 | 3.95 | 12 | 5.0 | CW | 2-4-2 | 4-4 | 3-4-3 |
| | | | 0-280 | 9.5 | 4.61 | — | — | CCW | 4-2-4 | 2-2 | 3-2-3 |
| | 120 | 50/60 | 0-280 | 9.5# | 1.98 § | — | — | CW | 1-4-1 | 4-4 | 3-4-3 |
| | | | 0-280 | 9.5# | 1.98 § | — | — | CCW | 5-2-5 | 2-2 | 3-2-3 |
| | | | | | | | | | | | |

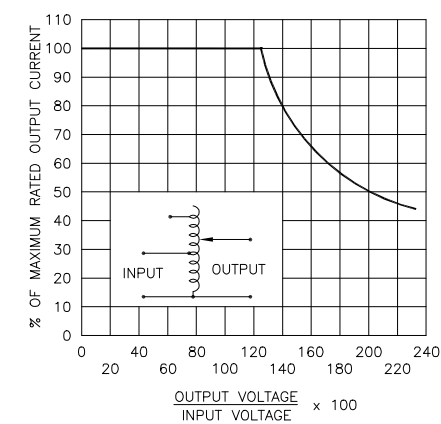


FIGURE A
 MAXIMUM OUTPUT CURRENT OF ANY DUAL INPUT VOLTAGE OR VOLTAGE DOUBLER UNIT OPERATED AT LOWER INPUT VOLTAGE.


MAXIMUM OUTPUT CURRENT IN OUTPUT VOLTAGE RANGE FROM 0 TO 25% ABOVE LINE VOLTAGE. AT HIGHER OUTPUT VOLTAGES, THE OUTPUT CURRENT MUST BE REDUCED ACCORDING TO THE DERATING CURVE FIGURE A.

§ MAXIMUM KVA AT MAXIMUM OUTPUT VOLTAGE AND CORRESPONDING DERATED OUTPUT CURRENT. MAXIMUM KVA FOR LOWER VOLTAGES MAY BE CALCULATED FROM DERATING CURVE FIGURE A.

++ LINE TO LINE VOLTAGE.

∏ IF GANGED UNITS ARE USED IN A SYSTEM THAT ORDINARILY HAS A COMMON NEUTRAL OR GROUND BETWEEN SOURCE AND LOAD, THE NEUTRAL OR GROUND MUST BE CONNECTED TO THE COMMON TERMINALS OF THE VARIABLE TRANSFORMER ASSEMBLY. IF THE SYSTEM HAS NO NEUTRAL, THE LOAD MUST BE BALANCED OR THE TRANSFORMER WILL BE DAMAGED.

■ JUMPER PROVIDED IN STANDARD COMMON POSITION AND SHOULD BE MOVED OR REMOVED AS REQUIRED.

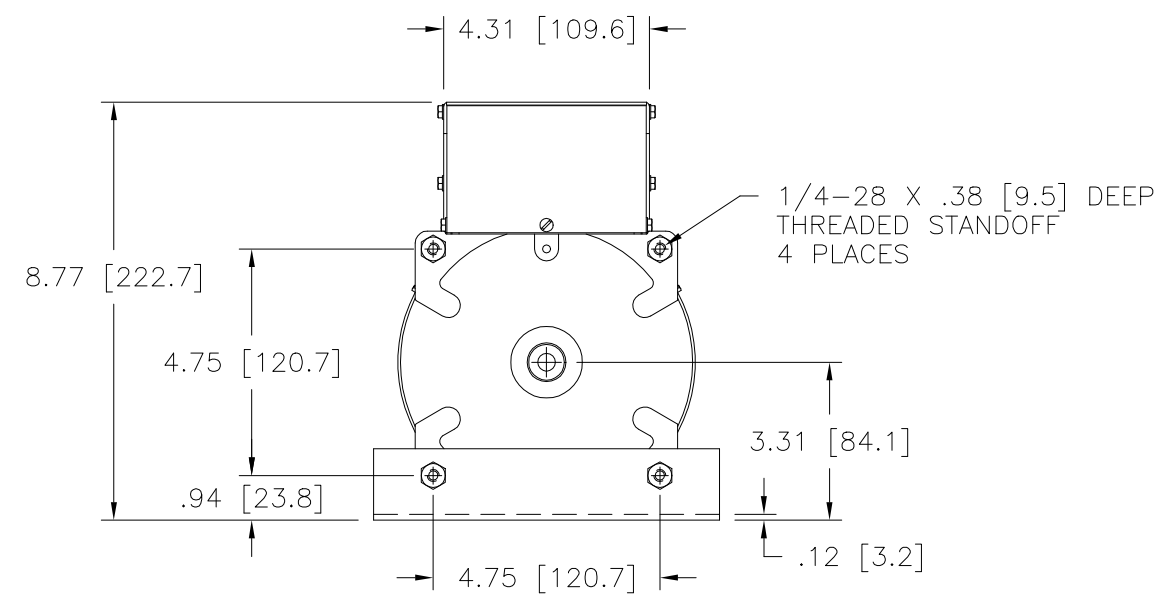

UNLESS OTHERWISE SPECIFIED, TOLERANCE IS # DECIMALS .06 HOLES .01 ANGLES 1° DRAFT 1-1/2°

MATERIAL: ALL DIMENSIONS APPLY AFTER PLATING

UNITS: IN [mm]

TITLE: SPEC. CONTROL DRAWING VARIABLE TRANSFORMER MODEL: 1520CT-2

STACO ENERGY PRODUCTS CO. A COMPONENTS CORPORATION OF AMERICA COMPANY DAYTON, OHIO U.S.A.

| | | | | | |
|---------------------|--------------|--------------------------|-----------------------|-------------------|------|
| DRAWN BY S.A. SMITH | DATE 2/11/99 | FIRST USED ON 1520CT-2 | DO NOT SCALE DWG. | CUSTOMER APPROVAL | DATE |
| CHECKER | DATE | WEIGHT APPROX. 42.25 LBS | CODE IDENT. NO. 83008 | DWG. NO. 031-3963 | |
| ENGINEER | DATE | SCALE .50=1 | SHEET 1 OF 1 | | |

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Staco:](#)

[1520CT-2](#)