

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

.19

BY AMP INCORPORATED. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS				
CM	53	P	LTR	DESCRIPTION	DATE	APVD
		R		REVISED PER EC 0G3B-0151-99	10-APR-00	KW SR

D

C

B




A

D

C

B

A

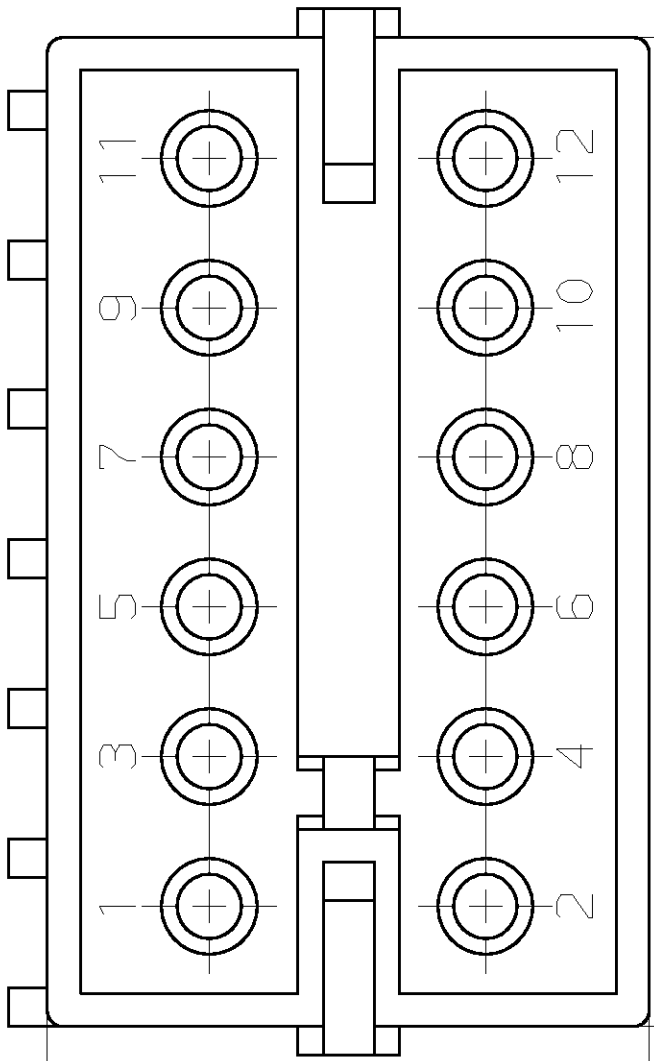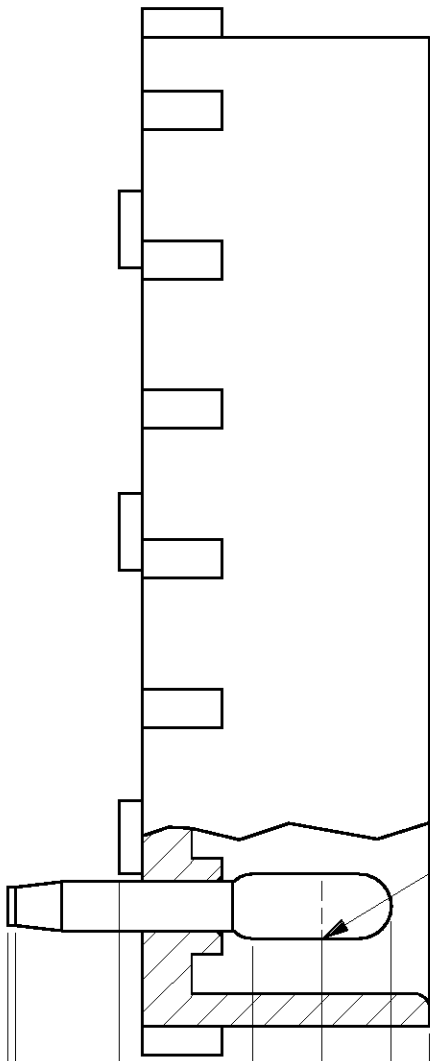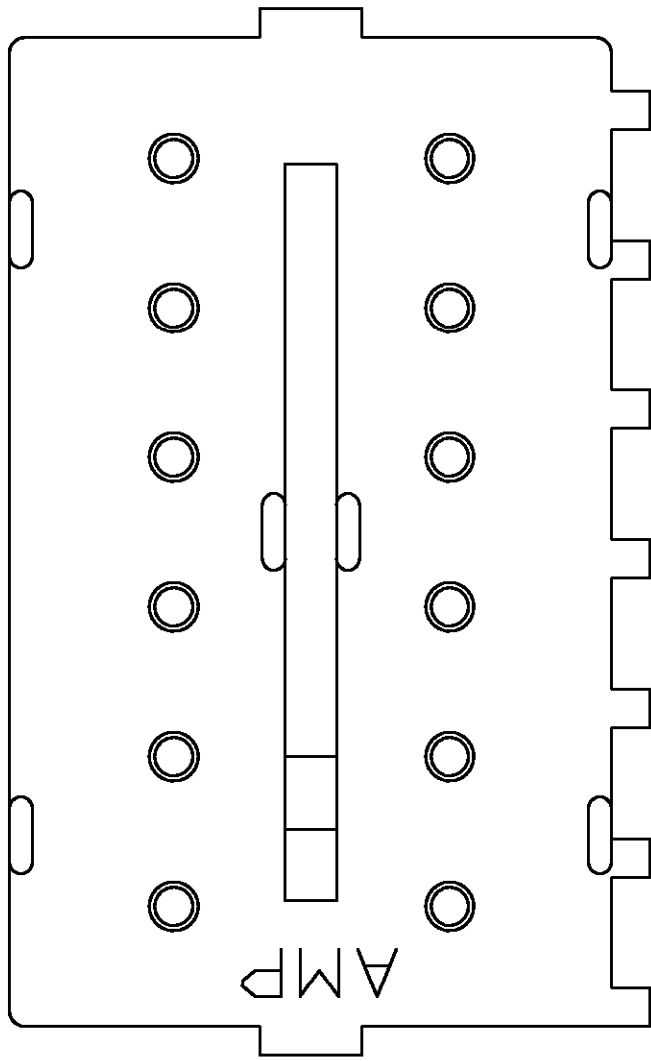

32.77

1. PARTS COMPLY WITH AMP SOLDERABILITY SPEC 109-11-2.
2. CONTACT IS PLATED OVERALL WITH 0.00127 NICKEL, THEN 0.00076 GOLD OVER LENGTH INDICATED AND MATTE TIN ON SOLDER TAIL END.

0.25 MAX
CUTOFF TAB

2.29

0.76


4.57

4.57
3.81

9.53

19.94

POINT OF
MEASUREMENT

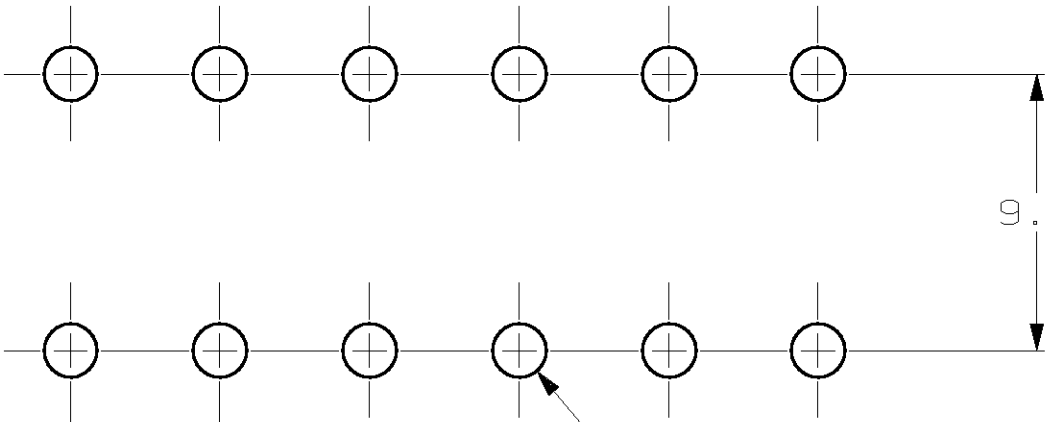

4.95
TYP
NON-ACCUM

ø 1.78±0.08
TYP

RECOMMENDED MOUNTING HOLE PATTERN
FOR .062 THICK P.C. BOARD

METRIC

2.29	.090	-	-
1.78	.070	32.77	1.290
0.76	.030	19.94	.785
0.25	.010	9.53	.375
0.13	.005	9.14	.360
0.08	.003	4.95	.195
0.00127	.000050	4.57	.180
0.00076	.000030	3.81	.150
MM	IN	MM	IN
CONVERSION TABLE			

AMP 1471-9 REV 11 JUN97

CU ALLOY				NYLON, UL94V-0	NATURAL	350213-2							
CU ALLOY		PRE-TIN		NYLON, UL94V-0	NATURAL	350213-1							
MATERIAL		FINISH		MATERIAL		COLOR	PART NO						
PIN				HOUSING									
THIS DRAWING IS A CONTROLLED DOCUMENT.													
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±- 1 PLC ±- 2 PLC ±0.13 3 PLC ±- 4 PLC ±- ANGLES ±-		DWN10-APR-2000 CHKK. WHITAKER S. RIDGILL10-APR-2000 APVD10-APR-2000 S. RIDGILL PRODUCT SPEC — APPLICATION SPEC — WEIGHT —				AMP Incorporated Harrisburg, PA 17105-3608 NAME HEADER ASSEMBLY, 12 CIRCUIT, COMMERCIAL MATE-N-LOK™					
				MATERIAL		SEE TABLE		FINISH		SEE TABLE			
				CUSTOMER DRAWING				SCALE4:1		SHEET1 OF 1		REV R	

350213

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[350213-2](#)