

3

2



1

-7; AS SHOWN  
-7; 本図

NUMBER  
C-178421



METRIC

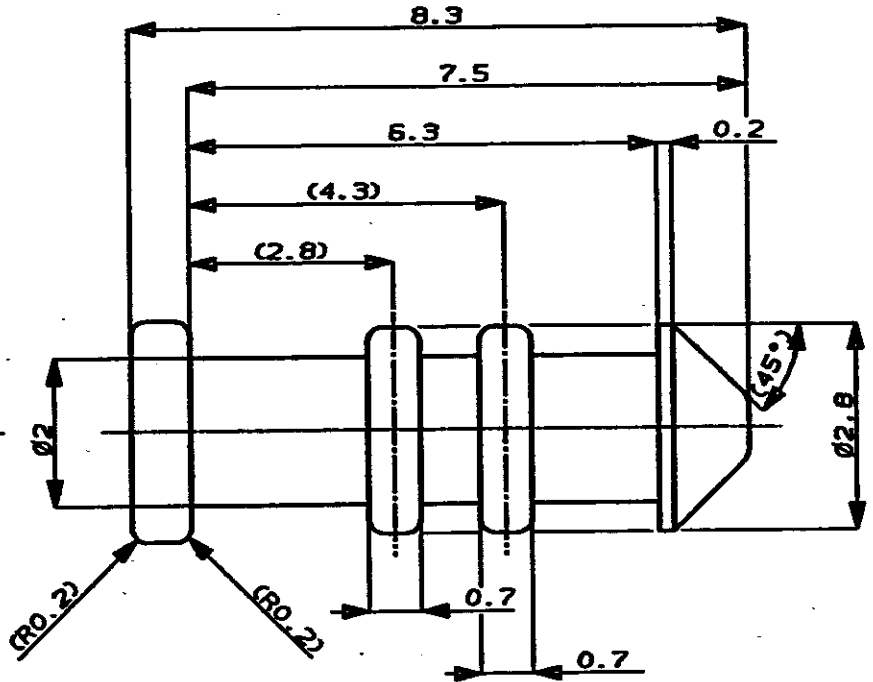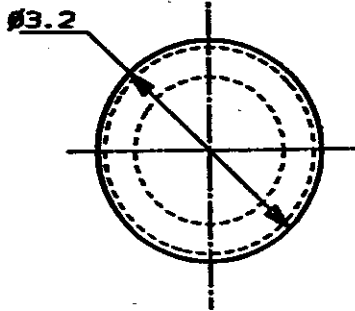

ALL DIMENSIONS IN MM. DO NOT SCALE PRINT

Copyright ©1990 AMP

Copyright ©1990 AMP (Japan), LTD. ALL RIGHTS RESERVED.

**AMP**

日本エー・エム・ピー株式会社  
Tokyo, Japan

一般公差 (GENERAL TOLERANCE)  
100μT : ±0.2  
100μM 300μT : ±0.25  
300μM 1000μT : ±0.3  
角 度 : ±3°

絶縁体巻線耐熱温度 (WIRE RANGE)  
- 105°C (AWG - )

被覆外径 (INSULATION DIA.)

材料 (MATERIAL)  
PBT

色 (COLOR)  
YELLOW  
黄色

PRINT DIST	0	RELEASED 作成	J-0357	T.S. OA	10/23 '91	尺取 (SCALE)	10-1	LOC	A	J	番号 (No.)	C-178421	REV.	0	SHEET	1 OF 1
	LTR	変更 (REVISION RECORD)		DR	CHK	DATE										
	DR.	T. Sogawa 10/21 '91		DE.	T. Sogawa 10/21 '91		名称 (NAME)			CAVITY PLUS						
CHK.	D. Aoyama 10/23 '91		APP.	M. Akita 10/23 '91					.040 SERIES SEALED PAIR MATE CONN.							
												.040シリーズ シールド ペアメイト コネクタ				

REV. 10/83

(CUSTOMER DRAWING) 参 考 図 面

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[178421-7](#)