

## New TWND Series — Full Size NEMA Pushbuttons

**New! TWND Series: Heavy duty switches built to last****Key features:**

- Variety of button sizes up to 2 9/16" (65mm)
- Rugged construction includes chrome plated zinc locking ring die cast zinc mounting thread
- LED illumination
- Transformer or full voltage
- Slow make, double break wiping contacts
- Modular construction for maximum flexibility
- Available assembled or as sub-components
- UL Type 4X, 13 and IP65 watertight/oiltight panel

The rugged series of TWND switches offers both variety and durability in an attractive design.

With button sizes up to 2 9/16" (65mm), chrome plated zinc locking rings, die cast zinc mounting threads, steel anti-rotation rings, and self cleaning contacts, the TWNDs are here to stay.

The TWND series also offers LED illumination in full voltage and transformer models.

Regardless of your switching needs, the NEW TWND series provides the kind of long lasting, industrial strength quality you've come to expect from IDEC.



UL Listed  
File No. E68961



File No. LR21451



R 50363567



Certificate No.  
2016010305902410

Switches & Pilot Devices

Signaling Lights

Relays & Sockets

Timers

Contactors

Terminal Blocks

Circuit Breakers

Specifications

|                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Conforming to Standards                        | EN60947-5-1, UL508, CSA C22-2 No.14                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Approvals                                      | <b>CSA:</b> pushbuttons and selector switches: A600 pilot lights and illuminated pushbuttons, direct supply pilot lights and illuminated pushbut-<br>tons with integral transformer (100/110, 115, 120, 200/220, 230, 240, 380, 400/440, 480V)<br><b>UL:</b> pushbuttons and selector switches: A600 pilot lights and illuminated pushbuttons, direct supply pilot lights and illuminated pushbuttons<br>with integral transformer (100/110, 115, 120, 200/220, 230, 240, 380, 400/440, 480V)<br><b>TÜV:</b> pushbuttons and selector switches: A600 pilot lights and illuminated pushbuttons, direct supply pilot lights and illuminated pushbut-<br>tons with integral transformer (100/110, 115, 120, 200/220, 230, 240, 380, 400/440, 480V) |
| Operating Temperature                          | Operation: -25 to +50°C (illuminated versions) -25 ~ +70C non-illuminated<br>Storage: -40 to +80°C (without freezing) C-> °C                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Vibration Resistance                           | 5 to 55Hz, 98m/sec² (10g) conforming to IEC60068-2-6                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Shock Resistance                               | 980m/sec² (100g) conforming to IEC60068-2-27                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Electric Shock Protection                      | Class 2 conforming to IEC60664-1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Degree of Protection                           | IP65 (from front of the panel) (conforming to IEC60529)<br>UL Type 1, 2, 3, 3R, 3S, 4, 4X, 5, 12, 13 (conforming to NEMA ICS6-110)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Mechanical Life                                | Momentary pushbuttons: 5,000,000 (1800 operations per hour)<br>All other switches: 500,000                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Pollution Degree<br>(conforming to IEC60947-1) | 3                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |

Mechanical-Electrical Specifications

|                                                            |                                                                                                                                                                              |                   |                              |                                    |                |                   |
|------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|------------------------------|------------------------------------|----------------|-------------------|
| Rated Operational Characteristics                          | AC-15: A600                                                                                                                                                                  |                   |                              |                                    |                |                   |
| Rated Insulation Voltage                                   | 600V                                                                                                                                                                         |                   |                              |                                    |                |                   |
| Rated Impulse Withstanding Voltage<br>øDielectric Strength | Between live and dead metal parts<br>2.5kV AC, 1 minute                                                                                                                      |                   |                              |                                    |                |                   |
| Rated Thermal Current                                      | 10 Amp                                                                                                                                                                       |                   |                              |                                    |                |                   |
| Minimum Switching Capacity                                 | 5 mA at 3V AC/DC (applicable range may vary with operating conditions and load types)                                                                                        |                   |                              |                                    |                |                   |
| Contact Operation                                          | Slow break NC or NO                                                                                                                                                          |                   |                              |                                    |                |                   |
| Operating Force                                            | Flush and extended pushbuttons—with 1NO or 1NC contact: 6.2±2N (momentary), 9.0±1.5N<br>Additional contacts—1NO or 1NC: +3.0N                                                |                   |                              |                                    |                |                   |
| Recommended Terminal Torque                                | Unit                                                                                                                                                                         | Wire              | Number of Wires              | Recommended Tightening Torque (Nm) | Terminal Screw |                   |
|                                                            | HW-U Contact Block                                                                                                                                                           | Crimping Terminal |                              | 2                                  | 1.0 to 1.3     | M3.5              |
|                                                            |                                                                                                                                                                              | Solid Wire        | ø0.5 to 1.6 mm (AWG14 to 22) | 2                                  | 1.0 to 1.3     |                   |
|                                                            |                                                                                                                                                                              |                   | ø1.7 to 2.0 mm (AWG12)       | 1                                  | 1.2 to 1.3     |                   |
|                                                            |                                                                                                                                                                              | Stranded Wire     | 0.3 to 2.0 mm² (AWG14 to 22) | 2                                  | 1.0 to 1.3     |                   |
|                                                            |                                                                                                                                                                              |                   | 2.1 to 3.5 mm² (AWG12)       | 1                                  | 1.2 to 1.3     |                   |
|                                                            | Illuminated Unit (*1)                                                                                                                                                        | Crimping Terminal |                              | 2                                  | 1.0 to 1.3     | M3.5              |
|                                                            |                                                                                                                                                                              | Solid Wire        | ø0.5 to 1.6 mm (AWG14 to 22) |                                    |                |                   |
|                                                            |                                                                                                                                                                              | Stranded Wire     | 0.3 to 2.0 mm (AWG14 to 22)  |                                    |                |                   |
|                                                            | Applicable Wire Size                                                                                                                                                         | Pilot Light       | Crimping Terminal            |                                    | 2              | 0.6 to 1.0 (M3.0) |
| Solid Wire                                                 |                                                                                                                                                                              |                   | ø0.5 to 1.6 mm (AWG14 to 22) | 1.0 to 1.3 (M3.5)                  |                |                   |
| Stranded Wire                                              |                                                                                                                                                                              |                   | ø0.3 to 2.0 mm (AWG14 to 22) |                                    |                |                   |
|                                                            |  1. * refers to the lamp terminals of the illuminated push buttons and selector switches. |                   |                              |                                    |                |                   |
| Contact Resistance                                         | Initial contact resistance of 50mΩ or less                                                                                                                                   |                   |                              |                                    |                |                   |
| Contact Gap                                                | 4mm (NO and NC)<br>2mm (NO-EM and NC-LB)                                                                                                                                     |                   |                              |                                    |                |                   |
| LED Ratings                                                | LEDs: 6V: 8mA, 12V: 11mA, 24V: 11mA, 120V: 8.8mA, 240V: 8.6mA                                                                                                                |                   |                              |                                    |                |                   |
| Contact Material                                           | Silver                                                                                                                                                                       |                   |                              |                                    |                |                   |

Contact Ratings

|                                                       |             |                                                      |              |     |     |      |      |      |
|-------------------------------------------------------|-------------|------------------------------------------------------|--------------|-----|-----|------|------|------|
| Contact Ratings by Utilization Category IEC 60947-5-1 |             |                                                      | AC-15 (A600) |     |     |      |      |      |
|                                                       |             |                                                      | DC-13 (P600) |     |     |      |      |      |
| Contact Ratings by Utilization Category               |             |                                                      |              |     |     |      |      |      |
| Operational Voltage                                   |             |                                                      | 24V          | 48V | 50V | 110V | 220V | 440V |
| Operation Current                                     | AC 50/60 Hz | AC-12 Control of resistive loads & solid state loads | 10A          | —   | 10A | 10A  | 6A   | 2A   |
|                                                       |             | AC-15 Control of electromagnetic loads (> 72VA)      | 10A          | —   | 7A  | 5A   | 3A   | 1A   |
|                                                       | DC          | DC-12 Control of resistive loads & solid state loads | 10A          | 5A  | —   | 2.2A | 1.1A | —    |
|                                                       |             | DC-13 Control of electromagnets                      | 5A           | 2A  | —   | 1.1A | 0.6A | —    |

Non-Illuminated Pushbuttons (Assembled)



**Assembled Pushbuttons**

A B ( ) D 1 10 NU R

**Function**

B: Momentary  
O: Maintained  
V: Pushlock Turn Reset  
Y: Push-Pull

**Bezel Shape**

Blank: Octagonal  
F: Full Shroud  
G: Mushroom Shroud  
P: Neoprene Boot

**Series Designation**

D: TWND Series

**Button Color**

B: Black    G: Green    W: White  
R: Red      S: Blue     Y: Yellow

**Contact Arrangement**

10: 1NO      01: 1NC  
20: 2NO      02: 2NC  
11: 1NO-1NC    22: 2NO-2NC

**Button Shape**

1: Flush  
2: Extended  
3: Mushroom ø 40mm  
4: Jumbo Mushroom ø 65mm

1. Use only when interpreting part numbers. Do not use for developing part numbers.  
2. Custom contact configurations available, contact IDEC for details.

## Non-Illuminated Pushbuttons (Assembled)

### Non-Illuminated Pushbuttons

| Style                                          | Contacts                            | Momentary                                                          | Maintained                                                         |
|------------------------------------------------|-------------------------------------|--------------------------------------------------------------------|--------------------------------------------------------------------|
| Flush                                          | 1NO<br>1NC<br>1NO-1NC<br>2NO<br>2NC | ABD110NU①<br>ABD101NU①<br>ABD111NU①<br>ABD120NU①<br>ABD102NU①      | AOD110NU①<br>AOD101NU①<br>AOD111NU①<br>AOD120NU①<br>AOD102NU①      |
| Extended                                       | 1NO<br>1NC<br>1NO-1NC<br>2NO<br>2NC | ABD210NU①<br>ABD201NU①<br>ABD211NU①<br>ABD220NU①<br>ABD202NU①      | AOD210NU①<br>AOD201NU①<br>AOD211NU①<br>AOD220NU①<br>AOD202NU①      |
| Extended with Neoprene Boot <sup>†</sup>       | 1NO<br>1NC<br>1NO-1NC<br>2NO<br>2NC | ABPD210NU①<br>ABPD201NU①<br>ABPD211NU①<br>ABPD220NU①<br>ABPD202NU① | AOPD210NU①<br>AOPD201NU①<br>AOPD211NU①<br>AOPD220NU①<br>AOPD202NU① |
| Recessed                                       | 1NO<br>1NC<br>1NO-1NC<br>2NO<br>2NC | ABFD110NU①<br>ABFD101NU①<br>ABFD111NU①<br>ABFD120NU①<br>ABFD102NU① | AOFD110NU①<br>AOFD101NU①<br>AOFD111NU①<br>AOFD120NU①<br>AOFD102NU① |
| Extended with Full Shroud                      | 1NO<br>1NC<br>1NO-1NC<br>2NO<br>2NC | ABFD210NU①<br>ABFD201NU①<br>ABFD211NU①<br>ABFD220NU①<br>ABFD202NU① | AOFD210NU①<br>AOFD201NU①<br>AOFD211NU①<br>AOFD220NU①<br>AOFD202NU① |
| ø 40mm Mushroom Head                           | 1NO<br>1NC<br>1NO-1NC<br>2NO<br>2NC | ABD310NU①<br>ABD301NU①<br>ABD311NU①<br>ABD320NU①<br>ABD302NU①      | AOD310NU①<br>AOD301NU①<br>AOD311NU①<br>AOD320NU①<br>AOD302NU①      |
| ø 40mm Mushroom Head with Full Shroud          | 1NO<br>1NC<br>1NO-1NC<br>2NO<br>2NC | ABGD310NU①<br>ABGD301NU①<br>ABGD311NU①<br>ABGD320NU①<br>ABGD302NU① | AOGD310NU①<br>AOGD301NU①<br>AOGD311NU①<br>AOGD320NU①<br>AOGD302NU① |
| ø 65mm Jumbo Mushroom Head                     | 1NO<br>1NC<br>1NO-1NC<br>2NO<br>2NC | ABD410NU①<br>ABD401NU①<br>ABD411NU①<br>ABD420NU①<br>ABD402NU①      | AOD410NU①<br>AOD401NU①<br>AOD411NU①<br>AOD420NU①<br>AOD402NU①      |
| ø 65mm Jumbo Mushroom Head with Shallow Shroud | 1NO<br>1NC<br>1NO-1NC<br>2NO<br>2NC | ABGD410NU①<br>ABGD401NU①<br>ABGD411NU①<br>ABGD420NU①<br>ABGD402NU① | AOGD410NU①<br>AOGD401NU①<br>AOGD411NU①<br>AOGD420NU①<br>AOGD402NU① |
| ø 65mm Jumbo Mushroom Head With Deep Shroud    | 1NO<br>1NC<br>1NO-1NC<br>2NO<br>2NC | ABFD410NU①<br>ABFD401NU①<br>ABFD411NU①<br>ABFD420NU①<br>ABFD402NU① | AOFD410NU①<br>AOFD401NU①<br>AOFD411NU①<br>AOFD420NU①<br>AOFD402NU① |

### ① Button Color Codes

| Color  | Code |
|--------|------|
| Black  | B    |
| Green  | G    |
| Red    | R    |
| Blue   | S    |
| Yellow | Y    |
| White  | W    |



- 65mm Jumbo mushroom not available in white.
- Neoprene boot is not available in blue or white.



- In place of ①, specify the Button Color Code.
- For sub-assembly part numbers, see next page.
- \*Neoprene boot available only in Black (B), Green (G), Red (R) and Yellow (Y).

## Non-Illuminated Pushbuttons (Sub-Assembled)



## Operators

| Style                                     |  | Part Number |             |
|-------------------------------------------|--|-------------|-------------|
|                                           |  | Momentary   | Maintained  |
| Flush/Extended                            |  | ABD1200T8   | AOD1200T8   |
| Extended with Full Shroud                 |  | ALFD2300T8  | AOLFD2300T8 |
| ø 40mm Mushroom/ø 65mm Jumbo Mushroom     |  | ABD3400T8   | AOD3400T8   |
| ø 40mm Mushroom with Full Shroud          |  | ABGD-300T   | AOGD-300T   |
| ø 65mm Jumbo Mushroom with Shallow Shroud |  | ABGD-400T   | AOGD-400T   |
| ø 65mm Jumbo Mushroom with Deep Shroud    |  | ABFD-400T   | AOFD-400T   |

## Buttons and Lenses

| Style                 | Part Number |
|-----------------------|-------------|
| Flush                 | ABD1BN-①    |
| Extended              | ABD2BN-①    |
| ø 40mm Mushroom       | ABD3BN-①    |
| ø 65mm Jumbo Mushroom | ABD4BN-①    |



In place of ①, specify the Button Color Code. (See table previous page)

## Contact Blocks

| Style             |  | Part Number                        |                                    |
|-------------------|--|------------------------------------|------------------------------------|
|                   |  | 1NO                                | 1NC                                |
| All Control Units |  | HW-U10-F<br>HW-U10R-F (early make) | HW-U01-F<br>HW-U01R-F (late break) |
| Dummy Block       |  | HW-DB                              |                                    |



- Dummy blocks (no contacts) are used with an odd number of contact blocks.
- Combining HW-U10R-F and HW-U01R-F result in overlapping contacts (remain on, or closed, when switch is moved between two positions).

Stop Switches (Assembled)



Assembled Stop Switches

|                             | A | V                                      | (L)                           | D              | 3                | 22 | 11 | D | NU | R |                                                                            |
|-----------------------------|---|----------------------------------------|-------------------------------|----------------|------------------|----|----|---|----|---|----------------------------------------------------------------------------|
| <b>Function</b>             |   | V: Pushlock Turn Reset<br>Y: Push-Pull |                               |                |                  |    |    |   |    |   | <b>Button/Lens Color Code</b>                                              |
| <b>Illumination</b>         |   |                                        | Blank: None<br>L: Illuminated |                |                  |    |    |   |    |   | A: Amber<br>G: Green<br>R: Red<br>S: Blue<br>W: White<br>Y: Yellow         |
| <b>Series Designation</b>   |   |                                        |                               | D: TWND Series |                  |    |    |   |    |   | (illuminated units only)<br>D: LED                                         |
| <b>Button/Lens Size</b>     |   |                                        |                               |                | 3: 40mm Mushroom |    |    |   |    |   | <b>Contact Arrangement</b>                                                 |
| <b>Illumination Circuit</b> |   |                                        |                               |                |                  |    |    |   |    |   | 10: 1NO      01: 1NC<br>20: 2NO      02: 2NC<br>11: 1NO-1NC    22: 2NO-2NC |

1. Use only when interpreting part numbers. Do not use for developing part numbers.  
2. Custom contact configurations available, contact IDEC for details.

## Stop Switches (Assembled)

## Stop Switches

| Style                                                                                                                       | Contacts                            | Part Number                                                        |
|-----------------------------------------------------------------------------------------------------------------------------|-------------------------------------|--------------------------------------------------------------------|
| ø 40mm Pushlock Turn Reset<br>             | 1NO<br>1NC<br>1NO-1NC<br>2NO<br>2NC | AVD310NUR*<br>AVD301NUR*<br>AVD311NUR*<br>AVD320NUR*<br>AVD302NUR* |
| ø 40mm Illuminated Pushlock Turn Reset<br> | 1NO-1NC<br>2NO<br>2NC               | AVLD3③11DNUR*<br>AVLD3③20DNUR*<br>AVLD3③02DNUR*                    |
| ø 40mm Push-Pull<br>                       | 1NO<br>1NC<br>1NO-1NC<br>2NO<br>2NC | AYD310NU①<br>AYD301NU①<br>AYD311NU①<br>AYD320NU①<br>AYD302NU①      |
| ø 40mm Illuminated Push-Pull<br>          | 1NO-1NC<br>2NO<br>2NC               | AYLD3③11DNU② **<br>AYLD3③20DNU② **<br>AYLD3③02DNU② **              |
|                                                                                                                             | 1NO-1NC<br>2NO<br>2NC               | AYLD3④11DNU② **<br>AYLD3④20DNU② **<br>AYLD3④02DNU② **              |

## ① Button Color Codes

| Color  | Code |
|--------|------|
| Black  | B    |
| Green  | G    |
| Red    | R    |
| Blue   | S    |
| Yellow | Y    |

## ② Lens Color Codes

| Color  | Code |
|--------|------|
| Amber  | A    |
| Green  | G    |
| Red    | R    |
| Blue   | S    |
| White  | W    |
| Yellow | Y    |

## ③ Full Voltage Codes

| Voltage   | Code |
|-----------|------|
| 6V AC/DC  | 66   |
| 12V AC/DC | 11   |
| 24V AC/DC | 22   |
| 120V AC   | QH2  |
| 240V AC   | QM4  |

## ④ Transformer Voltage Codes


| Voltage | Code |
|---------|------|
| 120VAC  | 126  |
| 240VAC  | 246  |
| 480VAC  | 486  |



Transformers step down to 6V.

1. In place of ①, specify the button color code.
2. In place of ②, specify the lens color code.
3. In place of ③, specify the Full Voltage (lamp voltage) Code.
4. \* Only available in red.
5. In place of ④, specify the transformer voltage code.
6. \*\*Not available in blue.
7. For sub-assembly part numbers, see next page.
8. For nameplates and accessories, see page 769 and page 767.
9. For dimensions, see page 772.

## Stop Switches (Sub-Assembled)

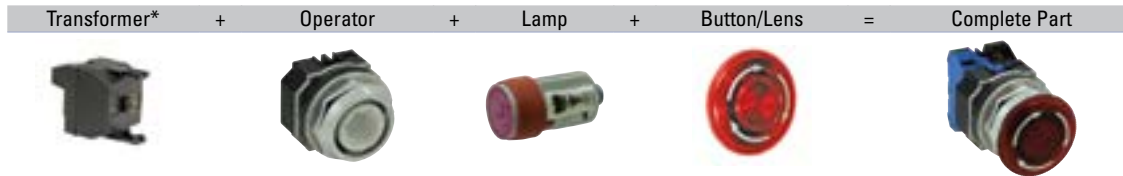

\* Not required for full voltage units.

### Operators

| Style                                                     |  | Part Number |
|-----------------------------------------------------------|--|-------------|
| ø40mm Illuminated and Non-illuminated Pushlock Turn Reset |  | AVD000T8    |
| ø 40mm Illuminated and Non-illuminated Push-Pull          |  | AYD000T8    |

### Buttons and Lenses

| Style                                                                    |  | Part Number |
|--------------------------------------------------------------------------|--|-------------|
| Button for Pushlock Turn Reset Stop Switches (ø40mm, red only)           |  | AVN3B-R     |
| Lens for Illuminated Pushlock Turn Reset Stop Switches (ø40mm, red only) |  | AVLN3LU-R   |
| Button for Push-Pull Stop Switches (ø40mm)                               |  | AYD3BN-①    |
| Lens for Illuminated Push-Pull Stop Switches (ø40mm)                     |  | AYLD3L-②    |

1. In place of ①, specify the Button Color Code. (See table below)
2. In place of ②, specify the LED Color Code.
3. \*Not available in blue.

### Lamp Circuit Components

| Style            | Application                                                   | Part Number |
|------------------|---------------------------------------------------------------|-------------|
| Long Lamp Holder | <b>Used with</b> Full-size Transformer and two contact blocks | TW-LH2      |
|                  | <b>Used with</b> Full Voltage Adaptor and two contact blocks  |             |
| Lead Holder      | <b>Used with</b> TW-LH2 holder when using four contact blocks | HW-LH3      |

### Lamps

| Style | Voltage   | Part Number |
|-------|-----------|-------------|
|       | 6V AC/DC  | LSTD-6③     |
|       | 12V AC/DC | LSTD-1③     |
|       | 24V AC/DC | LSTD-2③     |
|       | 120V AC   | LSTD-H2③    |
|       | 240V AC   | LSTD-M4③    |



1. In place of ③, specify the LED color code.
2. The LED contains a current-limiting resistor and a protection diode.

### ① Button Color Codes

| Color  | Code |
|--------|------|
| Black  | B    |
| Green  | G    |
| Red    | R    |
| Blue   | S    |
| Yellow | Y    |

### ② Lens Color Codes

| Color | Code |
|-------|------|
| Amber | A    |
| Green | G    |
| Red   | R    |
| Blue  | S    |
| White | W    |

### ③ LED Color Codes

| Color | Code |
|-------|------|
| Amber | A    |
| Green | G    |
| Red   | R    |
| Blue  | S    |
| White | W    |

### Contact Blocks

| Style             |  | Part Number            |                        |
|-------------------|--|------------------------|------------------------|
|                   |  | 1NO                    | 1NC                    |
| All Control Units |  | HW-U10-F               | HW-U01-F               |
|                   |  | HW-U10R-F (early make) | HW-U01R-F (late break) |
| Dummy Block       |  | HW-DB                  |                        |



1. Dummy blocks (no contacts) are used with an odd number of contact blocks.
2. Combining HW-U10R-F and HW-U01R-F result in overlapping contacts.

### Transformers

| Style | Primary Voltage (50/60Hz) | Part Number |
|-------|---------------------------|-------------|
|       | 120V AC                   | TW-F126B    |
|       | 240V AC                   | TW-F246B    |
|       | 480V AC                   | HW-L486     |



6V secondary voltage (uses 6V LED).

### Full Voltage Modules

| Style                                 |  | Description                           | Part Number              |
|---------------------------------------|--|---------------------------------------|--------------------------|
| Dummy Block with Full Voltage Adaptor |  | For use with odd number of contacts.  | Finger-Safe<br>HW-DA1FBN |
| Full Voltage Adaptor                  |  | For use with even number of contacts. | Finger-Safe<br>TW-DA1FB  |



All Transformers step down to 6V (use 6V lamp).

## Pilot Lights (Assembled)



## Assembled Pilot Lights

|                                            |          |          |          |          |            |          |           |          |                        |
|--------------------------------------------|----------|----------|----------|----------|------------|----------|-----------|----------|------------------------|
| <b>Function</b>                            | <b>A</b> | <b>P</b> | <b>D</b> | <b>1</b> | <b>126</b> | <b>D</b> | <b>NU</b> | <b>R</b> | <b>Lens Color Code</b> |
| P: Pilot Light                             |          |          |          |          |            |          |           |          | A: Amber               |
| <b>Series Designation</b>                  |          |          |          |          |            |          |           |          | G: Green               |
| D: TWND Series                             |          |          |          |          |            |          |           |          | R: Red                 |
| <b>Lens Shape</b>                          |          |          |          |          |            |          |           |          | S: Blue                |
| 1: Dome                                    |          |          |          |          |            |          |           |          | W: White               |
| <b>Rated Operational Voltage (Primary)</b> |          |          |          |          |            |          |           |          | Y: Yellow              |
| Transformer Type                           |          |          |          |          |            |          |           |          | D: LED                 |
| 126: 120V AC                               |          |          |          |          |            |          |           |          |                        |
| 246: 240V AC                               |          |          |          |          |            |          |           |          |                        |
| 486: 480V AC                               |          |          |          |          |            |          |           |          |                        |
| Full Voltage Type                          |          |          |          |          |            |          |           |          |                        |
| 66: 6VAC/DC                                |          |          |          |          |            |          |           |          |                        |
| 11: 12VAC/DC                               |          |          |          |          |            |          |           |          |                        |
| 22: 24VAC/DC                               |          |          |          |          |            |          |           |          |                        |
| QH2: 120VAC                                |          |          |          |          |            |          |           |          |                        |
| QM4: 240VAC                                |          |          |          |          |            |          |           |          |                        |



Use only when interpreting part numbers. Do not use for developing part numbers.

## LED Pilot Lights

| Style             | Operating Voltage             | Part Number                               |
|-------------------|-------------------------------|-------------------------------------------|
|                   |                               | LED                                       |
| Transformer Dome  | 120V AC<br>240V AC<br>480V AC | APD1126DNU②<br>APD1246DNU②<br>APD1486DNU② |
| Full Voltage Dome | —                             | APD1③DNU②                                 |



1. In place of ②, specify the Lens/LED Color Code.
2. In place of ③, specify the Full Voltage Code (LED voltage).
3. Yellow pilot light comes with white LED.

## ② Lens Color Codes

| Color  | Code |
|--------|------|
| Amber  | A    |
| Green  | G    |
| Red    | R    |
| Blue   | S    |
| White  | W    |
| Yellow | Y    |

## ③ Full Voltage Codes

| Voltage   | Code |
|-----------|------|
| 6V AC/DC  | 66   |
| 12V AC/DC | 11   |
| 24V AC/DC | 22   |
| 120V AC   | QH2  |
| 240V AC   | QM4  |

## Pilot Lights (Sub-Assembled)

|              |   |          |   |      |   |      |   |               |
|--------------|---|----------|---|------|---|------|---|---------------|
| Transformer* | + | Operator | + | Lamp | + | Lens | = | Complete Part |
|--------------|---|----------|---|------|---|------|---|---------------|



\* Not required for full voltage units.

| One Each from Left Column | plus | One Selection from Right Column |
|---------------------------|------|---------------------------------|
|---------------------------|------|---------------------------------|

### Operators

| Style                       | Part Number |
|-----------------------------|-------------|
| Transformer or FULL Voltage | APD09ST8    |

### Full Voltage Clips

| Primary Voltage (50/60Hz)                                                           | Part Number |
|-------------------------------------------------------------------------------------|-------------|
|  | APD-F       |



Required for all full voltage models. Two pieces each.  
2 clips required for full voltage pilot lights

### Transformers (only for Pilot Lights)

| Style | Primary Voltage (50/60Hz) | Part Number |
|-------|---------------------------|-------------|
| LED   | 120V AC                   | TWD-0126    |
|       | 240V AC                   | TWD-0246    |
|       | 480V AC                   | TWD-0486    |



6V secondary voltage (use 6V lamp).

### Lenses

| Style     | Part Number |
|-----------|-------------|
| Dome Lens | APN106LN-②  |



1. In place of ②, specify the Lens Color Code.

### Lamps

| Style | Voltage   | Part Number |
|-------|-----------|-------------|
| LED   | 6V AC/DC  | LSTD-6③     |
|       | 12V AC/DC | LSTD-1③     |
|       | 24V AC/DC | LSTD-2③     |
|       | 120V AC   | LSTD-H2③    |
|       | 240V AC   | LSTD-M4③    |



1. In place of ②, specify the LED color code.  
2. The LED contains a current-limiting resistor and a protection diode.

### ② Lens Color Codes

| Color  | Code |
|--------|------|
| Amber  | A    |
| Green  | G    |
| Red    | R    |
| Blue   | S    |
| White  | W    |
| Yellow | Y    |

### ③ LED Color Codes

| Color | Code |
|-------|------|
| Amber | A    |
| Green | G    |
| Red   | R    |
| Blue  | S    |
| White | W    |



Yellow LED not available, use white LED with Yellow lens.

Illuminated Pushbuttons (Assembled)



Assembled Illuminated Pushbuttons

A L ( ) D 2 126 11 D NU R

Function

L: Momentary Action  
OL: Maintained Action

Bezel Shape

Blank: Octagonal  
F: Full Shroud

Series Designation

D: TWND Series

Lens Shape

2: Extended  
3: Mushroom ø 40mm

Rated Operational Voltage (Primary)

| Transformer Type | Full Voltage Type |
|------------------|-------------------|
| 126: 120V AC     | 66: 6VAC/DC       |
| 246: 240V AC     | 11: 12VAC/DC      |
| 486: 480V AC     | 22: 24VAC/DC      |
|                  | QH2: 120VAC       |
|                  | QM4: 240VAC       |

Lens Color Code

A: Amber  
G: Green  
R: Red  
S: Blue  
W: White  
Y: Yellow

D: LED

Contact Arrangement

20: 2NO      02: 2NC  
11: 1NO-1NC



1. Use only when interpreting part numbers. Do not use for developing part numbers.
2. All transformers step down to 6V.

## Illuminated Pushbuttons (Assembled)

### Illuminated Pushbuttons

| Style                                                                                                               |              | Contacts              | Part Number                                        |                                                       |
|---------------------------------------------------------------------------------------------------------------------|--------------|-----------------------|----------------------------------------------------|-------------------------------------------------------|
|                                                                                                                     |              |                       | Momentary                                          | Maintained                                            |
| Extended Lens<br>                  | Full Voltage | 1NO-1NC<br>2NO<br>2NC | ALD2③11DNU②<br>ALD2③20DNU②<br>ALD2③02DNU②          | AOLD2③11DNU②<br>AOLD2③20DNU②<br>AOLD2③02DNU②          |
|                                                                                                                     | Transformer  | 1NO-1NC<br>2NO<br>2NC | ALD2 ④ 11DNU②<br>ALD2 ④ 20DNU②<br>ALD2 ④ 02DNU②    | AOLD2 ④ 11DNU②<br>AOLD2 ④ 20DNU②<br>AOLD2 ④ 02DNU②    |
| Extended Lens with Full Shroud<br> | Full Voltage | 1NO-1NC<br>2NO<br>2NC | ALFD2③11DNU②<br>ALFD2③20DNU②<br>ALFD2③02DNU②       | AOLFD2③11DNU②<br>AOLFD2③20DNU②<br>AOLFD2③02DNU②       |
|                                                                                                                     | Transformer  | 1NO-1NC<br>2NO<br>2NC | ALFD2 ④ 11DNU②<br>ALFD2 ④ 20DNU②<br>ALFD2 ④ 02DNU② | AOLFD2 ④ 11DNU②<br>AOLFD2 ④ 20DNU②<br>AOLFD2 ④ 02DNU② |
| ø 40mm Mushroom Lens<br>         | Full Voltage | 1NO-1NC<br>2NO<br>2NC | ALD3③11DNU②<br>ALD3③20DNU②<br>ALD3③02DNU②          | AOLD3③11DNU②<br>AOLD3③20DNU②<br>AOLD3③02DNU②          |
|                                                                                                                     | Transformer  | 1NO-1NC<br>2NO<br>2NC | ALD3 ④ 11DNU②<br>ALD3 ④ 20DNU②<br>ALD3 ④ 02DNU②    | AOLD3 ④ 11DNU②<br>AOLD3 ④ 20DNU②<br>AOLD3 ④ 02DNU②    |

### ② Lens Color Codes

| Color  | Code |
|--------|------|
| Amber  | A    |
| Green  | G    |
| Red    | R    |
| Blue   | S    |
| White  | W    |
| Yellow | Y    |

### ③ Full Voltage Codes

| Voltage   | Code |
|-----------|------|
| 6V AC/DC  | 66   |
| 12V AC/DC | 11   |
| 24V AC/DC | 22   |
| 120V AC   | QH2  |
| 240V AC   | QM4  |

### ④ Transformer Voltage Codes

| Voltage | Code |
|---------|------|
| 120VAC  | 126  |
| 240VAC  | 246  |
| 480VAC  | 486  |

 6V secondary voltage (uses 6V LED).

-  1. In place of ②, specify the Lens Color Code.  
 2. In place of ③, specify the Full Voltage Code (LED voltage).  
 3. In place of ④, specify the Transformer Voltage Code.  
 4. Light is independent of switch position.  
 5. Yellow pushbutton comes with white LED only.

## Illuminated Pushbuttons (Sub-Assembled)

Transformer\* + Contact Block + Operator + LED + Lens = Complete Part



\*Not required for full voltage types.

## Operators

| Style                     |  | Part Number |             |
|---------------------------|--|-------------|-------------|
|                           |  | Momentary   | Maintained  |
| Extended                  |  | ALD2300T8   | AOLD2300T8  |
| Extended with Full Shroud |  | ALFD2300T8  | AOLFD2300T8 |
| 40mm Mushroom             |  | ALD2300T8   | AOLD2300T8  |

## Lenses

| Style           |  | Part Number |
|-----------------|--|-------------|
| Extended        |  | ALN06LU-②   |
| ø 40mm Mushroom |  | ALN3LU-②    |



In place of ②, specify the Lens Color Code.

## Lamp Circuit Components

| Style                | Application                                                                                                                       | Part Number |
|----------------------|-----------------------------------------------------------------------------------------------------------------------------------|-------------|
| Long Lamp Holder<br> | <b>Used with</b> Full-size Transformer and two contact blocks<br><br><b>Used with</b> Full Voltage Adaptor and two contact blocks | TW-LH2      |
| Lead Holder<br>      | <b>Used with</b> TW-LH2 holder when using four contact blocks                                                                     | HW-LH3      |

## Lamps

| Style | Voltage   | Part Number |
|-------|-----------|-------------|
|       | 6V AC/DC  | LSTD-6③     |
|       | 12V AC/DC | LSTD-1③     |
|       | 24V AC/DC | LSTD-2③     |
|       | 120V AC   | LSTD-H2③    |
|       | 240V AC   | LSTD-M4③    |



- In place of ②, specify the LED color code.
- The LED contains a current-limiting resistor and a protection diode.

## ② Lens Color Codes

| Color  | Code |
|--------|------|
| Amber  | A    |
| Green  | G    |
| Red    | R    |
| Blue   | S    |
| White  | W    |
| Yellow | Y    |

## ③ LED Color Codes

| Color | Code |
|-------|------|
| Amber | A    |
| Green | G    |
| Red   | R    |
| Blue  | S    |
| White | W    |



Yellow lens only. Yellow LED not available, use white LED.

## Contact Blocks

| Style                 |  | Part Number            |                        |
|-----------------------|--|------------------------|------------------------|
|                       |  | 1NO                    | 1NC                    |
| All Control Units<br> |  | HW-U10-F               | HW-U01-F               |
|                       |  | HW-U10R-F (early make) | HW-U01R-F (late break) |
| Dummy Block<br>       |  | HW-DB                  |                        |



- Dummy blocks (no contacts) are used with an odd number of contact blocks.
- Combining HW-U10R-F and HW-U01R-F result in overlapping contacts (remain on, or closed, when switch is moved between two positions).

## Transformers

| Style | Primary Voltage (50/60Hz) | Part Number |
|-------|---------------------------|-------------|
|       | 120V AC                   | TW-F126B    |
|       | 240V AC                   | TW-F246B    |
|       | 480V AC                   | HW-L486     |



6V secondary voltage (use 6V LED).

## Full Voltage Modules

| Style                                     | Description                           | Part Number              |
|-------------------------------------------|---------------------------------------|--------------------------|
| Dummy Block with Full Voltage Adaptor<br> | For use with odd number of contacts.  | Finger-Safe<br>HW-DA1FBN |
| Full Voltage Adaptor<br>                  | For use with even number of contacts. | Finger-Safe<br>TW-DA1FB  |



All Transformers step down to 6V (use 6V lamp).

Non-Illuminated Selector Switches (Assembled)



Assembled Selector Switches

A S D 2 ( ) ( ) 11 NU - ( )

**Function**

S: Selector Switch

**Series Designation**

D: TWND Series

**Number of Positions**

2: 2-Position  
3: 3-Position

**Spring Return Action**

Blank: Maintained  
1: Spring return from Right  
2: Spring return from Left  
3: 2-Way spring return from Left and Right

**Circuit Number**

(See Circuit # column of Selector Switch Contact Arrangement Chart on beginning on page 764.)

**Contact Arrangement Code**

10: 1NO    01: 1NC  
20: 2NO    02: 2NC  
40: 4NO    04: 4NC  
11: 1NO-1NC    22: 2NO-2NC

**Operator Style Code**

Blank: Knob Operator  
L: Lever Operator  
K: Key Operator

1. Use only when interpreting part numbers. Do not use for developing part numbers.  
2. Custom key removal codes available. Please contact IDEC for details.

## Non-Illuminated Selector Switches (Assembled)

## Non-Illuminated 2-Position Selector Switches

| Style      |          |                                                                                        |                                                                                        |                      | Part Number   |                          |                         |
|------------|----------|----------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------|----------------------|---------------|--------------------------|-------------------------|
| Contact    | Mounting | Operator Position                                                                      |                                                                                        |                      | Maintained    | Spring Return from Right | Spring Return from Left |
|            |          | L<br> | R<br> |                      |               |                          |                         |
| 1NO        | 1        | 0                                                                                      | X                                                                                      | Knob<br>Lever<br>Key | ASD210NU      | ASD2110NU                | ASD2210NU               |
|            | 2        | 0                                                                                      | 0                                                                                      |                      | ASD2L10NU     | ASD21L10NU               | ASD22L10NU              |
|            |          |                                                                                        |                                                                                        |                      | ASD2K10NU     | ASD21K10NU               | ASD22K10NU              |
| 1NC        | 1        | X                                                                                      | 0                                                                                      | Knob<br>Lever<br>Key | ASD201NU      | ASD2101NU                | ASD2201NU               |
|            | 2        | 0                                                                                      | 0                                                                                      |                      | ASD2L01NU     | ASD21L01NU               | ASD22L01NU              |
|            |          |                                                                                        |                                                                                        |                      | ASD2K01NU     | ASD21K01NU               | ASD22K01NU              |
| 1NO<br>1NC | 1        | 0                                                                                      | X                                                                                      | Knob<br>Lever<br>Key | ASD211NU      | ASD2111NU                | ASD2211NU               |
|            | 2        | X                                                                                      | 0                                                                                      |                      | ASD2L11NU     | ASD21L11NU               | ASD22L11NU              |
|            |          |                                                                                        |                                                                                        |                      | ASD2K11NU     | ASD21K11NU               | ASD22K11NU              |
| 2NO        | 1        | 0                                                                                      | X                                                                                      | Knob<br>Lever<br>Key | ASD220NU      | ASD2120NU                | ASD2220NU               |
|            | 2        | 0                                                                                      | X                                                                                      |                      | ASD2L20NU     | ASD21L20NU               | ASD22L20NU              |
|            |          |                                                                                        |                                                                                        |                      | ASD2K20NU     | ASD21K20NU               | ASD22K20NU              |
| 2NC        | 1        | X                                                                                      | 0                                                                                      | Knob<br>Lever<br>Key | ASD202NU      | ASD2102NU                | ASD2202NU               |
|            | 2        | X                                                                                      | 0                                                                                      |                      | ASD2L02NU     | ASD21L02NU               | ASD22L02NU              |
|            |          |                                                                                        |                                                                                        |                      | ASD2K02NU     | ASD21K02NU               | ASD22K02NU              |
| 2NO<br>2NC | 1        | 0                                                                                      | X                                                                                      | Knob<br>Lever<br>Key | ASD222NU      | ASD2122NU                | ASD2222NU               |
|            | 2        | X                                                                                      | 0                                                                                      |                      | ASD2L22NU     | ASD21L22NU               | ASD22L22NU              |
|            | 3        | 0                                                                                      | X                                                                                      |                      | ASD2K22NU     | ASD21K22NU               | ASD22K22NU              |
| 2NO<br>2NC | 1        | 0                                                                                      | X                                                                                      | Knob<br>Lever<br>Key | ASD222NU-111  | ASD2122NU-111            | ASD2222NU-111           |
|            | 2        | 0                                                                                      | X                                                                                      |                      | ASD2L22NU-111 | ASD21L22NU-111           | ASD22L22NU-111          |
|            | 3        | X                                                                                      | 0                                                                                      |                      | ASD2K22NU-111 | ASD21K22NU-111           | ASD22K22NU-111          |
|            | 4        | X                                                                                      | 0                                                                                      |                      |               |                          |                         |



- The truth table indicates the operating position of contact block when the operator is switched to that position.  
X = On (closed contacts) 0 = Off (open contacts)  
X-X = Overlapping Contacts: Remain on (closed contacts) when switch is moved between these two positions.
- All knob and lever selector switches come in black. Other colors are available by ordering the knob or lever separately.
- Custom contact arrangements available, see page 764.

## Non-Illuminated 3-Position Selector Switches

| Contact    |   | Style             |   |   |                      | Part Number   |                          |                         |                       |
|------------|---|-------------------|---|---|----------------------|---------------|--------------------------|-------------------------|-----------------------|
|            |   | Operator Position |   |   |                      | Maintained    | Spring Return from Right | Spring Return from Left | Spring Return Two-Way |
|            |   |                   |   |   |                      |               |                          |                         |                       |
| Mounting   | L | C                 | R |   |                      |               |                          |                         |                       |
| 2NO        | 1 | X                 | 0 | 0 | Knob<br>Lever<br>Key | ASD320NU      | ASD3120NU                | ASD3220NU               | ASD3320NU             |
|            | 2 | 0                 | 0 | X |                      | ASD3L20NU     | ASD31L20NU               | ASD32L20NU              | ASD33L20NU            |
| 2NC        | 1 | 0                 | X | X | Knob<br>Lever<br>Key | ASD302NU      | ASD3102NU                | ASD3202NU               | ASD3302NU             |
|            | 2 | X                 | X | 0 |                      | ASD3L02NU     | ASD31L02NU               | ASD32L02NU              | ASD33L02NU            |
| 2NO<br>2NC | 1 | X                 | 0 | 0 | Knob<br>Lever<br>Key | ASD322NU      | ASD3122NU                | ASD3222NU               | ASD3322NU             |
|            | 2 | 0                 | 0 | X |                      | ASD3L22NU     | ASD31L22NU               | ASD32L22NU              | ASD33L22NU            |
|            | 3 | 0                 | X | X |                      | ASD3K22NU     | ASD31K22NU               | ASD32K22NU              | ASD33K22NU            |
|            | 4 | X                 | X | 0 |                      |               |                          |                         |                       |
| 2NO<br>2NC | 1 | X                 | 0 | X | Knob<br>Lever<br>Key | ASD322NU-309  | ASD3122NU-309            | ASD3222NU-309           | ASD3322NU-309         |
|            | 2 | X                 | X | 0 |                      | ASD3L22NU-309 | ASD31L22NU-309           | ASD32L22NU-309          | ASD33L22NU-309        |
|            | 3 | 0                 | X | 0 |                      | ASD3K22NU-309 | ASD31K22NU-309           | ASD32K22NU-309          | ASD33K22NU-309        |
|            | 4 | 0                 | 0 | X |                      |               |                          |                         |                       |
| 2NO<br>2NC | 1 | 0                 | X | 0 | Knob<br>Lever<br>Key | ASD322NU-310  | ASD3122NU-310            | ASD3222NU-310           | ASD3322NU-310         |
|            | 2 | 0                 | 0 | X |                      | ASD3L22NU-310 | ASD31L22NU-310           | ASD32L22NU-310          | ASD33L22NU-310        |
|            | 3 | 0                 | X | 0 |                      | ASD3K22NU-310 | ASD31K22NU-310           | ASD32K22NU-310          | ASD33K22NU-310        |
|            | 4 | 0                 | 0 | X |                      |               |                          |                         |                       |
| 4NO        | 1 | X                 | 0 | 0 | Knob<br>Lever<br>Key | ASD340NU      | ASD3140NU                | ASD3240NU               | ASD3340NU             |
|            | 2 | 0                 | 0 | X |                      | ASD3L40NU     | ASD31L40NU               | ASD32L40NU              | ASD33L40NU            |
|            | 3 | X                 | 0 | 0 |                      | ASD3K40NU     | ASD31K40NU               | ASD32K40NU              | ASD33K40NU            |
|            | 4 | 0                 | 0 | X |                      |               |                          |                         |                       |
| 4NC        | 1 | 0                 | X | X | Knob<br>Lever<br>Key | ASD304NU      | ASD3104NU                | ASD3204NU               | ASD3304NU             |
|            | 2 | X                 | X | 0 |                      | ASD3L04NU     | ASD31L04NU               | ASD32L04NU              | ASD33L04NU            |
|            | 3 | 0                 | X | X |                      | ASD3K04NU     | ASD31K04NU               | ASD32K04NU              | ASD33K04NU            |
|            | 4 | X                 | X | 0 |                      |               |                          |                         |                       |

## Non-Illuminated Selector Switches (Sub-Assembled)

Contact Blocks + Operator + Knob or Lever\* + Color Insert\* = Complete Part†



- \*Not needed with key type switches.
- †Knob type shown.

### Operators

| Style      | Position | Description                          | Part Number |
|------------|----------|--------------------------------------|-------------|
| Knob/Lever | 2        | Maintained                           | ASD0201T8   |
|            |          | Spring return from right             | ASD0213T8   |
|            |          | Spring return from left              | ASD0224T8   |
|            | 3        | Maintained, Cam 1                    | ASD0302T8   |
|            |          | Maintained, Cam 2                    | ASD0306T8   |
|            |          | Spring return from right, Cam 1      | ASD0314T8   |
|            |          | Spring return from right, Cam 2      | ASD0310T8   |
|            |          | Spring return from left, Cam 1       | ASD0323T8   |
|            |          | Spring return from left, Cam 2       | ASD0328T8   |
|            |          | Spring return from left/right, Cam 1 | ASD0335T8   |
|            |          | Spring return from left/right, Cam 2 | ASD0339T8   |
| Key        | 2        | Maintained                           | ASD0201KT8  |
|            |          | Spring return from right             | ASD0213KT8  |
|            |          | Spring return from left              | ASD0224KT8  |
|            | 3        | Maintained, Cam 1                    | ASD0302KT8  |
|            |          | Maintained, Cam 2                    | ASD0306KT8  |
|            |          | Spring return from right, Cam 1      | ASD0302KT8B |
|            |          | Spring return from right, Cam 2      | ASD0310KT8B |
|            |          | Spring return from left, Cam 1       | ASD0323KT8  |
|            |          | Spring return from left, Cam 2       | ASD0310KT8B |
|            |          | Spring return from left/right, Cam 1 | ASD0335KT8  |
|            |          | Spring return from left/right, Cam 2 | ASD3K339KT8 |



- Order knobs, levers, color inserts separately (see below).
- For key switches, keys are removable in all maintained positions. Other options available, contact IDEC for details.
- See page 766 "Operator Truth Tables" for details of difference between cams.

### ① Color Codes

| Knob/Lever Color | Code |
|------------------|------|
| Black            | B    |
| Blue             | S    |
| Green            | G    |
| Red              | R    |
| Yellow           | Y    |
| White            | W    |



- Knob/Lever not available in white.
- Color inserts not available in Black.
- Lever not available in yellow.

### Handles and Inserts

| Style        | Part Number |
|--------------|-------------|
| Knob         | ASDHHY-①    |
| Lever        | ASDHHL-①*   |
| Color Insert | TW-HC1-①    |



- In place of ①, specify the Color Code.  
\*Not available in yellow.

### Contact Blocks

| Style             |  | Part Number                        |                                    |
|-------------------|--|------------------------------------|------------------------------------|
|                   |  | 1NO                                | 1NC                                |
| All Control Units |  | HW-U10-F<br>HW-U10R-F (early make) | HW-U01-F<br>HW-U01R-F (late break) |
| Dummy Block       |  | HW-DB                              |                                    |



- Dummy blocks (no contacts) are used with an odd number of contact blocks.
- Combining HW-U10R-F and HW-U01R-F result in overlapping contacts (remain on, or closed, when switch is moved between two positions).

## Illuminated Selector Switches (Assembled)



## Assembled Illuminated Selector Switches

A SL D 2 (2) 22 11 DN U - 111 - R

## Function

SL: Illuminated Selector Switch

## Series Designation

D: TWND series

## Number of Positions

2: 2-Position  
3: 3-Position

## Spring Return Action

Blank: Maintained  
1: Spring return from Right  
2: Spring return from Left  
3: Two-Way spring return from Left and Right

## Rated Operational Voltage (Primary)

|                  |                   |
|------------------|-------------------|
| Transformer Type | Full Voltage Type |
| 136: 120V AC     | 66: 6VAC/DC       |
| 256: 240V AC     | 11: 12VAC/DC      |
| 486: 480V AC     | 22: 24VAC/DC      |
|                  | QH2: 120VAC       |
|                  | QM4: 240VAC       |

## Contact Arrangement Code

20: 2NO    02: 2NC  
40: 4NO    04: 4NC  
11: 1NO-1NC    22: 2NO-2NC

## Lens Color Code

A: Amber  
G: Green  
R: Red  
S: Blue  
W: White  
Y: Yellow

## Circuit Code Number

See Circuit # column of Selector Switch Contact Arrangement Charts on page 764.

D: LED Lamp



Use only when interpreting part numbers. Do not use for developing part numbers.

## Illuminated Selector Switches (Assembled)

### Illuminated 2-Position Selector Switches

| Style   |          |                   |   |                          | Part Number        |                          |                         |
|---------|----------|-------------------|---|--------------------------|--------------------|--------------------------|-------------------------|
| Contact | Mounting | Operator Position |   | Lamp Circuit Type        | Maintained         | Spring Return from Right | Spring Return from Left |
|         |          | L                 | R |                          |                    |                          |                         |
| 1NO     | 1        | O                 | X | Transformer Full Voltage | ASLD2 ④11DNU②      | ASLD21 ④11DNU②           | ASLD22 ④11DNU②          |
| 1NC     | 2        | X                 | O | Transformer Full Voltage | ASLD2③11DNU②       | ASLD21③11DNU②            | ASLD22③11DNU②           |
| 2NO     | 1        | O                 | X | Transformer Full Voltage | ASLD2 ④20DNU②      | ASLD21 ④20DNU②           | ASLD22 ④20DNU②          |
|         | 2        | O                 | X | Transformer Full Voltage | ASLD2③20DNU②       | ASLD21③20DNU②            | ASLD22③20DNU②           |
| 2NC     | 1        | X                 | O | Transformer Full Voltage | ASLD2 ④02DNU-②     | ASLD21 ④02DNU-②          | ASLD22 ④02③DNU-②        |
|         | 2        | X                 | O | Transformer Full Voltage | ASLD2③02DNU-104-②  | ASLD21③02DNU-②           | ASLD22③02DNU-②          |
| 2NO     | 1        | O                 | X | Transformer Full Voltage | ASLD2 ④22DNU②      | ASLD21 ④22DNU②           | ASLD22 ④22DNU②          |
| 2NC     | 2        | X                 | O | Transformer Full Voltage | ASLD2③22DNU②       | ASLD21③22DNU②            | ASLD22③22DNU②           |
|         | 3        | O                 | X | Transformer Full Voltage |                    |                          |                         |
|         | 4        | X                 | O | Transformer Full Voltage |                    |                          |                         |
| 2NO     | 1        | O                 | X | Transformer Full Voltage | ASLD2 ④22DNU-111-② | ASLD21 ④22DNU-111-②      | ASLD22 ④22DNU-111-②     |
| 2NC     | 2        | O                 | X | Transformer Full Voltage | ASLD2③22DNU-111-②  | ASLD21③22DNU-111-②       | ASLD22③22DNU-111-②      |
|         | 3        | X                 | O | Transformer Full Voltage |                    |                          |                         |
|         | 4        | X                 | O | Transformer Full Voltage |                    |                          |                         |

### ② Lens Color Codes

| Color  | Code |
|--------|------|
| Amber  | A    |
| Green  | G    |
| Red    | R    |
| Blue   | S    |
| White  | W    |
| Yellow | Y    |

### ③ Full Voltage Codes

| Voltage   | Code |
|-----------|------|
| 6V AC/DC  | 66   |
| 12V AC/DC | 11   |
| 24V AC/DC | 22   |
| 120V AC   | QH2  |
| 240V AC   | QM4  |

### Illuminated 3-Position Selector Switches, Maintained and Spring Return

| Style   |          |                   |   |   | Part Number              |                     |                          |                         |
|---------|----------|-------------------|---|---|--------------------------|---------------------|--------------------------|-------------------------|
| Contact | Mounting | Operator Position |   |   | Lamp Circuit Type        | Maintained          | Spring Return From Right | Spring Return from Left |
|         |          | L                 | C | R |                          |                     |                          |                         |
| 2NO     | 1        | X                 | O | O | Transformer Full Voltage | ASLD3 ④ 20DNU②      | ASLD31 ④ 20DNU②          | ASLD32 ④ 20DNU②         |
|         | 2        | O                 | O | X | Transformer Full Voltage | ASLD3③20DNU②        | ASLD31③20DNU②            | ASLD32③20DNU②           |
| 2NC     | 1        | O                 | X | X | Transformer Full Voltage | ASLD3 ④ 02DNU②      | ASLD31 ④ 02DNU②          | ASLD32 ④ 02DNU②         |
|         | 2        | X                 | X | O | Transformer Full Voltage | ASLD3③02DNU②        | ASLD31③02DNU②            | ASLD32③02DNU②           |
| 2NO     | 1        | X                 | O | O | Transformer Full Voltage | ASLD3 ④ 22DNU②      | ASLD31 ④ 22DNU②          | ASLD32 ④ 22DNU②         |
| 2NC     | 2        | O                 | O | X | Transformer Full Voltage | ASLD3③22DNU②        | ASLD31③22DNU②            | ASLD32③22DNU②           |
|         | 3        | O                 | X | X | Transformer Full Voltage |                     |                          |                         |
|         | 4        | X                 | X | O | Transformer Full Voltage |                     |                          |                         |
| 2NO     | 1        | X                 | O | X | Transformer Full Voltage | ASLD3 ④ 22DNU-309-② | ASLD31 ④ 22DNU-309-②     | ASLD32 ④ 22DNU-309-②    |
| 2NC     | 2        | X                 | X | O | Transformer Full Voltage | ASLD3③22DNU-309-②   | ASLD31③22③DNU-309-②      | ASLD32③22DNU-309-②      |
|         | 3        | O                 | X | O | Transformer Full Voltage |                     |                          |                         |
|         | 4        | O                 | O | X | Transformer Full Voltage |                     |                          |                         |
| 2NO     | 1        | O                 | X | O | Transformer Full Voltage | ASLD3 ④ 22DNU-310-② | ASLD31 ④ 22DNU-310-②     | ASLD32 ④ 22DNU-310-②    |
| 2NC     | 2        | O                 | O | X | Transformer Full Voltage | ASLD3③22DNU-310-②   | ASLD31③22DNU-310-②       | ASLD32③22DNU-310-②      |
|         | 3        | O                 | X | O | Transformer Full Voltage |                     |                          |                         |
|         | 4        | O                 | O | X | Transformer Full Voltage |                     |                          |                         |
| 4NO     | 1        | X                 | O | O | Transformer Full Voltage | ASLD3 ④ 40DNU②      | ASLD31 ④ 40DNU②          | ASLD32 ④ 40DNU②         |
|         | 2        | O                 | O | X | Transformer Full Voltage | ASLD3③40DNU②        | ASLD31③40DNU②            | ASLD32③40DNU②           |
|         | 3        | X                 | O | O | Transformer Full Voltage |                     |                          |                         |
|         | 4        | O                 | O | X | Transformer Full Voltage |                     |                          |                         |
| 4NC     | 1        | O                 | X | X | Transformer Full Voltage | ASLD3 ④ 04DNU②      | ASLD31 ④ 04DNU②          | ASLD32 ④ 04DNU②         |
|         | 2        | X                 | X | O | Transformer Full Voltage | ASLD3③04DNU②        | ASLD31③04DNU②            | ASLD32③04DNU②           |
|         | 3        | O                 | X | X | Transformer Full Voltage |                     |                          |                         |
|         | 4        | X                 | X | O | Transformer Full Voltage |                     |                          |                         |

### ④ Transformer Voltage Codes

| Voltage | Code |
|---------|------|
| 120VAC  | 136  |
| 240VAC  | 256  |
| 480VAC  | 486  |



Transformers step down to 6V (use 6V LED).



- In place of ②, specify the Lens/LED Color Code, in place of ③, specify the Full Voltage (LED voltage) Code, in place of ④, specify the Transformer Voltage Code.
- The truth table indicates the operating position of contact block when the operator is switched to that position.  
X = On (Closed Contacts) O = Off (Open Contacts)  
X—X = Overlapping Contacts: Remain on (closed contacts) when switch is moved between these positions
- Yellow selector switch comes with white LED.

## Illuminated Selector Switches (Sub-Assembled)

|              |   |               |   |          |   |      |   |      |   |               |
|--------------|---|---------------|---|----------|---|------|---|------|---|---------------|
| Transformer* | + | Contact Block | + | Operator | + | Lamp | + | Lens | = | Complete Part |
|--------------|---|---------------|---|----------|---|------|---|------|---|---------------|



\*Not required for full voltage units.

## Operators

| Style                                                                             | Position | Description                          | Part Number |
|-----------------------------------------------------------------------------------|----------|--------------------------------------|-------------|
|  | 2        | Maintained                           | ASLD0201T8  |
|                                                                                   | 3        | Maintained, Cam 1                    | ASLD0302T8  |
|                                                                                   |          | Maintained, Cam 2                    | ASLD0306T8  |
|                                                                                   | 2        | Spring return from right             | ASLD0213T8  |
|                                                                                   |          | Spring return from left              | ASLD0224T8  |
|                                                                                   | 3        | Spring return from right, Cam 1      | ASLD0314T8  |
|                                                                                   |          | Spring return from right, Cam 2      | ASLD0310T8  |
|                                                                                   |          | Spring return from left, Cam 1       | ASLD0323T8  |
|                                                                                   |          | Spring return from left, Cam 2       | ASLD0328T8  |
|                                                                                   |          | Spring return from left/right, Cam 1 | ASLD0335T8  |
|                                                                                   |          | Spring return from left/right, Cam 2 | ASLD0339T8  |

## Lenses

| Style | Part Number |
|-------|-------------|
| Knob  | ASLNHU-③ ②  |

## Lamps

| Style                                                                               | Voltage   | Part Number |
|-------------------------------------------------------------------------------------|-----------|-------------|
|  | 6V AC/DC  | LSTD-6③     |
|                                                                                     | 12V AC/DC | LSTD-1③     |
|                                                                                     | 24V AC/DC | LSTD-2③     |
|                                                                                     | 120V AC   | LSTD-H2③    |
|                                                                                     | 240V AC   | LSTD-M4③    |



1. In place of ②, specify the LED color code.
2. The LED contains a current-limiting resistor and a protection diode.

## Contact Blocks

| Style             |                                                                                     | Part Number            |                        |
|-------------------|-------------------------------------------------------------------------------------|------------------------|------------------------|
|                   |                                                                                     | 1NO                    | 1NC                    |
| All Control Units |  | HW-U10-F               | HW-U10-F               |
|                   |                                                                                     | HW-U10R-F (early make) | HW-U10R-F (late break) |
| Dummy Block       |  | HW-DB                  |                        |



1. Dummy blocks (no contacts) are used with an odd number of contact blocks.
2. Combining HW-U10R-F and HW-U01R-F result in overlapping contacts (remain on, or closed, when switch is moved between two positions).

## Lamp Circuit Components

| Style            | Application                                                   | Part Number |
|------------------|---------------------------------------------------------------|-------------|
| Long Lamp Holder | <b>Used with</b> Full-size Transformer and two contact blocks | TW-LH2      |
| Lead Holder      | <b>Used with</b> Full Voltage Adaptor and two contact blocks  |             |
|                  | <b>Used with</b> TW-LH2 holder when using four contact blocks | HW-LH3      |

## Full Voltage Modules

| Style                                 | Description                           | Part Number              |
|---------------------------------------|---------------------------------------|--------------------------|
| Dummy Block with Full Voltage Adaptor | For use with odd number of contacts.  | Finger-Safe<br>HW-DA1FBN |
| Full Voltage Adaptor                  | For use with even number of contacts. | Finger-Safe<br>TW-DA1FB  |



All Transformers step down to 6V (use 6V lamp).

## Transformers

| Style                                                                                | Primary Voltage (50/60Hz) | Part Number |
|--------------------------------------------------------------------------------------|---------------------------|-------------|
|  | 120V AC                   | TW-F126B    |
|                                                                                      | 240V AC                   | TW-F126B    |
|                                                                                      | 480V AC                   | HW-L486     |



6V secondary voltage.

## ② Lens Color Codes

| Color  | Code |
|--------|------|
| Amber  | A    |
| Green  | G    |
| Red    | R    |
| Blue   | S    |
| White  | W    |
| Yellow | Y    |

## ③ LED Color Codes

| Color | Code |
|-------|------|
| Amber | A    |
| Green | G    |
| Red   | R    |
| Blue  | S    |
| White | W    |



Yellow lens only. Yellow LED not available, use white LED.

## Contact Arrangement Charts

### How to Read Contact Arrangement Charts

To determine contact block mounting position, first make sure the selector switch is oriented as shown on the right

#### Contact Arrangement

Type and quantity of switch contacts

#### Circuit Number

\* N/D = No designation


#### Contact Block Mounting Position

Position or mounting contact blocks on operator

#### Operator Position

Truth table indicates the operating position of contact block when operator is switched to that position.

X = On (Closed Contacts)  
O = Off (Open Contacts)  
X-X = Overlapping Contacts: Remain on (closed) when switch is moved between these two positions



#### Contact Block Part Number

Part number to use when ordering sub-assembly contact blocks, as required for use with corresponding mounting position

### Contact Arrangement Chart: 2-Position Selector Switches

| Style            |                | Mounting Position | Operator Position                                                                      |                                                                                        | Contact Block Part Number | Description      | Operator Part Number                                                              |                                                                                   |                                                                                   |
|------------------|----------------|-------------------|----------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------|---------------------------|------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|
| Contact          | Circuit Number |                   | L<br> | R<br> |                           |                  | Maintained                                                                        | Spring Return from Right                                                          | Spring Return from Left                                                           |
|                  |                |                   |                                                                                        |                                                                                        |                           |                  |  |  |  |
| 1NO              | N/D            | 1                 | O                                                                                      | X                                                                                      | HW-U10-F                  | Knob/Lever Key   | ASD0201T8<br>ASD0201KT8<br>ASLD0201T8                                             | ASD0213T8<br>ASD0213KT8<br>ASLD0213T8                                             | ASD0224T8<br>ASD0224KT8<br>ASLD0224T8                                             |
|                  |                | 2                 | O                                                                                      | O                                                                                      | HW-DB                     | Illuminated Knob |                                                                                   |                                                                                   |                                                                                   |
| 1NC              | N/D            | 1                 | X                                                                                      | O                                                                                      | HW-U01-F                  | Knob/Lever Key   | ASD0201T8<br>ASD0201KT8<br>ASLD0201T8                                             | ASD0213T8<br>ASD0213KT8<br>ASLD0213T8                                             | ASD0224T8<br>ASD0224KT8<br>ASLD0224T8                                             |
|                  |                | 2                 | O                                                                                      | O                                                                                      | HW-DB                     | Illuminated Knob |                                                                                   |                                                                                   |                                                                                   |
| 1NO<br>1NC       | N/D            | 1                 | O                                                                                      | X                                                                                      | HW-U10-F                  | Knob/Lever Key   | ASD0201T8<br>ASD0201KT8<br>ASLD0201T8                                             | ASD0213T8<br>ASD0213KT8<br>ASLD0213T8                                             | ASD0224T8<br>ASD0224KT8<br>ASLD0224T8                                             |
|                  |                | 2                 | X                                                                                      | O                                                                                      | HW-U01-F                  | Illuminated Knob |                                                                                   |                                                                                   |                                                                                   |
|                  | 103            | 1                 | X                                                                                      | O                                                                                      | HW-U01-F                  | Knob/Lever Key   | ASD0201T8<br>ASD0201KT8<br>ASLD0201T8                                             | ASD0213T8<br>ASD0213KT8<br>ASLD0213T8                                             | ASD0224T8<br>ASD0224KT8<br>ASLD0224T8                                             |
|                  |                | 2                 | O                                                                                      | X                                                                                      | HW-U10-F                  | Illuminated Knob |                                                                                   |                                                                                   |                                                                                   |
| 1NO-EM<br>1NC-LB | 600            | 1                 | O                                                                                      | X                                                                                      | HW-U10R-F                 | Knob/Lever Key   | ASD0201T8<br>ASD0201KT8<br>ASLD0201T8                                             | ASD0213T8<br>ASD0213KT8<br>ASLD0213T8                                             | ASD0224T8<br>ASD0224KT8<br>ASLD0224T8                                             |
|                  |                | 2                 | X                                                                                      | O                                                                                      | HW-U01R-F                 | Illuminated Knob |                                                                                   |                                                                                   |                                                                                   |
|                  | 601            | 1                 | X                                                                                      | O                                                                                      | HW-U01R-F                 | Knob/Lever Key   | ASD0201T8<br>ASD0201KT8<br>ASLD0201T8                                             | ASD0213T8<br>ASD0213KT8<br>ASLD0213T8                                             | ASD0224T8<br>ASD0224KT8<br>ASLD0224T8                                             |
|                  |                | 2                 | O                                                                                      | X                                                                                      | HW-U10R-F                 | Illuminated Knob |                                                                                   |                                                                                   |                                                                                   |
| 2NO              | N/D            | 1                 | O                                                                                      | X                                                                                      | HW-U10-F                  | Knob/Lever Key   | ASD0201T8<br>ASD0201KT8<br>ASLD0201T8                                             | ASD0213T8<br>ASD0213KT8<br>ASLD0213T8                                             | ASD0224T8<br>ASD0224KT8<br>ASLD0224T8                                             |
|                  |                | 2                 | O                                                                                      | X                                                                                      | HW-U10-F                  | Illuminated Knob |                                                                                   |                                                                                   |                                                                                   |
| 2NC              | N/D            | 1                 | X                                                                                      | O                                                                                      | HW-U01-F                  | Knob/Lever Key   | ASD0201T8<br>ASD0201KT8<br>ASLD0201T8                                             | ASD0213T8<br>ASD0213KT8<br>ASLD0213T8                                             | ASD0224T8<br>ASD0224KT8<br>ASLD0224T8                                             |
|                  |                | 2                 | X                                                                                      | O                                                                                      | HW-U01-F                  | Illuminated Knob |                                                                                   |                                                                                   |                                                                                   |
| 2NO<br>2NC       | N/D            | 1                 | O                                                                                      | X                                                                                      | HW-U10-F                  | Knob/Lever Key   | ASD0201T8<br>ASD0201KT8<br>ASLD0201T8                                             | ASD0213T8<br>ASD0213KT8<br>ASLD0213T8                                             | ASD0224T8<br>ASD0224KT8<br>ASLD0224T8                                             |
|                  |                | 2                 | X                                                                                      | O                                                                                      | HW-U01-F                  | Illuminated Knob |                                                                                   |                                                                                   |                                                                                   |
|                  |                | 3                 | O                                                                                      | X                                                                                      | HW-U10-F                  | Illuminated Knob |                                                                                   |                                                                                   |                                                                                   |
|                  |                | 4                 | X                                                                                      | O                                                                                      | HW-U01-F                  | Illuminated Knob |                                                                                   |                                                                                   |                                                                                   |
|                  | 110            | 1                 | X                                                                                      | O                                                                                      | HW-U01-F                  | Knob/Lever Key   | ASD0201T8<br>ASD0201KT8<br>ASLD0201T8                                             | ASD0213T8<br>ASD0213KT8<br>ASLD0213T8                                             | ASD0224T8<br>ASD0224KT8<br>ASLD0224T8                                             |
|                  |                | 2                 | O                                                                                      | X                                                                                      | HW-U10-F                  | Illuminated Knob |                                                                                   |                                                                                   |                                                                                   |
|                  |                | 3                 | X                                                                                      | O                                                                                      | HW-U01-F                  | Illuminated Knob |                                                                                   |                                                                                   |                                                                                   |
|                  |                | 4                 | O                                                                                      | X                                                                                      | HW-U10-F                  | Illuminated Knob |                                                                                   |                                                                                   |                                                                                   |
|                  | 111            | 1                 | O                                                                                      | X                                                                                      | HW-U10-F                  | Knob/Lever Key   | ASD0201T8<br>ASD0201KT8<br>ASLD0201T8                                             | ASD0213T8<br>ASD0213KT8<br>ASLD0213T8                                             | ASD0224T8<br>ASD0224KT8<br>ASLD0224T8                                             |
|                  |                | 2                 | O                                                                                      | X                                                                                      | HW-U10-F                  | Illuminated Knob |                                                                                   |                                                                                   |                                                                                   |
|                  |                | 3                 | X                                                                                      | O                                                                                      | HW-U01-F                  | Illuminated Knob |                                                                                   |                                                                                   |                                                                                   |
|                  |                | 4                 | X                                                                                      | O                                                                                      | HW-U01-F                  | Illuminated Knob |                                                                                   |                                                                                   |                                                                                   |
| 4NO              | N/D            | 1                 | O                                                                                      | X                                                                                      | HW-U10-F                  | Knob/Lever Key   | ASD0201T8<br>ASD0201KT8<br>ASLD0201T8                                             | ASD0213T8<br>ASD0213KT8<br>ASLD0213T8                                             | ASD0224T8<br>ASD0224KT8<br>ASLD0224T8                                             |
|                  |                | 2                 | O                                                                                      | X                                                                                      | HW-U10-F                  | Illuminated Knob |                                                                                   |                                                                                   |                                                                                   |
|                  |                | 3                 | O                                                                                      | X                                                                                      | HW-U10-F                  | Illuminated Knob |                                                                                   |                                                                                   |                                                                                   |
|                  |                | 4                 | O                                                                                      | X                                                                                      | HW-U10-F                  | Illuminated Knob |                                                                                   |                                                                                   |                                                                                   |

Contact Arrangement Chart: 3-Position Selector Switches

| Style      |                | Mounting Position | Operator Position                                                                      |                                                                                        |                                                                                        | Contact Block Part Number          | Description                           | Operator Part Number                                                              |                                                                                   |                                                                                   |                                                                                   |
|------------|----------------|-------------------|----------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------|------------------------------------|---------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|
| Contact    | Circuit Number |                   | L<br> | C<br> | R<br> |                                    |                                       | Maintained                                                                        | Spring Return from Right                                                          | Spring Return from Left                                                           | Two-Way                                                                           |
|            |                |                   |                                                                                        |                                                                                        |                                                                                        |                                    |                                       |  |  |  |  |
| 1NO<br>1NC | 202            | 1                 | X                                                                                      | O                                                                                      | O                                                                                      | HW-U10-F                           | Knob/Lever Key                        | ASD0302T8<br>ASD0302KT8<br>ASLD0302T8                                             | ASD0314T8<br>ASD0314KT8<br>ASLD0314T8                                             | ASD0323T8<br>ASD0323KT8<br>ASLD0323T8                                             | ASD0335T8<br>ASD0335KT8<br>ASLD0335T8                                             |
|            |                | 2                 | X                                                                                      | X                                                                                      | O                                                                                      | HW-U01-F                           | Illuminated Knob                      |                                                                                   |                                                                                   |                                                                                   |                                                                                   |
|            | 203            | 1                 | O                                                                                      | X                                                                                      | X                                                                                      | HW-U01-F                           | Knob/Lever Key                        | ASD0302T8<br>ASD0302KT8<br>ASLD0302T8                                             | ASD0314T8<br>ASD0314KT8<br>ASLD0314T8                                             | ASD0323T8<br>ASD0323KT8<br>ASLD0323T8                                             | ASD0335T8<br>ASD0335KT8<br>ASLD0335T8                                             |
|            |                | 2                 | O                                                                                      | O                                                                                      | X                                                                                      | HW-U10-F                           | Illuminated Knob                      |                                                                                   |                                                                                   |                                                                                   |                                                                                   |
|            | 302            | 1                 | X                                                                                      | O                                                                                      | X                                                                                      | HW-U10-F                           | Knob/Lever Key                        | ASD0306T8<br>ASD0306KT8<br>ASLD0306T8                                             | ASD0310T8<br>ASD0301KT8<br>ASLD0310T8                                             | ASD0328T8<br>ASD0328KT8<br>ASLD0328T8                                             | ASD0339T8<br>ASD0339KT8<br>ASLD0339T8                                             |
|            |                | 2                 | X                                                                                      | X                                                                                      | O                                                                                      | HW-U01-F                           | Illuminated Knob                      |                                                                                   |                                                                                   |                                                                                   |                                                                                   |
|            | 303            | 1                 | O                                                                                      | X                                                                                      | O                                                                                      | HW-U01-F                           | Knob/Lever Key                        | ASD0306T8<br>ASD0306KT8<br>ASLD0306T8                                             | ASD0310T8<br>ASD0301KT8<br>ASLD0310T8                                             | ASD0328T8<br>ASD0328KT8<br>ASLD0323T8                                             | ASD0339T8<br>ASD0339KT8<br>ASLD0339T8                                             |
|            |                | 2                 | O                                                                                      | O                                                                                      | X                                                                                      | HW-U10-F                           | Illuminated Knob                      |                                                                                   |                                                                                   |                                                                                   |                                                                                   |
| 2NO        | N/D            | 1                 | X                                                                                      | O                                                                                      | O                                                                                      | HW-U10-F                           | Knob/Lever Key                        | ASD0302T8<br>ASD0302KT8<br>ASLD0302T8                                             | ASD0314T8<br>ASD0314KT8<br>ASLD0314T8                                             | ASD0323T8<br>ASD0323KT8<br>ASLD0323T8                                             | ASD0335T8<br>ASD0335KT8<br>ASLD0335T8                                             |
|            |                | 2                 | O                                                                                      | O                                                                                      | X                                                                                      | HW-U10-F                           | Illuminated Knob                      |                                                                                   |                                                                                   |                                                                                   |                                                                                   |
|            | 301            | 1                 | X                                                                                      | O                                                                                      | X                                                                                      | HW-U10-F                           | Knob/Lever Key                        | ASD0306T8<br>ASD0306KT8<br>ASLD0306T8                                             | ASD0310T8<br>ASD0301KT8<br>ASLD0310T8                                             | ASD0328T8<br>ASD0328KT8<br>ASLD0328T8                                             | ASD0339T8<br>ASD0339KT8<br>ASLD0339T8                                             |
|            |                | 2                 | O                                                                                      | O                                                                                      | X                                                                                      | HW-U10-F                           | Illuminated Knob                      |                                                                                   |                                                                                   |                                                                                   |                                                                                   |
| 2NC        | 304            | 1                 | O                                                                                      | X                                                                                      | O                                                                                      | HW-U01-F                           | Knob/Lever Key                        | ASD0306T8<br>ASD0306KT8<br>ASLD0306T8                                             | ASD0310T8<br>ASD0301KT8<br>ASLD0310T8                                             | ASD0328T8<br>ASD0328KT8<br>ASLD0328T8                                             | ASD0339T8<br>ASD0339KT8<br>ASLD0339T8                                             |
|            |                | 2                 | X                                                                                      | X                                                                                      | O                                                                                      | HW-U01-F                           | Illuminated Knob                      |                                                                                   |                                                                                   |                                                                                   |                                                                                   |
|            | N/D            | 1                 | O                                                                                      | X                                                                                      | X                                                                                      | HW-U01-F                           | Knob/Lever Key                        | ASD0302T8<br>ASD0302KT8<br>ASLD0302T8                                             | ASD0314T8<br>ASD0314KT8<br>ASLD0314T8                                             | ASD0323T8<br>ASD0323KT8<br>ASLD0323T8                                             | ASD0335T8<br>ASD0335KT8<br>ASLD0335T8                                             |
|            |                | 2                 | X                                                                                      | X                                                                                      | O                                                                                      | HW-U01-F                           | Illuminated Knob                      |                                                                                   |                                                                                   |                                                                                   |                                                                                   |
| 2NO<br>2NC | N/D            | 1                 | X                                                                                      | O                                                                                      | O                                                                                      | HW-U10-F                           | Knob/Lever Key<br>Illuminated Knob    | ASD0302T8<br>ASD0302KT8<br>ASLD0302T8                                             | ASD0314T8<br>ASD0314KT8<br>ASLD0314T8                                             | ASD0323T8<br>ASD0323KT8<br>ASLD0323T8                                             | ASD0335T8<br>ASD0335KT8<br>ASLD0335T8                                             |
|            |                | 2                 | O                                                                                      | O                                                                                      | X                                                                                      | HW-U10-F                           |                                       |                                                                                   |                                                                                   |                                                                                   |                                                                                   |
|            |                | 3                 | O                                                                                      | X                                                                                      | X                                                                                      | HW-U01-F                           |                                       |                                                                                   |                                                                                   |                                                                                   |                                                                                   |
|            |                | 4                 | X                                                                                      | X                                                                                      | O                                                                                      | HW-U01-F                           |                                       |                                                                                   |                                                                                   |                                                                                   |                                                                                   |
|            | 210            | 1                 | O                                                                                      | X                                                                                      | X                                                                                      | HW-U01-F                           | Knob/Lever Key<br>Illuminated Knob    | ASD0302T8<br>ASD0302KT8<br>ASLD0302T8                                             | ASD0314T8<br>ASD0314KT8<br>ASLD0314T8                                             | ASD0323T8<br>ASD0323KT8<br>ASLD0323T8                                             | ASD0335T8<br>ASD0335KT8<br>ASLD0335T8                                             |
|            |                | 2                 | O                                                                                      | O                                                                                      | X                                                                                      | HW-U10-F                           |                                       |                                                                                   |                                                                                   |                                                                                   |                                                                                   |
|            |                | 3                 | O                                                                                      | X                                                                                      | X                                                                                      | HW-U01-F                           |                                       |                                                                                   |                                                                                   |                                                                                   |                                                                                   |
|            |                | 4                 | O                                                                                      | O                                                                                      | X                                                                                      | HW-U10-F                           |                                       |                                                                                   |                                                                                   |                                                                                   |                                                                                   |
|            | 308            | 1                 | X                                                                                      | O                                                                                      | X                                                                                      | HW-U10-F                           | Knob/Lever Key<br>Illuminated Knob    | ASD0306T8<br>ASD0306KT8<br>ASLD0306T8                                             | ASD0310T8<br>ASD0301KT8<br>ASLD0310T8                                             | ASD0328T8<br>ASD0328KT8<br>ASLD0328T8                                             | ASD0339T8<br>ASD0339KT8<br>ASLD0339T8                                             |
|            |                | 2                 | X                                                                                      | X                                                                                      | O                                                                                      | HW-U01-F                           |                                       |                                                                                   |                                                                                   |                                                                                   |                                                                                   |
|            |                | 3                 | X                                                                                      | O                                                                                      | X                                                                                      | HW-U10-F                           |                                       |                                                                                   |                                                                                   |                                                                                   |                                                                                   |
|            |                | 4                 | X                                                                                      | X                                                                                      | O                                                                                      | HW-U01-F                           |                                       |                                                                                   |                                                                                   |                                                                                   |                                                                                   |
|            | 309            | 1                 | X                                                                                      | O                                                                                      | X                                                                                      | HW-U10-F                           | Knob/Lever Key<br>Illuminated Knob    | ASD0306T8<br>ASD0306KT8<br>ASLD0306T8                                             | ASD0310T8<br>ASD0301KT8<br>ASLD0310T8                                             | ASD0328T8<br>ASD0328KT8<br>ASLD0328T8                                             | ASD0339T8<br>ASD0339KT8<br>ASLD0339T8                                             |
|            |                | 2                 | X                                                                                      | X                                                                                      | O                                                                                      | HW-U01-F                           |                                       |                                                                                   |                                                                                   |                                                                                   |                                                                                   |
|            |                | 3                 | O                                                                                      | X                                                                                      | O                                                                                      | HW-U01-F                           |                                       |                                                                                   |                                                                                   |                                                                                   |                                                                                   |
|            |                | 4                 | O                                                                                      | O                                                                                      | X                                                                                      | HW-U10-F                           |                                       |                                                                                   |                                                                                   |                                                                                   |                                                                                   |
| 310        | 1              | O                 | X                                                                                      | O                                                                                      | HW-U01-F                                                                               | Knob/Lever Key<br>Illuminated Knob | ASD0306T8<br>ASD0306KT8<br>ASLD0306T8 | ASD0310T8<br>ASD0301KT8<br>ASLD0310T8                                             | ASD0328T8<br>ASD0328KT8<br>ASLD0328T8                                             | ASD0339T8<br>ASD0339KT8<br>ASLD0339T8                                             |                                                                                   |
|            | 2              | O                 | O                                                                                      | X                                                                                      | HW-U10-F                                                                               |                                    |                                       |                                                                                   |                                                                                   |                                                                                   |                                                                                   |
|            | 3              | O                 | X                                                                                      | O                                                                                      | HW-U01-F                                                                               |                                    |                                       |                                                                                   |                                                                                   |                                                                                   |                                                                                   |
|            | 4              | O                 | O                                                                                      | X                                                                                      | HW-U10-F                                                                               |                                    |                                       |                                                                                   |                                                                                   |                                                                                   |                                                                                   |

1. Each operator sub-assembly is available as an "02" and an "06" for 3-position selector switches. The internal cam of an "02" is different from that of an "06". This results in designated combinations of open and closed contacts in the various operator positions.
2. N/D = No circuit number designation required in assembled part number.
3. X = On (closed contacts) O = Off (open contacts). X-X Overlapping contacts remain on (closed) when switch is moved between these two positions.

### Contact Arrangement Chart: 3-Position Selector Switches

| Style   |                | Mounting Position | Operator Position                                                                      |                                                                                        |                                                                                        | Contact Block Part Number | Description                        | Operator Part Number                                                               |                                                                                     |                                                                                     |                                                                                     |
|---------|----------------|-------------------|----------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------|---------------------------|------------------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| Contact | Circuit Number |                   | L<br> | C<br> | R<br> |                           |                                    | Maintained                                                                         | Spring Return from Right                                                            | Spring Return from Left                                                             | Two-Way                                                                             |
|         |                |                   |                                                                                        |                                                                                        |                                                                                        |                           |                                    |  |  |  |  |
| 4NO     | N/D            | 1                 | X                                                                                      | O                                                                                      | O                                                                                      | HW-U10-F                  | Knob/Lever Key<br>Illuminated Knob | ASD0302T8                                                                          | ASD0314T8                                                                           | ASD0323T8                                                                           | ASD0335T8                                                                           |
|         |                | 2                 | O                                                                                      | O                                                                                      | X                                                                                      | HW-U10-F                  |                                    | ASD0302KT8                                                                         | ASD0314KT8                                                                          | ASD0323KT8                                                                          | ASD0335KT8                                                                          |
|         |                | 3                 | X                                                                                      | O                                                                                      | O                                                                                      | HW-U10-F                  |                                    | ASLD0302T8                                                                         | ASLD0314T8                                                                          | ASLD0323T8                                                                          | ASD0335T8                                                                           |
|         |                | 4                 | O                                                                                      | O                                                                                      | X                                                                                      | HW-U10-F                  |                                    |                                                                                    |                                                                                     |                                                                                     |                                                                                     |
|         | 305            | 1                 | X                                                                                      | O                                                                                      | X                                                                                      | HW-U10-F                  | Knob/Lever Key<br>Illuminated Knob | ASD0306T8                                                                          | ASD0310T8                                                                           | ASD0328T8                                                                           | ASD0339T8                                                                           |
|         |                | 2                 | O                                                                                      | O                                                                                      | X                                                                                      | HW-U10-F                  |                                    | ASD0306KT8                                                                         | ASD0301KT8                                                                          | ASD0328KT8                                                                          | ASD0339KT8                                                                          |
|         |                | 3                 | X                                                                                      | O                                                                                      | X                                                                                      | HW-U10-F                  |                                    | ASLD0306T8                                                                         | ASLD0310T8                                                                          | ASLD0328T8                                                                          | ASLD0339T8                                                                          |
|         |                | 4                 | O                                                                                      | O                                                                                      | X                                                                                      | HW-U10-F                  |                                    |                                                                                    |                                                                                     |                                                                                     |                                                                                     |
| 4NC     | N/D            | 1                 | O                                                                                      | X                                                                                      | X                                                                                      | HW-U01-F                  | Knob/Lever Key<br>Illuminated Knob | ASD0302T8                                                                          | ASD0314T8                                                                           | ASD0323T8                                                                           | ASD0335T8                                                                           |
|         |                | 2                 | X                                                                                      | X                                                                                      | O                                                                                      | HW-U01-F                  |                                    | ASD0302KT8                                                                         | ASD0314KT8                                                                          | ASD0323KT8                                                                          | ASD0335T8                                                                           |
|         |                | 3                 | O                                                                                      | X                                                                                      | X                                                                                      | HW-U01-F                  |                                    | ASLD0302T8                                                                         | ASLD0314T8                                                                          | ASLD0323T8                                                                          | ASD0335T8                                                                           |
|         |                | 4                 | X                                                                                      | X                                                                                      | O                                                                                      | HW-U01-F                  |                                    |                                                                                    |                                                                                     |                                                                                     |                                                                                     |
|         | 314            | 1                 | O                                                                                      | X                                                                                      | O                                                                                      | HW-U01-F                  | Knob/Lever Key<br>Illuminated Knob | ASD0306T8                                                                          | ASD0310T8                                                                           | ASD0328T8                                                                           | ASLD0339T8                                                                          |
|         |                | 2                 | X                                                                                      | X                                                                                      | O                                                                                      | HW-U01-F                  |                                    | ASD0306KT8                                                                         | ASD0301KT8                                                                          | ASD0328KT8                                                                          | ASD0339KT8                                                                          |
|         |                | 3                 | O                                                                                      | X                                                                                      | O                                                                                      | HW-U01-F                  |                                    | ASLD0306T8                                                                         | ASLD0301T8                                                                          | ASLD0328T8                                                                          | ASLD0339T8                                                                          |
|         |                | 4                 | X                                                                                      | X                                                                                      | O                                                                                      | HW-U01-F                  |                                    |                                                                                    |                                                                                     |                                                                                     |                                                                                     |

- Each operator sub-assembly is available as an "02" and an "06" for 3-position selector switches. The internal cam of an "02" is different from that of an "06". This results in designated combinations of open and closed contacts in the various operator positions.
- N/D = No circuit number designation required in assembled part number.
- X = On (closed contacts) O = Off (open contacts). X—X Overlapping contacts remain on (closed) when switch is moved between these two positions.

### Operator Truth Tables

Use the following tables to build custom selector switches.

#### 2 Position Selector Switches

|            | Contact           | Mounting Position | Operator Position |       |
|------------|-------------------|-------------------|-------------------|-------|
|            |                   |                   | Left              | Right |
| ASLD0201T8 | HW-U10-F (NO)     | L                 | O                 | X     |
|            |                   | R                 | O                 | X     |
|            | HW-U01-F (NC)     | L                 | X                 | O     |
|            |                   | R                 | X                 | O     |
|            | HW-U10R-F (NO-EM) | L                 | O                 | X—    |
|            |                   | R                 | O                 | X—    |
|            | HW-U01R-F (NC-LB) | L                 | X—                | O     |
|            |                   | R                 | X—                | O     |

#### 3 Position Selector Switches

|                                       | Contact           | Mounting Position | Operator Position |        |       |
|---------------------------------------|-------------------|-------------------|-------------------|--------|-------|
|                                       |                   |                   | Left              | Center | Right |
| ASD0302T8<br>ASLD0302T8<br>ASD0302KT8 | HW-U10-F (NO)     | L                 | X                 | O      | O     |
|                                       |                   | R                 | O                 | O      | X     |
|                                       | HW-U01-F (NC)     | L                 | O                 | X—X    |       |
|                                       |                   | R                 | X—X               | O      |       |
|                                       | HW-U10R-F (NO-EM) | L                 | X—                | O      | O     |
|                                       |                   | R                 | O                 | O      | X     |
|                                       | HW-U10R-F (NC-LB) | L                 | O                 | X—X    |       |
|                                       |                   | R                 | X—X               | O      |       |

|                                       | Contact           | Mounting Position | Operator Position |        |       |
|---------------------------------------|-------------------|-------------------|-------------------|--------|-------|
|                                       |                   |                   | Left              | Center | Right |
| ASD0306T8<br>ASLD0306T8<br>ASD0306KT8 | HW-U10-F (NO)     | L                 | X                 | O      | X     |
|                                       |                   | R                 | O                 | O      | X     |
|                                       | HW-U01-F (NC)     | L                 | O                 | X      | O     |
|                                       |                   | R                 | X—X               | O      |       |
|                                       | HW-U10R-F (NO-EM) | L                 | X—                | O      | X—    |
|                                       |                   | R                 | O                 | O      | X     |
|                                       | HW-U01R-F (NC-LB) | L                 | O                 | X—     | O     |
|                                       |                   | R                 | X—X               | O      |       |

## Accessories — TWND Series

| Item                 | Appearance                                                                          | Description/Usage                                                                                                                      |                                                                                                                                    | Part Number |
|----------------------|-------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------|-------------|
| Lamp Removal Tool    |    | Rubber tool used to install or remove LED's                                                                                            |                                                                                                                                    | OR-55       |
| Metal Bezel          |    | Replacement locking ring/bezel                                                                                                         | Standard octagonal units (chrome-pl.).                                                                                             | OG-81       |
|                      |                                                                                     |                                                                                                                                        | Extended, non-illuminated (chrome-pl.).                                                                                            | OG-82       |
|                      |                                                                                     |                                                                                                                                        | Extended, illuminated (chrome-pl.).                                                                                                | OG-83L      |
|                      |                                                                                     |                                                                                                                                        | Jumbo Mushroom Shallow Shroud                                                                                                      | ABN4G       |
|                      |                                                                                     |                                                                                                                                        | Jumbo Mushroom Deep Shroud                                                                                                         | ABN4F       |
| Plastic Bezel        |    | Black plastic locking ring/bezel                                                                                                       |                                                                                                                                    | OGP11B      |
| Boot/Cover           |    | Used to cover and protect pushbuttons                                                                                                  | In place of ①, specify <b>Neoprene Rubber Boot</b> color:<br><b>B</b> (black), <b>G</b> (green), <b>R</b> (red), <b>Y</b> (yellow) | OC-11 ①     |
|                      |                                                                                     |                                                                                                                                        | Flush units (clear plastic -40° to +60°C).                                                                                         | OC-121      |
|                      |                                                                                     |                                                                                                                                        | Extended units (clear plastic -40° to +60°C).                                                                                      | OC-122      |
| Anti-Rotation Ring   |   | Plastic washer<br>For nameplates or panels that should not be scratched.                                                               |                                                                                                                                    | OGL-D1T     |
|                      |                                                                                     | Thrust washer/Anti-rotation ring for use with notched panel cutout.                                                                    |                                                                                                                                    | OGL-D1S     |
| Mounting Hole Plug   |  | Plugs used to fill unused 30mm panel cutouts.                                                                                          | Plastic with locking nut attached.                                                                                                 | OBP-11      |
|                      |                                                                                     |                                                                                                                                        | Metal with locking nut attached                                                                                                    | OB-11       |
|                      |                                                                                     |                                                                                                                                        | Grey rubber (-5° to +60°C)                                                                                                         | OB-13       |
| Terminal Tab Adaptor |  | Tab #250 17/64" x 3/64" (6.35mm x 0.8mm): Single tab                                                                                   |                                                                                                                                    | TW-FA4      |
| Long Lamp Holder     |  | <b>Used with</b> Transformer and two contact blocks<br><b>Used with</b> Full Voltage Adaptor and two contact blocks                    |                                                                                                                                    | TW-LH2      |
| Lead Holder          |  | <b>Used with</b> TW-LH2 holder when using four contact blocks                                                                          |                                                                                                                                    | HW-LH3      |
| Lock Out Adaptor     |  | Used to provide lockout protection for TWTD pushbuttons and knob selectors.<br>ø 1-13/64" (30mm)                                       |                                                                                                                                    | OL-KL1      |
| Full Voltage Clips   |  | Primary Voltage (50/60Hz) Required for all full voltage pilot lights. Two pieces each. 2 clips required for full voltage pilot lights. |                                                                                                                                    | APD-F       |
| Replacement Keys     |  | Pair of keys (#0)                                                                                                                      |                                                                                                                                    | TW-SK       |

Switches &amp; Pilot Devices

Signaling Lights

Relays &amp; Sockets



Timers

Contactors

Terminal Blocks

Circuit Breakers

### Accessories TWND Series continued




| Item                                   | Appearance                                                                        | Description/Usage                                                                                                              | Part Number                                                               |                                                                           |
|----------------------------------------|-----------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------|---------------------------------------------------------------------------|
|                                        |                                                                                   |                                                                                                                                | 1NC                                                                       | 1NO                                                                       |
| Contact Blocks<br>(with side entry)    |  | These contacts are applicable for wires terminated by ring, fork, terminals, <b>not recommended for bare wire connections.</b> | HW-U01<br>HW-U01-MAU<br>HW-U01R<br>HW-U01R-MAU<br>(with side entry)       | HW-U10<br>HW-U10-MAU<br>HW-U10R<br>HW-U10R-MAU<br>(with side entry)       |
| Contact Blocks<br>(without side entry) |  | These contacts are applicable for wires terminated by ring, fork, or ferule terminals, and <b>also bare wire connections.</b>  | HW-U01-F<br>HW-U01-MAU-F<br>HW-U01R-F<br>HW-U01R-MAU-F<br>(no side entry) | HW-U10-F<br>HW-U10-MAU-F<br>HW-U10R-F<br>HW-U10R-MAU-F<br>(no side entry) |

### Fingersafe Covers for TWND Series

| Item                                                                               | Description                                                                         | Used with                 | Part Number |
|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|---------------------------|-------------|
|   | Fingersafe terminal cover, for full voltage pilot lights, adds 3mm to overall depth | Full voltage pilot lights | APD-PVL     |
|  | Fingersafe terminal cover, adds 1.5mm to overall depth                              | Transformer pilot lights  | N-VL3       |

## Nameplates — TWND Series

## Faceplates

|                      | NALD                                                                              | NAKD                                                                              | NAQD                                                                               |
|----------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|
| Dimensions           |  |  |  |
| Description          | Part Number                                                                       |                                                                                   |                                                                                    |
| Nameplate (blank)    | NALD-B (black)<br>NALD-R (red)                                                    | NAKD-B (black)<br>NAKD-R (red)                                                    | NAQD-B (black)<br>NAQD-R (red)                                                     |
| Nameplate (engraved) | NALD-①                                                                            | NAKD-①                                                                            | NAQD-①                                                                             |



1. Nameplates are made of 0.031" aluminum. Lettering is white letters engraved on black background.
2. In place of ①, insert either the standard legend code from table below or custom engraving delimited by " ".

## Standard Legend Codes

| Pushbuttons |      |               |      | Pushbuttons/Selector Switches |      |            |      | Selector Switches |      |
|-------------|------|---------------|------|-------------------------------|------|------------|------|-------------------|------|
| Legend      | Code | Legend        | Code | Legend                        | Code | Legend     | Code | Legend            | Code |
| AUTO        | 101  | OPEN          | 116  | AUTO-MAN                      | 201  |            |      | AUTO-MAN-OFF      | 301  |
| CLOSE       | 102  | OUT           | 117  | CLOSE-OPEN                    | 202  |            |      | AUTO-OFF-MAN      | 302  |
| DOWN        | 103  | RAISE         | 118  | DOWN-UP                       | 203  |            |      | CLOSE-OFF-OPEN    | 303  |
| EMERG.STOP* | 104  | RESET         | 119  | FAST-SLOW                     | 204  |            |      | DOWN-OFF-SLOW     | 304  |
| FAST        | 105  | REVERSE       | 120  | FOR-REV                       | 205  | REV-FOR    | 216  | FAST-OFF-SLOW     | 305  |
| FORWARD     | 106  | RUN           | 121  | HAND-AUTO                     | 206  | RUN-JOG    | 217  | FOR-OFF-REV       | 306  |
| HAND        | 107  | SLOW          | 122  | HIGH-LOW                      | 207  | RUN-SAFE   | 218  | LEFT-OFF-RIGHT    | 307  |
| HIGH        | 108  | START         | 123  | JOG-RUN                       | 208  | SAFE-RUN   | 219  | LOWER-OFF-RAISE   | 308  |
| IN          | 109  | STOP*         | 124  | LEFT-RIGHT                    | 209  | SLOW-FAST  | 220  | OFF-MAN-AUTO      | 309  |
| INCH        | 110  | STOP          | 125  | LOWER-RAISE                   | 210  | START-STOP | 221  | OFF-SLOW-FAST     | 310  |
| JOG         | 111  | TEST          | 126  | MAN-AUTO                      | 211  | STOP-START | 222  | OFF-1-2           | 311  |
| LOW         | 112  | UP            | 127  | OFF-ON                        | 212  | UP-DOWN    | 223  | OPEN-OFF-CLOSE    | 312  |
| LOWER       | 113  | I (Int'l On)  | 150  | ON-OFF                        | 213  |            |      | SLOW-OFF-FAST     | 313  |
| OFF         | 114  | O (Int'l Off) | 151  | OPEN-CLOSE                    | 214  |            |      | SUMMER-OFF-WINTER | 314  |
| ON          | 115  | EMO           | 152  | RAISE-LOWER                   | 215  |            |      | UP-OFF-DOWN       | 315  |
|             |      |               |      |                               |      |            |      | 1-OFF-2           | 316  |
|             |      |               |      |                               |      |            |      | HAND-OFF-AUTO     | 317  |



1. \*Available in Red as standard legend code 104 and 124. To order engraved nameplate and codes, add legend code to nameplate part number. Character height based on the number of characters, space and size of nameplate. Standard character size is 3/16".
2. Nameplates with standard legends are the same list price as blank nameplates. Special engravings, additional cost.

To specify engraving instructions, use the Nameplate order form on next page.

## Custom engraved Nameplates Order Form — TWND Series

Copy this order form and use it to specify Letter Height, Custom Engravings, Location of Engraving on Nameplate, and Quantity Desired.

To ensure engraving accuracy, fax it to your IDEC representative. or Distributor.

Your Company Name: \_\_\_\_\_

IDEC Rep/Distributor Contact: \_\_\_\_\_

Your Name: \_\_\_\_\_

PO number (if known): \_\_\_\_\_


Telephone: \_\_\_\_\_

IDEC Rep/Distributor Phone: \_\_\_\_\_

Fax & Email: \_\_\_\_\_

IDEC Rep/Distributor Fax & Email: \_\_\_\_\_

### NALD Nameplate



#### Step 1.

Choose Letter Size - 7/64" or 1/8".

Check the box for the letter size you want. Then write your lettering in box below checkboxes. Note: 1/8" size letters cannot exceed 13 characters.

#### Sample Letter Sizes

7/64" Letters: A B C D

1/8" Letters: A B C D

7/64"

Letter Size

☐

16 characters max  
(for 7/64" size letters)

1/8"

Letter Size

☐

13 characters max  
(for 1/8" size letters)

#### Step 2.


Specify Quantity.

Enter the number of nameplates desired in the box on the right.

Qty

|  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|
|  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|

### NAKD Nameplate

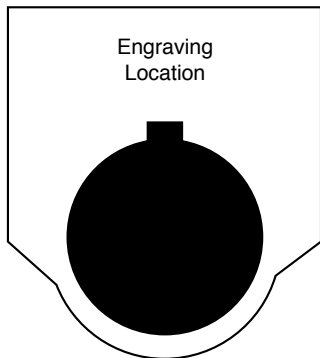

#### Step 1.

Choose Letter Size - 7/64" or 1/8".

Check the box for the letter size you want. Then write your lettering in box below checkboxes. Note: 1/8" size letters cannot exceed 9 characters.

#### Step 2.

Specify Quantity.

Enter the number of nameplates desired in the box on the right.


Qty

|  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|
|  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|

#### Sample Letter Sizes

1/8" Letters: A B C D

### NAQD Nameplate



#### Step 1.

Choose Letter Size - 7/64" or 1/8".

Check the box for the letter size you want. Then write your lettering in box below checkboxes.

Note: 1/8" size letters cannot exceed 16 characters.

7/64"

Letter Size

☐

20 characters max  
(for 7/64" size letters)

1/8"

Letter Size

☐

16 characters max  
(for 1/8" size letters)

#### Step 2.

Specify Quantity.

Enter the number of nameplates desired in the box on the right.

Qty

|  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|
|  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|

#### Sample Letter Sizes

3/32" Letters: A B C D

1/8" Letters: A B C D

## Switch Engraving Order Form – TWND Series

Copy this order form and use it to specify Letter Height, Maximum Number of Lines and Text to be engraved.

To insure engraving accuracy, fax it to your IDEC representative or Distributor.

Your Company: \_\_\_\_\_  
 Name: \_\_\_\_\_  
 Address: \_\_\_\_\_  
 PO: \_\_\_\_\_

Telephone: \_\_\_\_\_  
 Fax: \_\_\_\_\_  
 Email: \_\_\_\_\_  
 Part Number to be Engraved: \_\_\_\_\_

Please check one of the boxes below to indicate your choice of engraving options:



|                          | # of Lines | Letter Height | Max. Characters Per Line |
|--------------------------|------------|---------------|--------------------------|
| <input type="checkbox"/> | 1          | 5/32          | 7                        |
| <input type="checkbox"/> |            | 1/8           | 8                        |
| <input type="checkbox"/> | 2          | 5/32          | 7                        |
| <input type="checkbox"/> |            | 1/8           | 8                        |
| <input type="checkbox"/> | 3          | 1/8           | 8                        |
| <input type="checkbox"/> | 4          | Custom*       |                          |

\*Engraving is possible, but character size will be smaller than standard sizes.




|                          | # of Lines | Letter Height | Max. Characters Per Line |
|--------------------------|------------|---------------|--------------------------|
| <input type="checkbox"/> | 1          | 5/32          | 7                        |
| <input type="checkbox"/> |            | 1/8           | 8                        |
| <input type="checkbox"/> | 2          | 5/32          | 7                        |
| <input type="checkbox"/> |            | 1/8           | 8                        |
| <input type="checkbox"/> | 3          | 1/8           | 8                        |
| <input type="checkbox"/> | 4          | Custom*       |                          |

\*Engraving is possible, but character size will be smaller than standard sizes.



|                          | # of Lines | Letter Height | Max. Characters Per Line |
|--------------------------|------------|---------------|--------------------------|
| <input type="checkbox"/> | 1          | 3/4           | 4                        |
| <input type="checkbox"/> |            | 5/16          | 5                        |
| <input type="checkbox"/> | 2          | 5/16          | 5                        |
| <input type="checkbox"/> |            | 1/4           | 6                        |
| <input type="checkbox"/> | 3          | 5/32          | 8                        |
| <input type="checkbox"/> |            | 1/8           | 9                        |
| <input type="checkbox"/> | 4          | 1/8           | 9                        |

ø29mm, ø40mm Mushroom Head



|                          | # of Lines       | Letter Height | Max. Characters Per Line |
|--------------------------|------------------|---------------|--------------------------|
| <input type="checkbox"/> | Engraving Area 1 | 5/32          | 5                        |
| <input type="checkbox"/> |                  | 1/8           | 5                        |
| <input type="checkbox"/> | Engraving Area 2 | 5/32          | 7                        |
| <input type="checkbox"/> |                  | 1/8           | 7                        |



- Above mentioned specifications hold true for standard size push-buttons (round and square).
- \*Engraving Area 2 can be engraved for 40mm mushroom head non-illuminated pushbutton only.
- Engraving is done on the button itself for non-illuminated push buttons and on marking plate for illuminated push buttons and pilot lights.
- Please enter text exactly how you want it engraved, take care to emphasize capital or small letters.

Enter text to be engraved:

Line 1: \_\_\_\_\_  
 Line 2: \_\_\_\_\_  
 Line 3: \_\_\_\_\_  
 Line 4: \_\_\_\_\_

## Sample Letter Sizes

1/8 Letters: **OPEN**

5/32 Letters: **OPEN**




All engraving is 5/8mm wide.

For IDEC Internal Use Only:


Work Order #: \_\_\_\_\_

## Dimensions (mm)

### Pushbutton

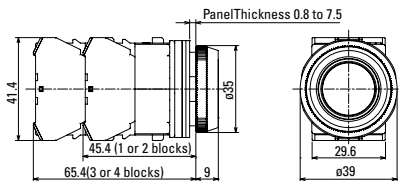

### Mushroom Pushbutton w/Full Shroud

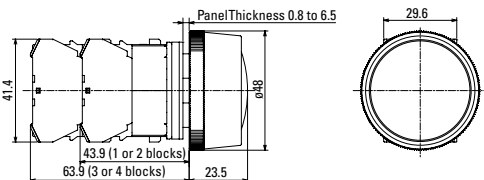

| Pushbuttons                                 | Dimension A                       | Dimension B                      |
|---------------------------------------------|-----------------------------------|----------------------------------|
| Flush                                       | 0.351" (9mm)                      | ø 0.975" (25mm)                  |
| Extended                                    | 0.566" (14.5mm)                   | ø 0.975" (25mm)                  |
| Extended w/Full Shroud                      | 0.663" (17mm)                     | ø 1.11" (28.5mm)                 |
| Mushroom                                    | 0.858" (22mm)                     | ø 1.56" (40mm)                   |
| Mushroom w/Full Shroud                      | 0.936" (24mm)                     | ø 1.87" (48mm)                   |
| Jumbo Mushroom                              | 1.13" (29mm)                      | ø 2.54" (65mm)                   |
| Mushroom, Pushlock Turn Reset and Push-Pull | *0.975" (25mm)<br>**0.975" (25mm) | ø 1.56" (40mm)<br>ø 1.56" (40mm) |




\*Dimension when operator is in reset position.


\*\*Dimension when operator is in pull position.

### Illuminated Pushbuttons

w/Transformer

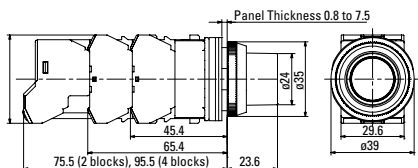


Full Voltage

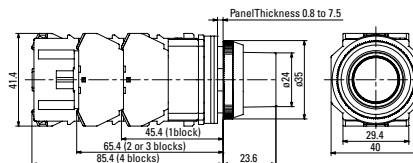

| Illuminated Pushbuttons                                | Dimension A                       | Dimension B                        |
|--------------------------------------------------------|-----------------------------------|------------------------------------|
| Flush w/Full Shroud                                    | 0.975" (25mm)<br>0.995" (25.5mm)  | ø 0.936" (24mm)<br>ø 0.936" (24mm) |
| Extended w/Full Shroud                                 | 0.741" (19mm)<br>0.761" (19.5mm)  | ø 0.936" (24mm)<br>ø 0.936" (24mm) |
| ø 1.56" (40mm) Mushroom Pushlock Turn Reset, Push-Pull | *0.975" (25mm)<br>**0.975" (25mm) | ø 1.56" (40mm)<br>ø 1.56" (40mm)   |


### Pilot Lights

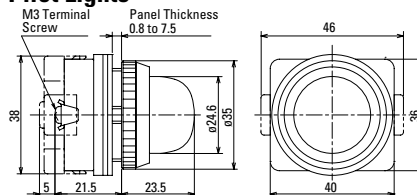


\*Dimension when operator is in reset position.  
\*\*Dimension when operator is in pull position.

### Selector Switches


#### Knob

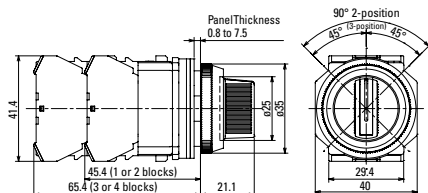


#### Lever

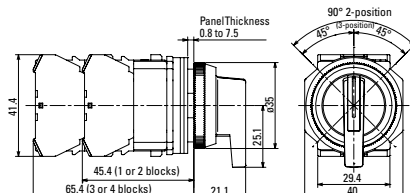

#### Key

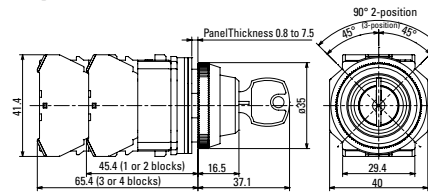

### Illuminated Knob

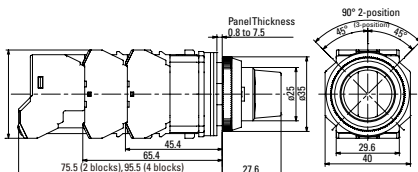

Technical drawing of a 3D part with dimensions and tolerances. The part is a cylinder with a diameter of 30.5 (+0.5/-0.5) and a height of 33. The top surface is a square with a side length of 42 (+1/-0.2) and a fillet radius of R0.8 max. The bottom surface is a square with a side length of 50 (+1/-0.2). The drawing includes a top view, a front view, and a side view. The top view shows a square with a circular hole in the center. The front view shows a cylinder with a square top. The side view shows a cylinder with a square top. The drawing includes a title block with the text '3D Model' and 'Technical Drawing'.



1. \*Jumbo Mushroom < 2.61" (66mm)
2. Minimum mounting centers are applicable to switches with one stack of contact blocks. When mounting two stacks of contact blocks, minimum centers should allow for access to wiring.
3. The  $\varnothing 0.195"$  ( $\varnothing 5\text{mm}$ ) recess is necessary when either the nameplate or anti-rotation ring is used.

**OL-KL1**

Technical drawing of the 100mm diameter water meter, showing dimensions and components.

**Top View Dimensions:**

- Outside diameter:  $\phi 82.5$
- Inside diameter:  $\phi 44$
- Key Hole  $\phi 8$

**Side View Dimensions:**

- Panel Thickness: 0.8 to 32
- Rubber Gasket: 24.8
- Key Hole  $\phi 8$

**Other Dimensions:**

- Waterproof Rubber Gasket 0.5t


**OC-31**

Technical drawing of the OC-31 and OC-32 profiles. The drawing shows a cross-section of the profile with a diameter of 32.6 mm and a width of 18 mm for the OC-31 and 22 mm for the OC-32.


**OGL-31**

**OB-31**

### N-VL3

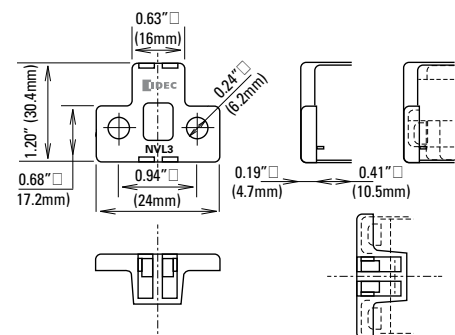

## APD-PVL

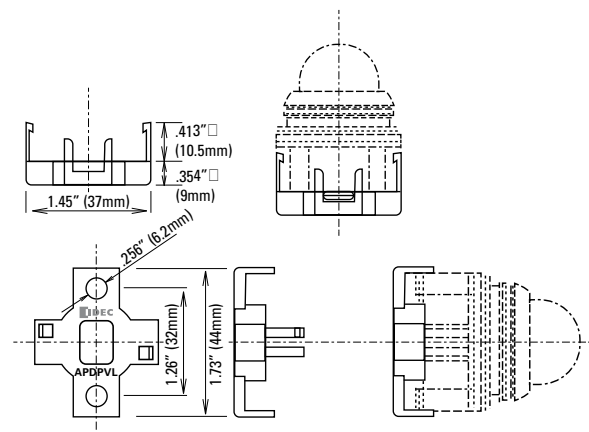

Switches & Pilot Devices

Signaling Lights

Relays & Sockets

Timers

Contactors


Terminal Blocks

Circuit Breakers

Operating Instructions

Adjustment for Panel Thickness

Each unit is shipped with several waterproof gaskets which are 0.06" (1.5mm) and 0.12" (3mm) thick. Combine the gaskets for a dimension approximately equal to panel thickness and install between the bezel and the body of the unit.

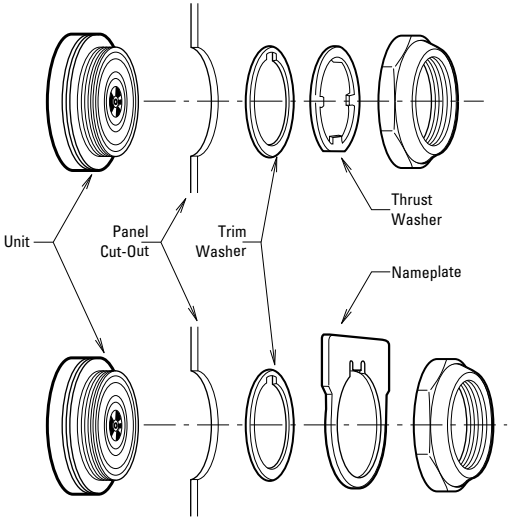

A trim washer must be used with a thrust washer or a nameplate to prevent the control unit from rotating in the mounting hole. When using anti-rotation rings (trim washer with thrust washer or nameplate), install as shown below.

Selector Switches

The operator shaft of each unit has a recess to identify in which direction to install the handle. Align the handle with the recess. Press color insert (TW-HC1) into the Standard Operating Positions.

Standard Operation Positions

| 2-Position, 90° | 3-Position, 45° |
|-----------------|-----------------|
|                 |                 |

Non-Illuminated 3-Position Operators

|  |  |  |
|--|--|--|
|  |  |  |
|--|--|--|


Insallation of LED Illuminated Units

Transformer units are recommended for use in areas subjected to inductive noise.


Application Example For Push-To-Test Pilot Light

A typical application of illuminated pushbuttons is a push-to-test pilot light which can be used to check the lamp/LED circuit.

Transformer/AC-Adapter Circuit

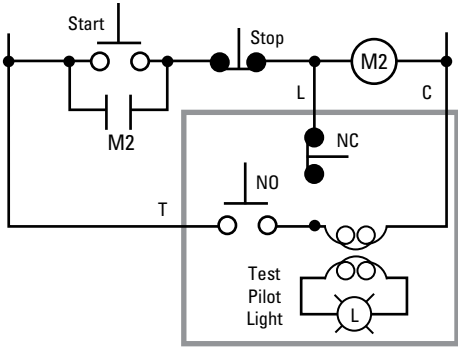

Full Voltage Circuit

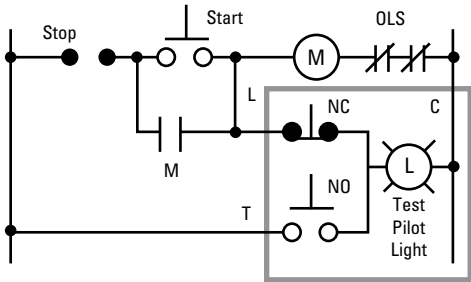

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## IDEC:

[ASD211N](#) [ASD210N](#) [ASD320N](#) [ASD2210N](#) [ASD2L20N-ZT3](#) [AYLD229902N-G-24V-TK962](#) [ASD2110NU](#)  
[AYLD229902N-S-120V-TK962](#) [ASD32L11N-203](#) [AYLD229903SDN-A-24V-TK962-CCLX](#) [ASD22L22NU-111](#)  
[ASD3111N-303](#) [ASD3L20NU-301](#) [ASD3L11N-202](#) [ASD32L02N](#) [ASD3304NU](#) [ASD31L02N](#) [ASD3111N-202](#)  
[ASD212N](#) [ASD3104N](#) [AYLD229902N-R-120V-TK962](#) [ASD3L02NU](#) [ASD233N](#) [AYLD229920N-R-12V-TK962](#)  
[ASD22L22N](#) [ASD3L22N-309](#) [ASD2222NU-111](#) [ASD3311NU-203](#) [ASD3111N-203](#) [AYLD229911N-W-12V-TK962](#)  
[ASD200-B](#) [AYLD229911N-S-120V-TK392](#) [ASD2L40N](#) [ASD3L11NU-202](#) [ASD33L22NU-309](#) [ASD222NU](#) [ASD322N-](#)  
[210](#) [ASD320NU-301](#) [ASD340N-305](#) [ASD2210NU](#) [ASD21L10NU](#) [ASD31L22N](#) [ASD2220NU](#) [ASD302NU](#)  
[ASD3211N-202](#) [ASD3140N](#) [ASD2L04N](#) [ASD340N-R](#) [ASD2110N](#) [ASD2L11N-103](#) [ASD2L22NU-111](#) [ASD3212N-325](#)  
[AYLD229902SN-R-6V-TK962](#) [ASD33L40N](#) [ASD240N-105](#) [ASD340NU](#) [ASD31L22N-310](#) [ASD31L40N](#) [ASD3311N-](#)  
[202](#) [ASD31L22NU-310](#) [ASD3211N-302](#) [ASD3L40NU](#) [AYLD229911DN-R-240V-TK962](#) [AYLD229911N-R-6V-TK962](#)  
[AYLD229902N-G-6V-TK962](#) [ASD204N](#) [ASD21L20N](#) [ASD3120N-R](#) [ASD2102N-104](#) [ASD321N](#) [AYLD229911DN-S-](#)  
[24V-TK962](#) [ASD3120NU](#) [AYLD229920N-R-6V-TK962](#) [ASD3311N-203](#) [AYLD229902SN-G-12V-TK962](#)  
[ASD22L01NU-116](#) [ASD311N-302](#) [ASD33L60N](#) [ASD3340N](#) [ASD2L22NU](#) [ASD2202NU-104](#) [ASD3322NU](#)  
[ASD32L22N-309](#) [AYLD229911DN-R-120-TK962](#) [ASD2L20N-LVO](#) [ASD3320NU](#) [ASD2L10N](#) [ASD21L02NU-104](#)  
[AYLD229902SN-W-12V-TK962](#) [AYLD229920N-W-12V-TK962](#) [AYLD229902SN-S-120V-TK962](#) [ASD3K21-2-LEXEXX-](#)  
[W/TW-FA1](#) [ASD3122N-309](#) [AYLD229902SN-R-12V-TK962](#) [ASD3322NU-310](#) [ASD2222N-111](#) [ASD3322N-309](#)  
[ASD32L40NU](#) [AYLD229902N-W-120V-TK962](#) [ASD32L22NU-309](#)