

Features

- DIN Rail Mounting Kit for AC/DC Converter Modules
- Facilitate Easy Installation
- Universal PCB with Pre-Mounted Fuse and Terminal Blocks
- Suitable for any RECOM AC/DC Module up to 10W
- For Industrial Control, Automation and Systems Monitoring Applications

POWERLINE Mounting Bracket



Description



RECOM has introduced this DIN-rail mounting kit to make the mounting of low power AC/DC-modules in electrical cabinets quick, easy and safe. The kit consists of a universal PCB with pre-mounted fuse and terminal blocks, an MOV surge protection device for the 1W and 2W modules and a clip-on mounting bracket suitable for all standard 35mm DIN rails. The mounting kit can be used with any RECOM AC/DC module up to 10W, including the 277VAC input versions. The discrete layout of the printed circuit board allows easy access to all components. Converters up to 3 watts are supplied with a varistor(MOV-Metal Oxide Varistor) that offers additional protection against over voltage if required. Converters with higher power ratings have these varistors already incorporated.

Selection Guide

Part Number	Specification
RAC-DIN	suitable for any AC/DC Power Module from 1W to 10W (single & dual Outputs)

Package Style

RAC01_02-xxSC, RAC03-xxSC Series Screw Terminal Socket

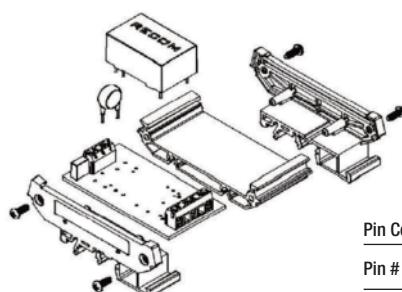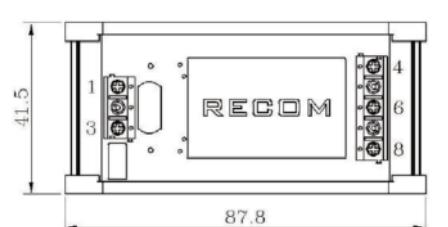

Pin Connections	
Pin #	
1	VAC in (N)
3	VAC in (L)
4	Dual -VDC out
6	Dual Com
	Single -VDC out
8	+VDC out

Tolerance $\pm 0.5\text{mm}$

A: RAC01_02-xxSC Series = 32.8mm



RAC03-xxSC Series = 31.5mm



RAC-DIN



RAC04C-xxS(D)H, RAC05_06-xxSC, RAC10-xxS(D)C Series Screw Terminal Module Option

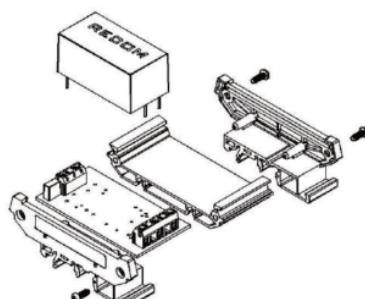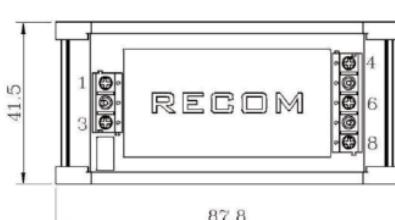

Pin Connections	
Pin #	
1	VAC in (N)
3	VAC in (L)
4	Dual -VDC out
6	Dual Com
	Single -VDC out
8	+VDC out

Tolerance $\pm 0.5\text{mm}$

A: RAC04-xxS(D)C Series = 32.2mm

RAC05_06-xxSC Series = 31.5mm

RAC10-xxS(D)C Series = 38.6mm

The product information and specifications are subject to change without prior notice. All products are designed for non-safety critical commercial and industrial applications. The Buyer agrees to implement safeguards that anticipate the consequences of any failures that might cause harm, loss of life and/or damage property.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[RECOM:](#)

[RAC-DIN-Rail](#)