

## SPECIFICATION

- Part No. : **PC11.07.0100A**
- Product Name : **TheStripe™** PCB Dual-band 2.4 / 5.2 GHz antenna
- Features : High Efficiency Dual Band for Wi-Fi  
/Bluetooth/Zigbee Applications  
IPEX MHF Connector (U.FL compatible)  
RoHS Compliant



## 1. Introduction

This miniaturized low profile PCB antenna is based on smart TheStripe™ antenna technology. It consists of a PCB antenna and mini coaxial cable.

Many module manufacturers specify peak gain limits for any antennas that are to be connected to that module. Those peak gain limits are based on free-space conditions. In practice, the peak gain of an antenna tested in free-space can degrade by at least 1 or 2dBi when put inside a device. So ideally you should go for a slightly higher peak gain antenna than mentioned on the module specification to compensate for this effect, giving you better performance.

Upon testing of any of our antennas with your device and a selection of appropriate layout, integration technique, or cable, Taoglas can make sure any of our antennas' peak gain will be below the peak gain limits. Taoglas can then issue a specification and/or report for the selected antenna in your device that will clearly show it complying with the peak gain limits, so you can be assured you are meeting regulatory requirements for that module.

For example, a module manufacturer may state that the antenna must have less than 2dBi peak gain, but you don't need to select an embedded antenna that has a peak gain of less than 2dBi in free-space. This will give you a less optimized solution. It is better to go for a slightly higher free-space peak gain of 3dBi or more if available. Once that antenna gets integrated into your device, performance will degrade below this 2dBi peak gain due to the effects of GND plane, surrounding components, and device housing. If you want to be absolutely sure, contact Taoglas and we will test. Choosing a Taoglas antenna with a higher peak gain than what is specified by the module manufacturer and enlisting our help will ensure you are getting the best performance possible without exceeding the peak gain limits.


Cable and Connectors are customizable.

## 2. Specification


| ELECTRICAL                |                            |              |
|---------------------------|----------------------------|--------------|
| Frequency                 | 2.4 ~ 2.5GHz,              | 4.9 ~ 5.9GHz |
| Peak Gain (free space)    | 3dBi                       | 4.5dBi       |
| Average Gain (on plastic) | -0.6dBi                    | -0.5dBI      |
| Efficiency (free space)   | 85%                        | 88%          |
| Polarization              | Linear                     |              |
| Impedance                 | 50 Ohms                    |              |
| Radiation Pattern         | Omni                       |              |
| Input Power               | 2W max.                    |              |
| MECHANICAL                |                            |              |
| Dimensions                | 66 x 16 x 0.8 mm           |              |
| Antenna Body Material     | FR4                        |              |
| Cable                     | Black 100mm 1.13 co-axial  |              |
| Connector                 | IPEX MHFI                  |              |
| Weight                    | 2g                         |              |
| ENVIRONMENTAL             |                            |              |
| Temperature Range         | -40°C to 85°C              |              |
| Humidity                  | Non-condensing 65°C 95% RH |              |

### 3. Antenna Characteristics



#### 3.1. Return Loss

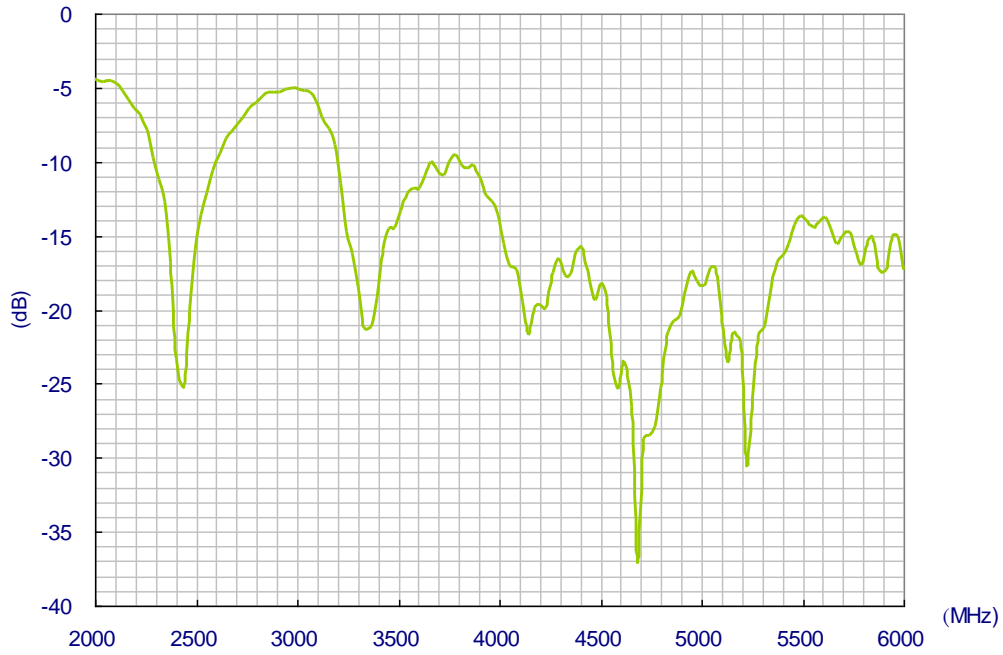



#### 3.2. VSWR

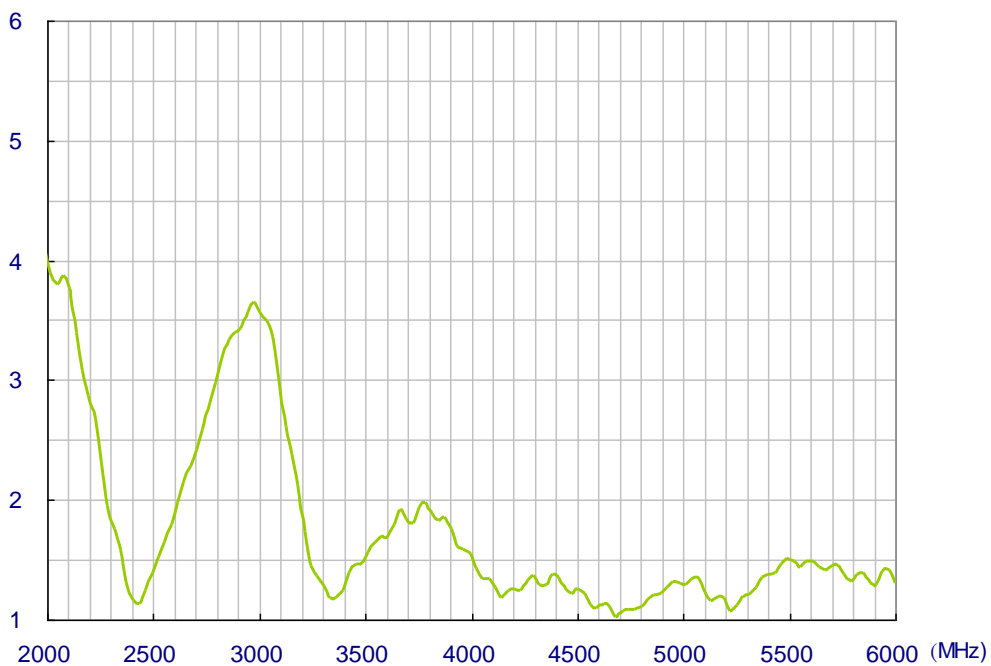



### 3.3. Antenna Efficiency

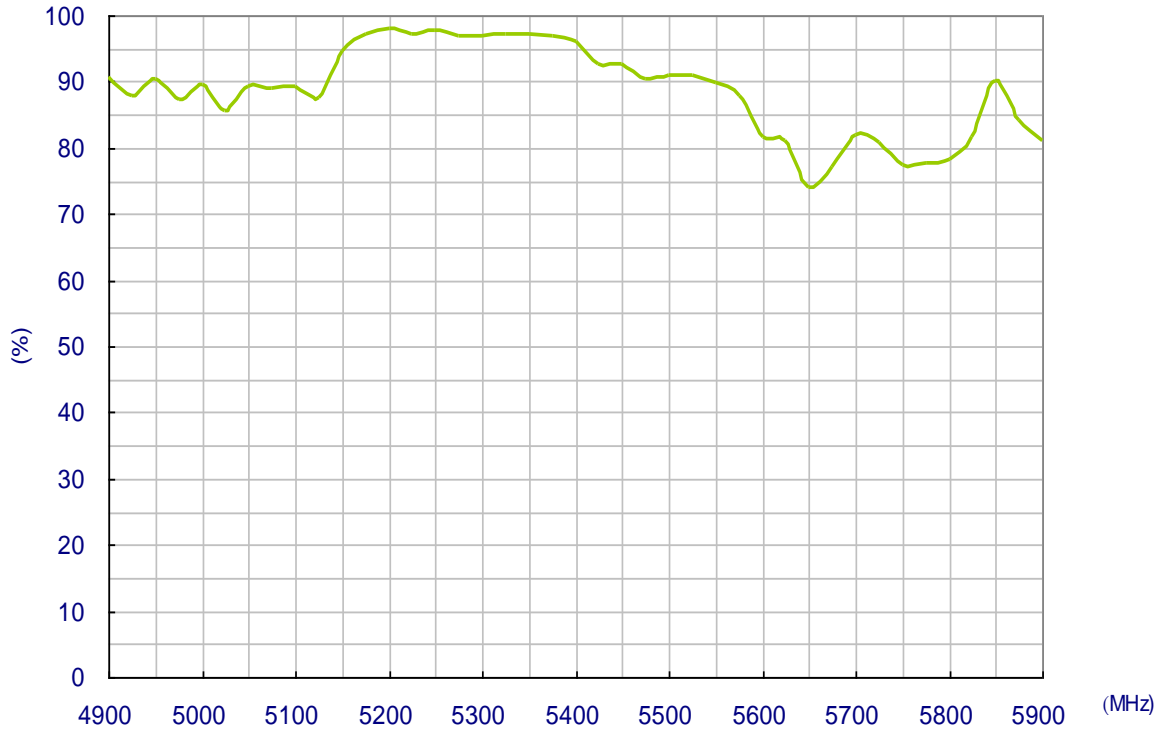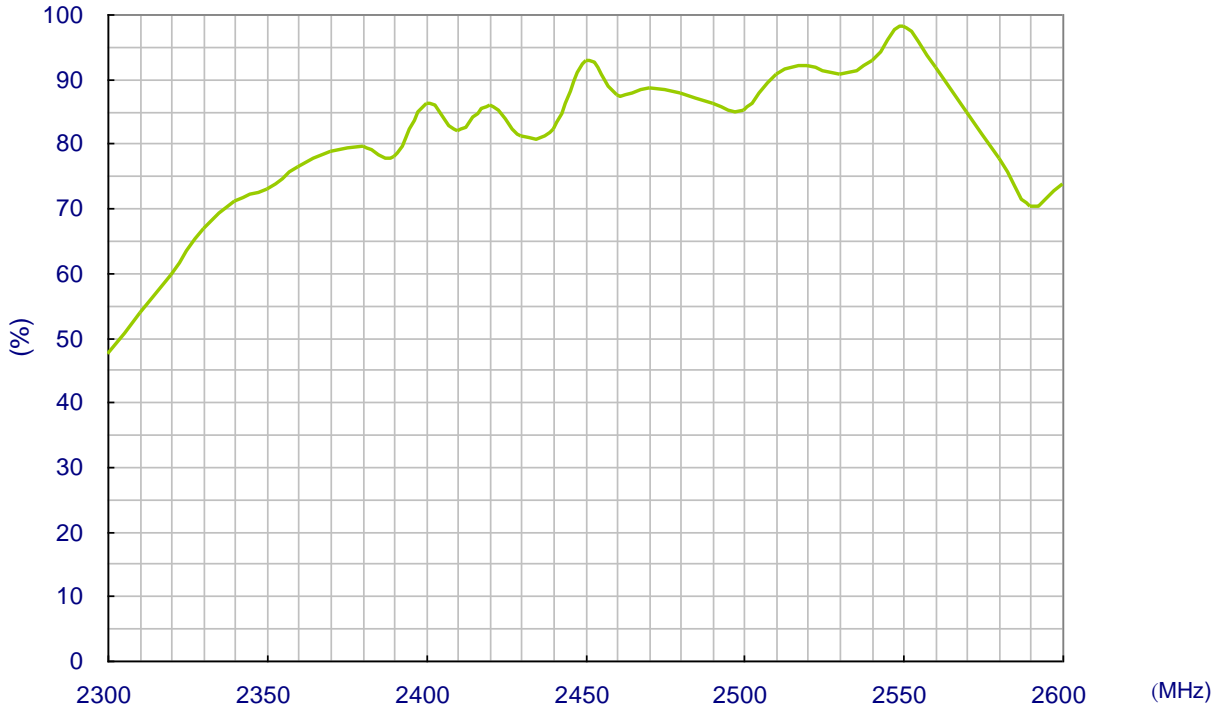


### 3.4. Antenna Peak Gain

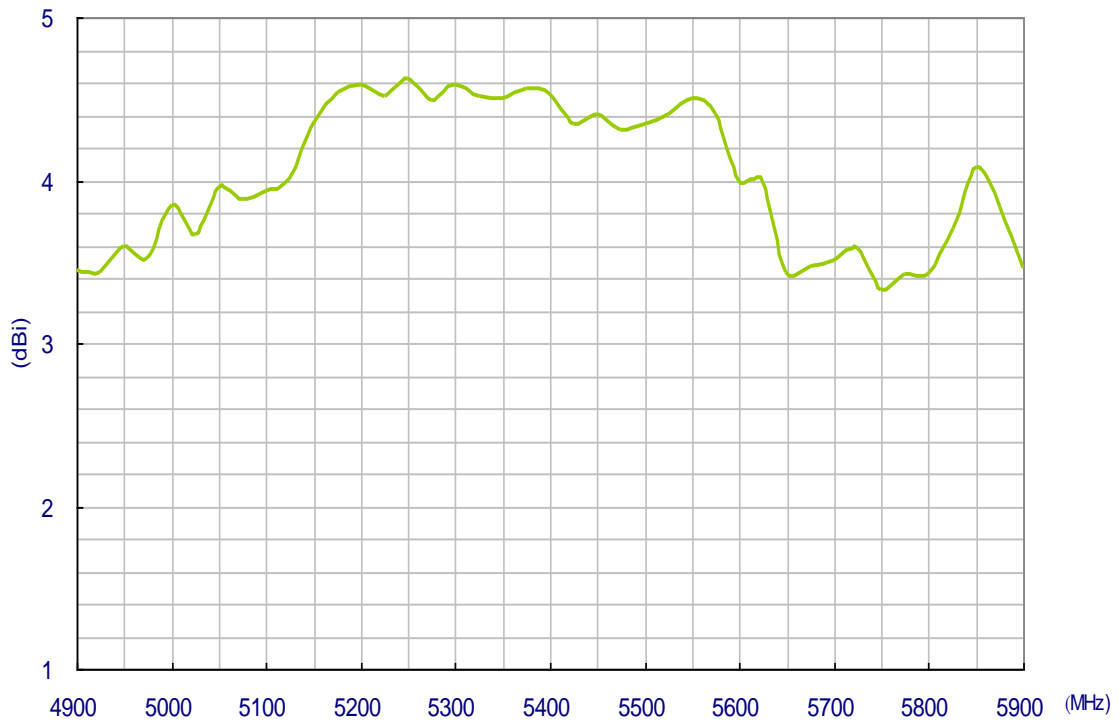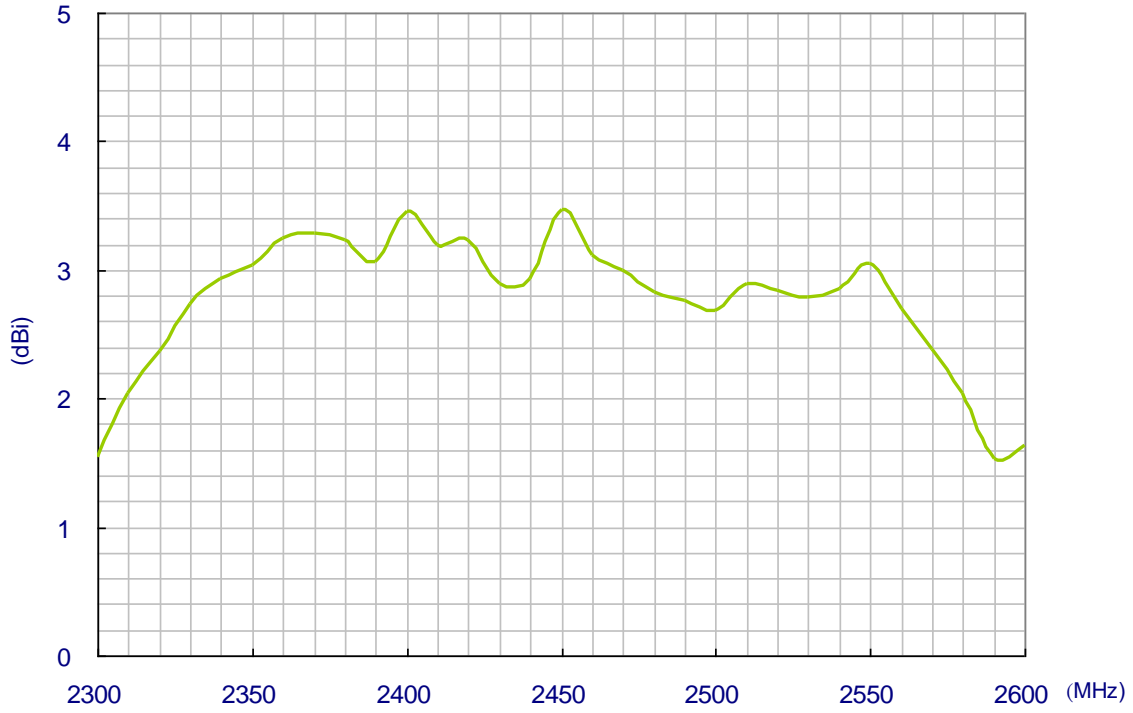


### 3.5. Antenna 3D Average Gain

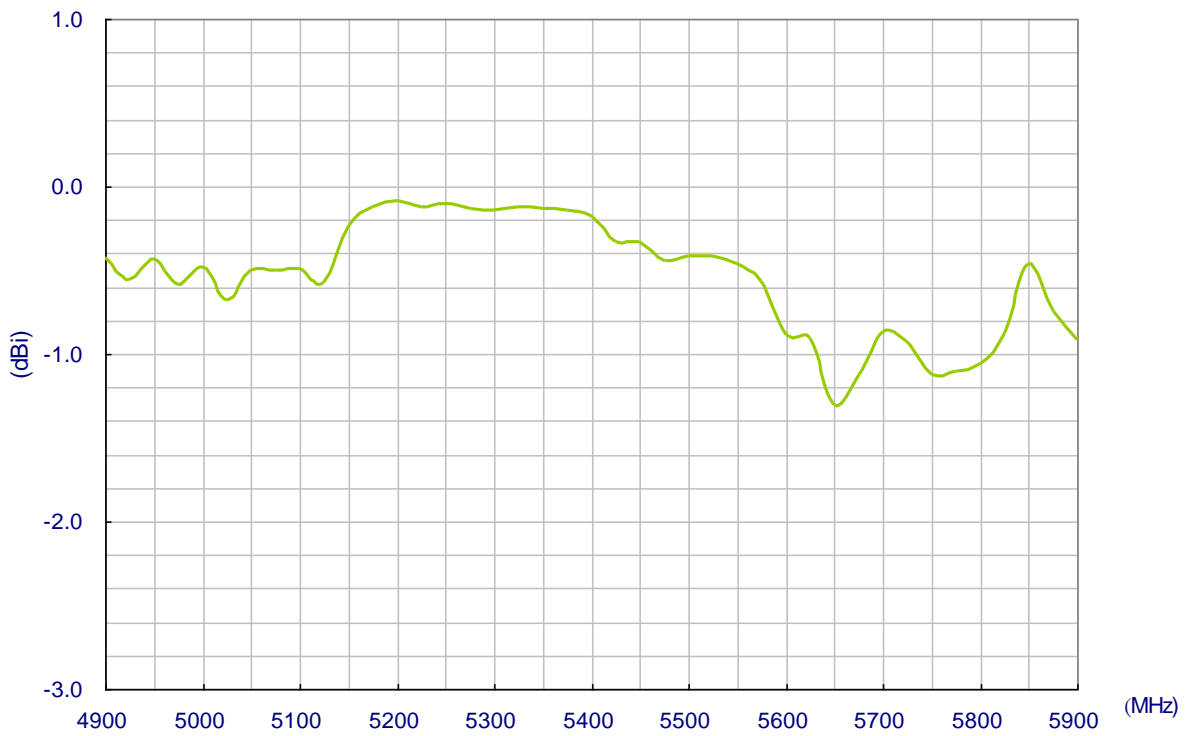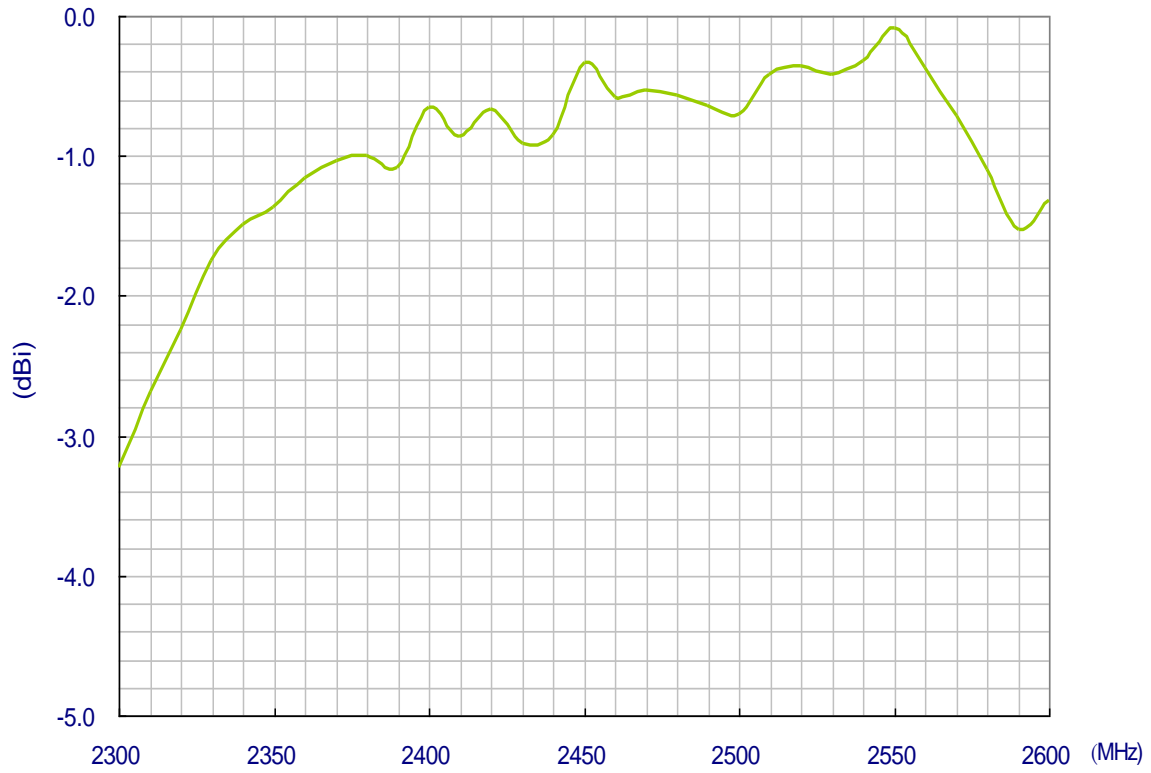

### 3.6. Radiation Pattern for PC11 on plastic

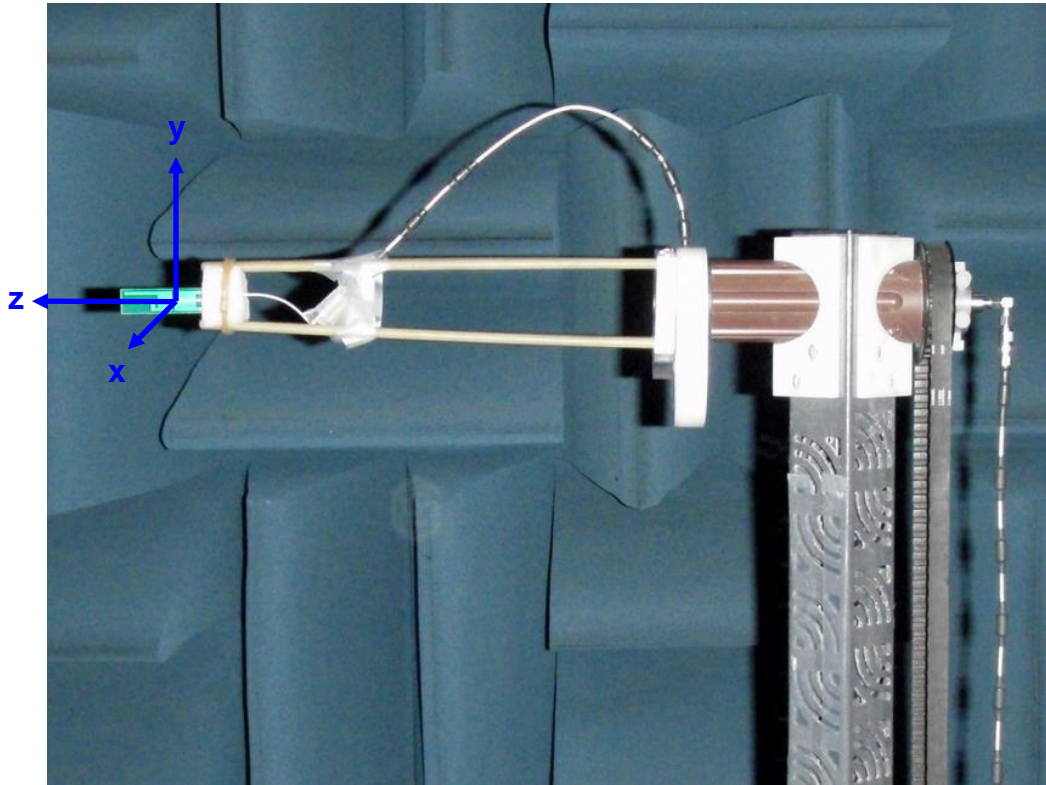


#### XY-plane

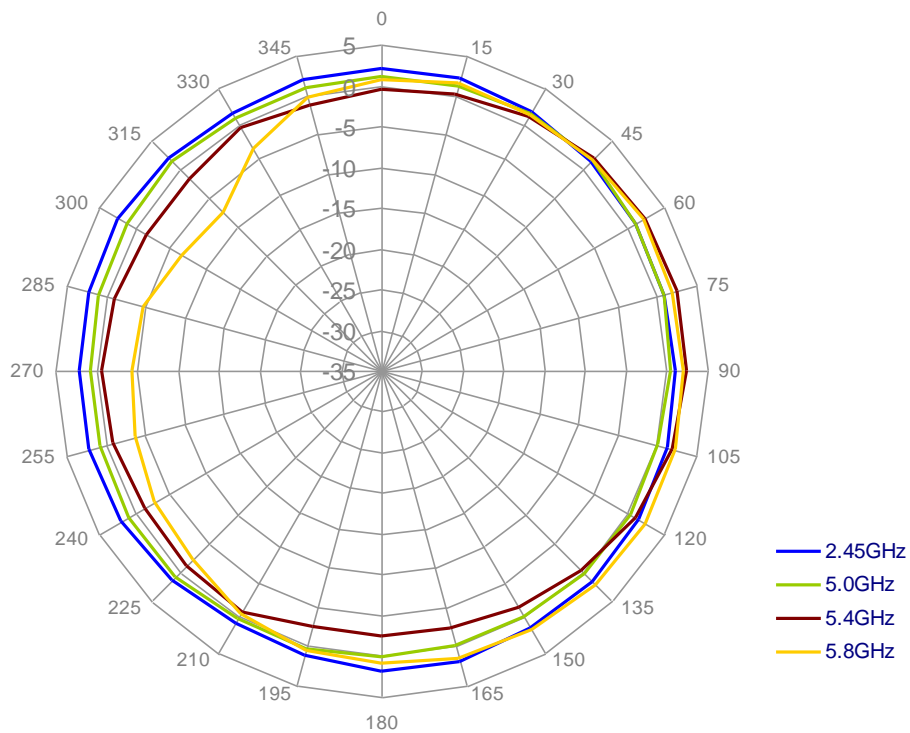




## XZ-plane

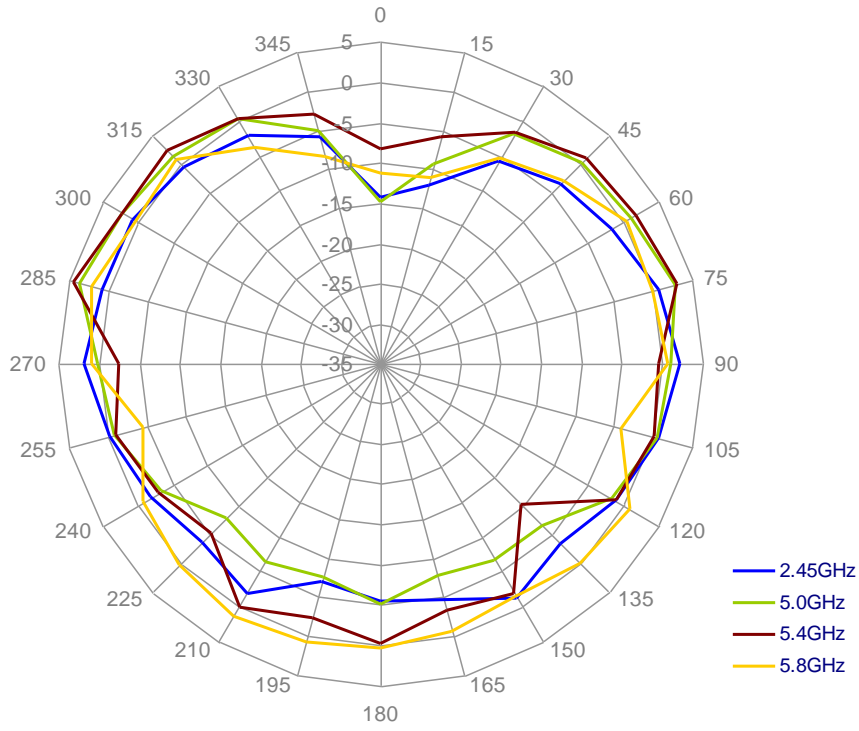


## 4. Antenna Drawing

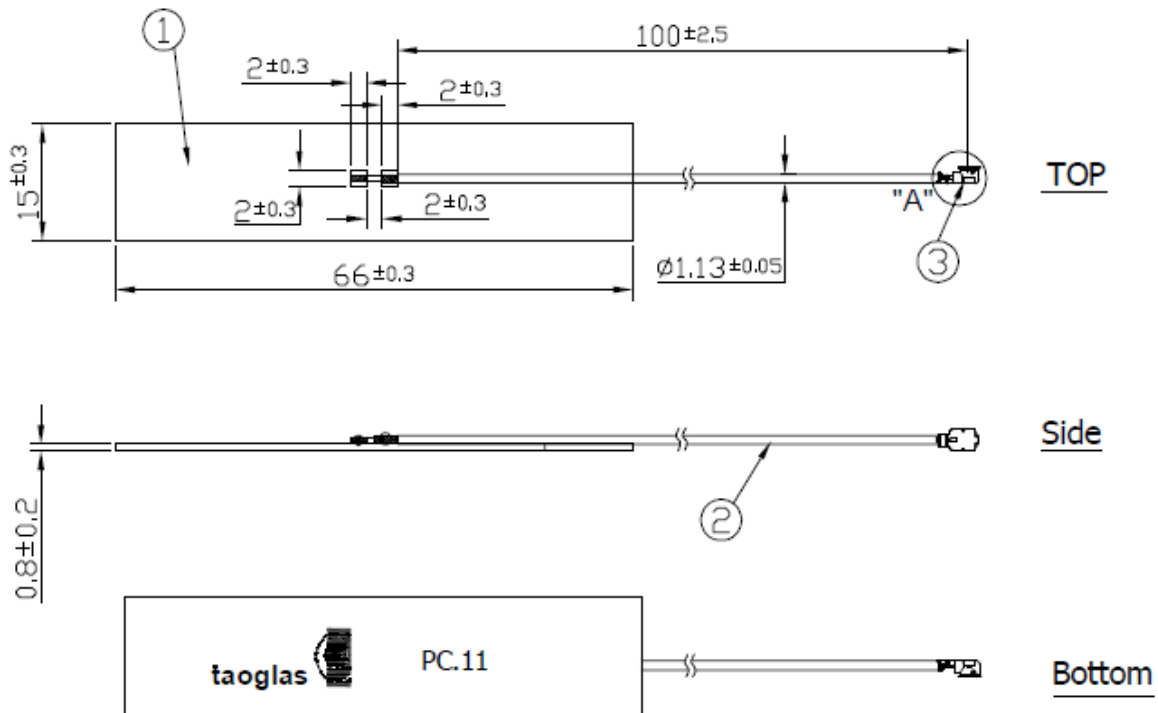

|   | Name              | Material | Finish              | QTY |
|---|-------------------|----------|---------------------|-----|
| 1 | PC11 PCB          | FR4 0.8t | Black               | 1   |
| 2 | 1.13 Mini-Coaxial | FEP      | Black $\triangle B$ | 1   |
| 3 | IPEX MHF 1        | Brass    | Gold                | 1   |

### NOTES:

- 1.NO DREGS OR INSUFFICIENT SOLDERING. SOLDER THICKNESS 1 ~1.7mm
- 2.THE SOLDER MUST BE SMOOTH AND FULL TO THE EDGES OF THE PAD.  
THE SOLDER MUST NOT EXTEND OUTSIDE OF THE PAD AREA.
- 3.THE CONNECTOR POSITION HAS SPECIAL ORIENTATION TO THE PCB AS PER DRAWING.
- 4.ALL MATERIAL MUST BE ROHS COMPLIANT.  $\triangle B$
- 5.OPEN/SHORT QC, VSWR REQUIRED.

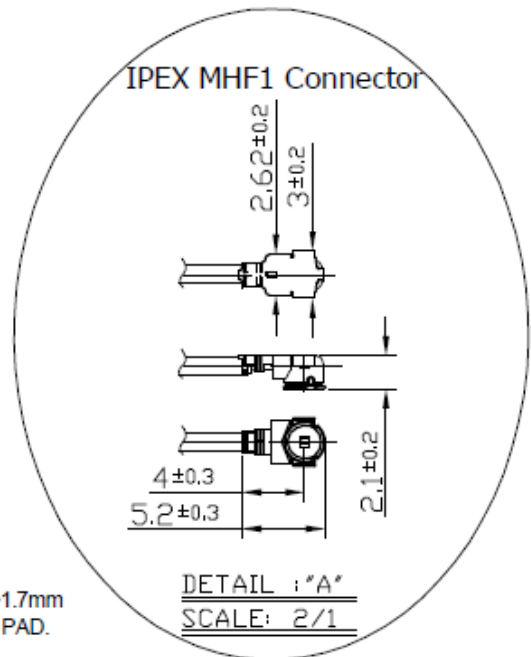

Unit:mm

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Taoglas:](#)

[PC11.07.0100A](#)