



ELECTRICAL:
CONTACT RATING: SILVER: 300 MILLIAMPS @ 115 VAC.
CONTACT RESISTANCE: INITIAL 40 MILLIOHMS MAX.
INSULATION RESISTANCE: 1000 MEGOHMS MAX.
DIELECTRIC STRENGTH: 600 VOLTS RMS AT SEA LEVEL.
LIFE EXPECTANCY: 15,000 CYCLES MIN.

NOTES: UNLESS OTHERWISE SPECIFIED

1. ALL SWITCHES HAVE OPEN ENDS EXCEPT TOP FLUSH ACTUATOR, WHICH COMES STANDARD WITH TAPE SEAL.
2. STANDARD PRODUCT (AFTER WELD) HEIGHT IS ALLOWED UP TO .180 IN. ALL SWITCH "SPECIALS" MUST MAINTAIN .178 MAX. (AFTER WELD) HEIGHT.
3. TAPE AND REEL PER EIA 481 OR 22" ANTI-STATIC TUBES

△₄ SAME AS ASF22LTR WITHOUT TAPE SEAL

* = OPTIONS (SEE CHART)

UPRIGHT, THROUGH HOLE, EXTENDED ACTUATORRIGHT ANGLE, THROUGH HOLE, FLUSH ACTUATORRIGHT ANGLE, THROUGH HOLE, EXTENDED ACTUATORUPRIGHT, SURFACE MOUNT "L" TYPE, FLUSH ACTUATOR

UPRIGHT, SURFACE MOUNT "L" TYPE, EXTENDED ACTUATOR

UPRIGHT, SURFACE MOUNT "S" TYPE, FLUSH ACTUATORUPRIGHT, SURFACE MOUNT "S" TYPE, EXTENDED ACTUATOR

P/N	T&B MODEL	FUNCTION
1437581-6	ASE22GS	DPDT
1-1437581-3	ASE22S	DPDT
	ASE42GS	4PDT
2-1437581-4	ASE42S	4PDT
	ASE43GS	4P3T
	ASE43S	4P3T
	ASE62GS	6PDT
	ASE62S	6PDT

RIGHT ANGLE, SURFACE MOUNT "L" TYPE, FLUSH ACTUATOR

P/N	T&B_MODEL	FUNCTION
6-1437581-4	ASF22RGL	DPDT
	ASF22RL	DPDT
7-1437581-5	ASF42RGL	4PDT
7-1437581-6	ASF42RL	4PDT
	ASF43RGL	4P3T
	ASF43RL	4P3T
9-1437581-2	ASF62RGL	6PDT
	ASF62RL	6PDT

RIGHT ANGLE, SURFACE MOUNT "L" TYPE, EXTENDED ACTUATOR

P/N	T&B MODEL	FUNCTION
	ASE22RGL	DPDT
1-1437581-1	ASE22RGL	DPDT
2-1437581-1	ASE42RGL	4PDT
2-1437581-2	ASE42RGL	4PDT
	ASE43RGL	4P3T
	ASE43RGL	4P3T
3-1437581-8	ASE62RGL	6PDT
3-1437581-9	ASE62RGL	6PDT

RIGHT ANGLE, SURFACE MOUNT "S" TYPE, EXTENDED ACTUATOR

P/N	T&B MODEL	FUNCTION
1-1437581-0	ASE22RGS	DPDT
1-1437581-2	ASE22RS	DPDT
	ASE42RGS	4PDT
2-1437581-3	ASE42RS	4PDT
	ASE43RGS	4P3T
	ASE43RS	4P3T
	ASE62RGS	6PDT
	ASE62RS	6PDT

RIGHT ANGLE, SURFACE MOUNT "S" TYPE, FLUSH ACTUATOR


P/N	T&B MODEL	FUNCTION
6-1437581-5	ASF22RGS	DPDT
6-1437581-6	ASF22RS	DPDT
	ASF42RGS	4PDT
	ASF42RS	4PDT
	ASF43RGS	4P3T
	ASF43RS	4P3T
9-1437581-3	ASF62RGS	6PDT
	ASF62RS	6PDT

UPRIGHT, THROUGH HOLE, FLUSH ACTUATOR


P/N	T&B MODEL	FUNCTION
5-1437581-6	ASF22	DPDT
5-1437581-8	ASF22G	DPDT
6-1437581-8	ASF42	4PDT
7-1437581-0	ASF42G	4PDT
7-1437581-8	ASF43	4P3T
7-1437581-9	ASF43G	4P3T
8-1437581-4	ASF62	6PDT
8-1437581-6	ASF62G	6PDT

4805 (3/11)


LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN
AD	00	—	—	SEE SHEET 1	—	—

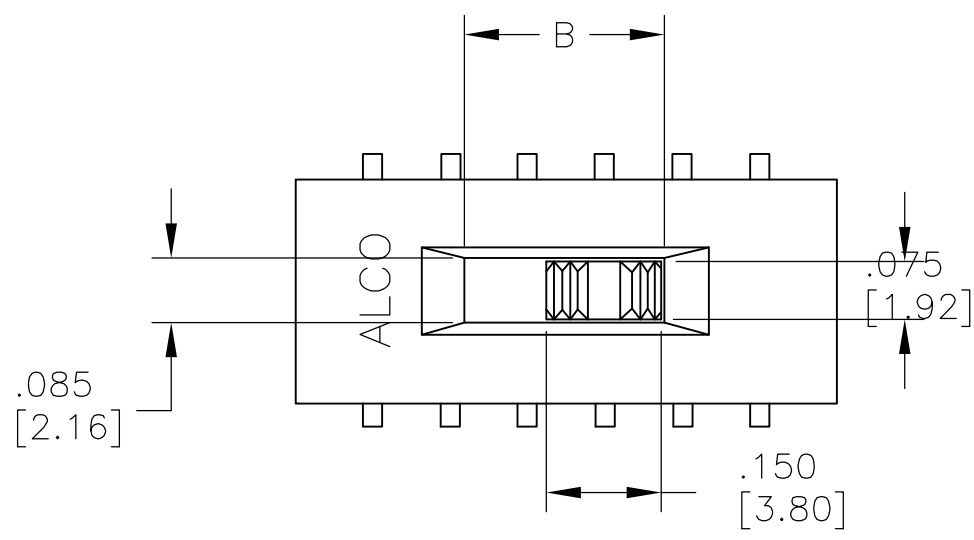


* SIDE ACTUATOR ONLY.

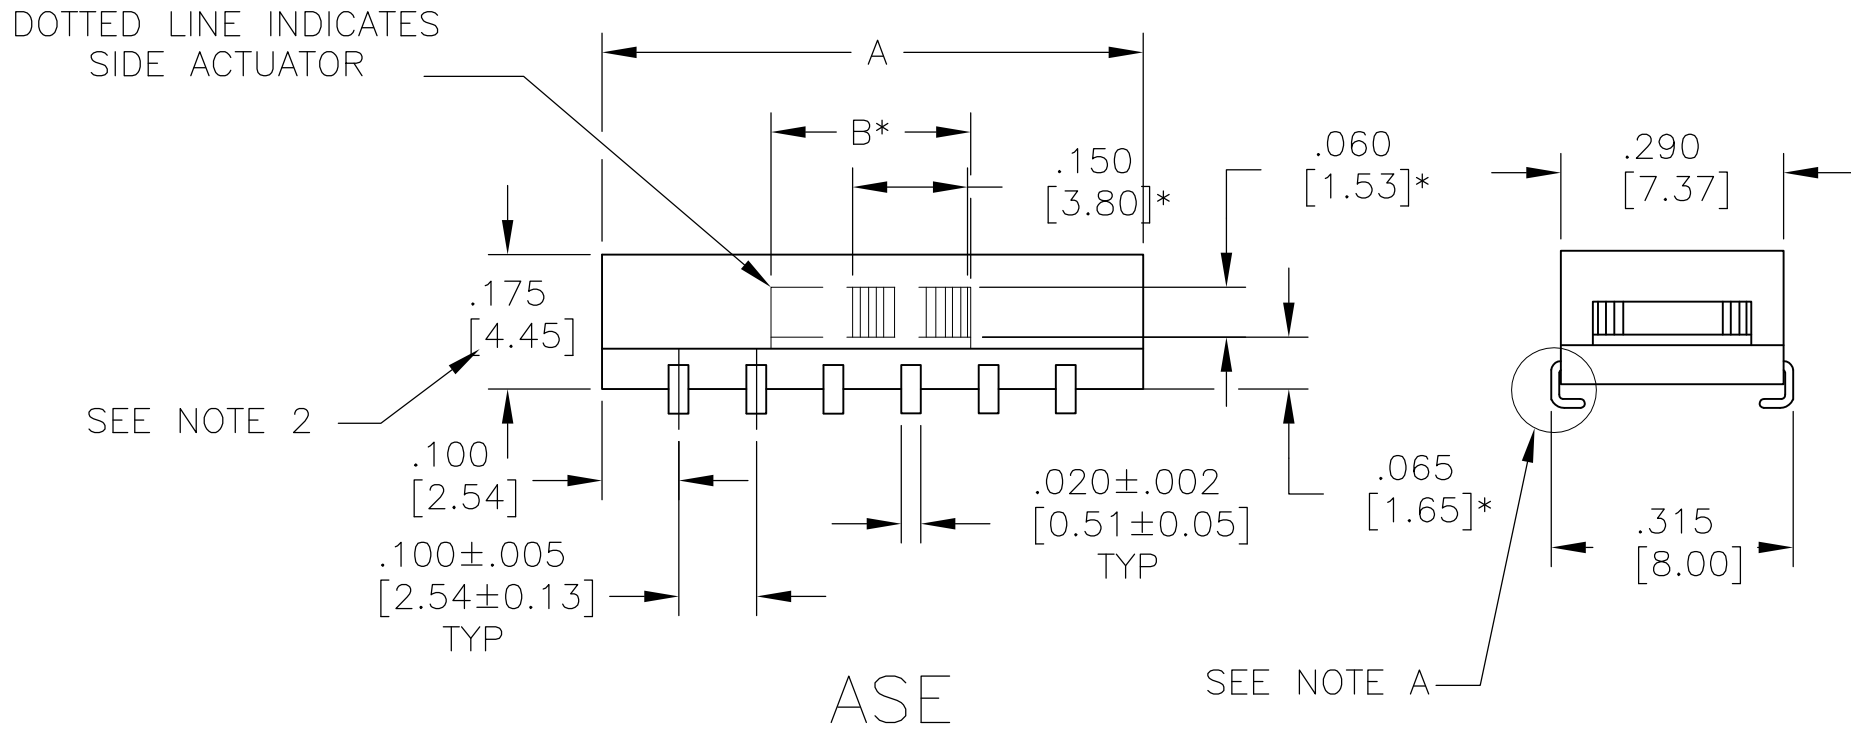

ASE

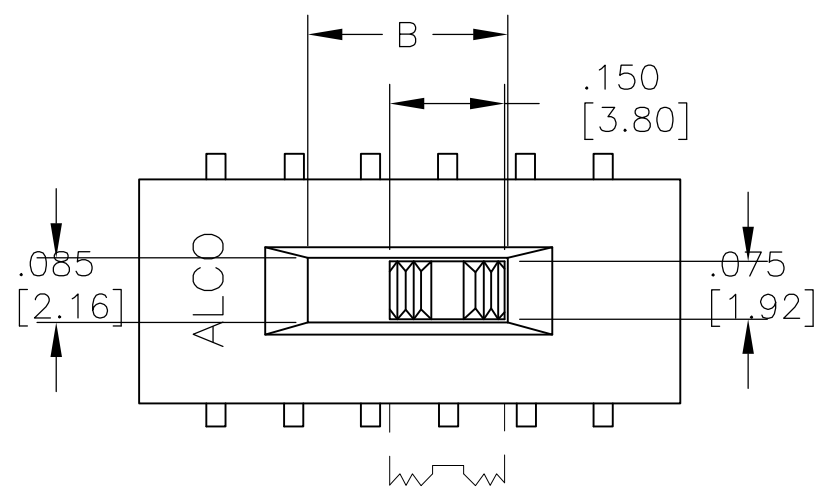


* SIDE ACTUATOR ONLY.

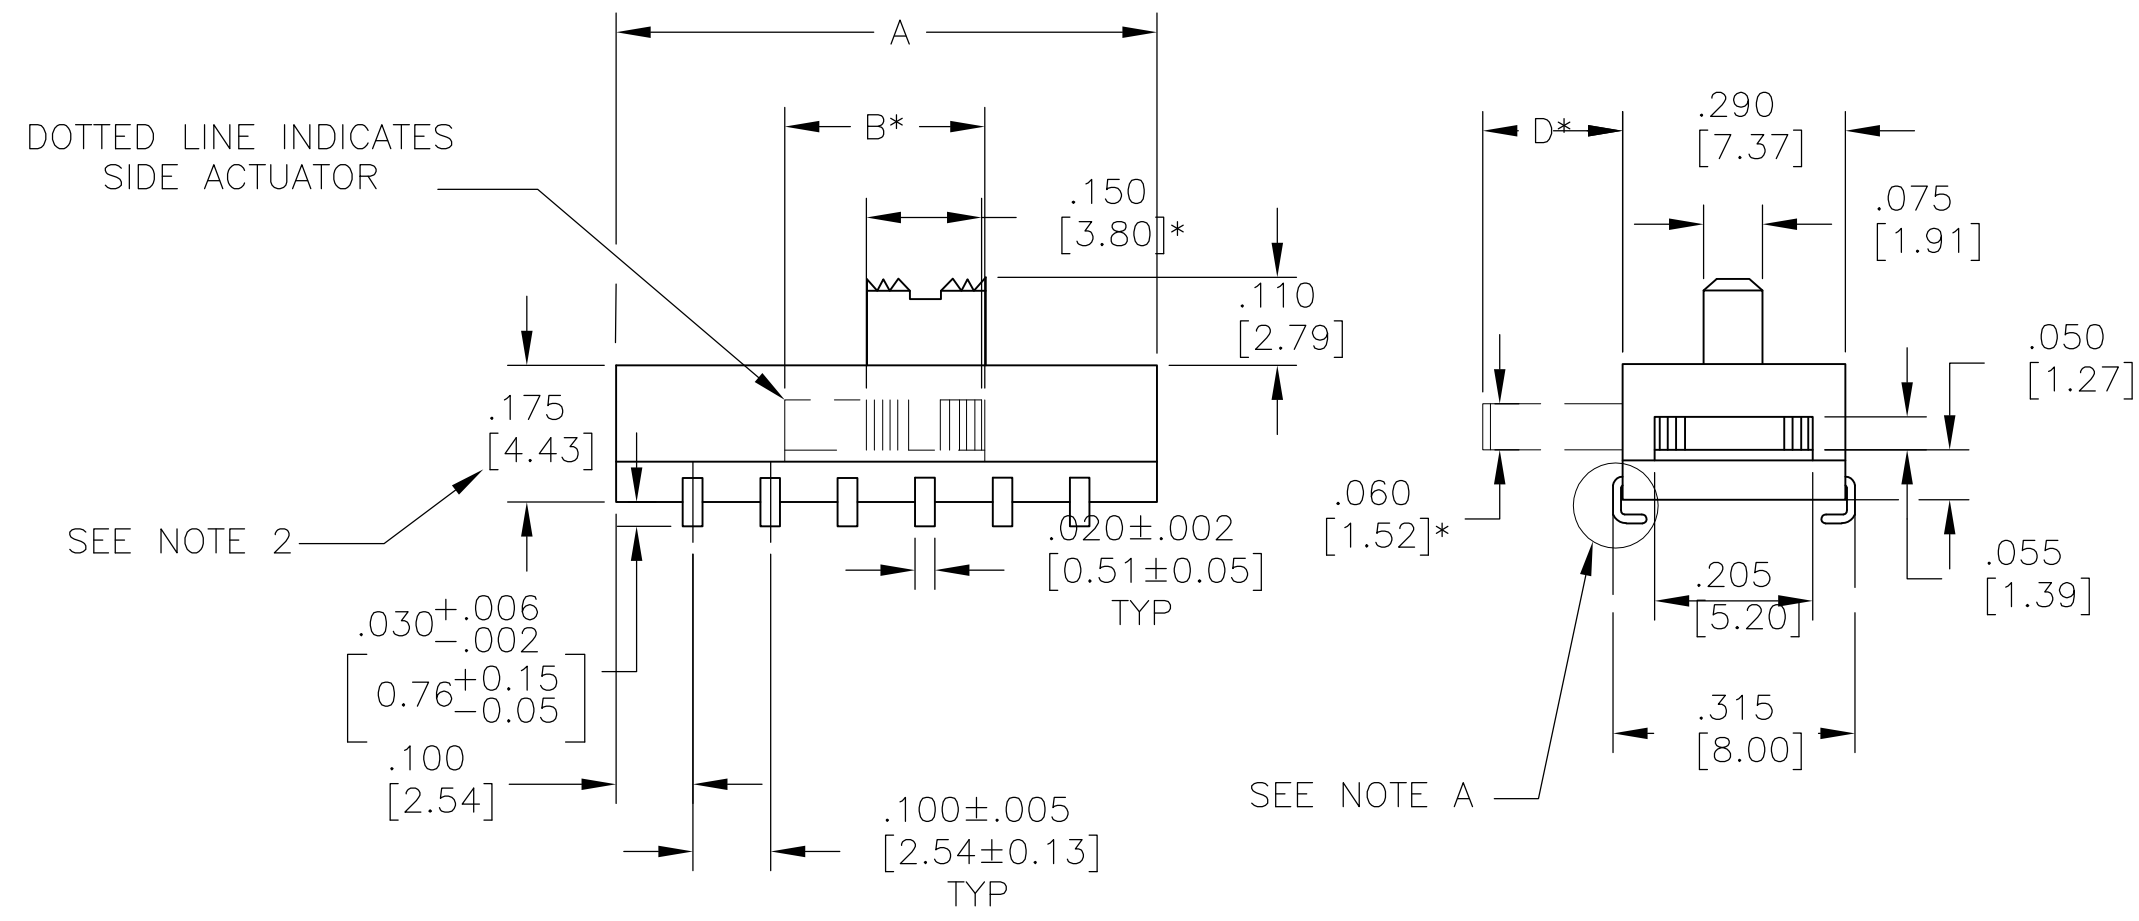


ASE


REVERSE "L" TYPE SURFACE MOUNT

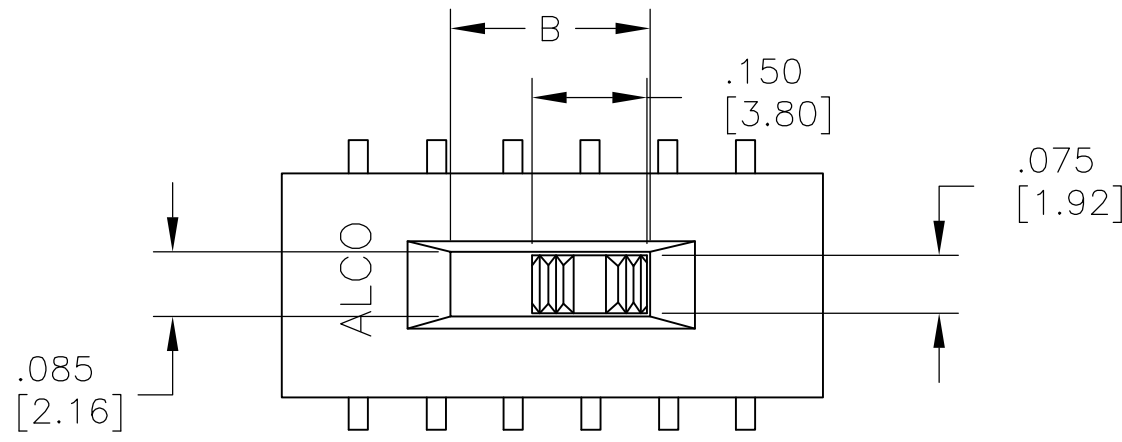


* SIDE ACTUATOR ONLY.

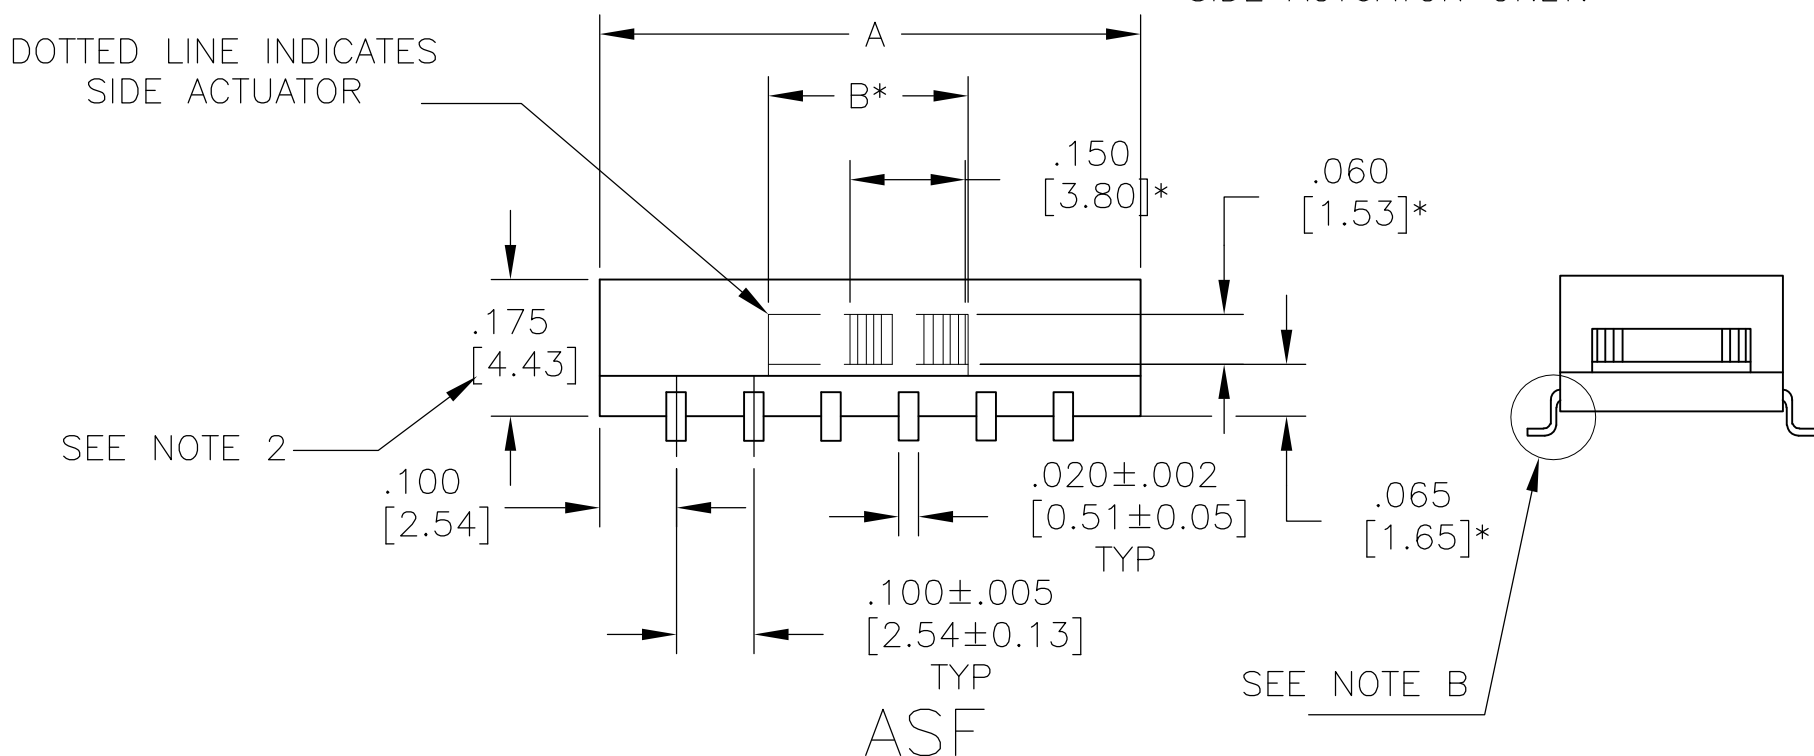

ASF

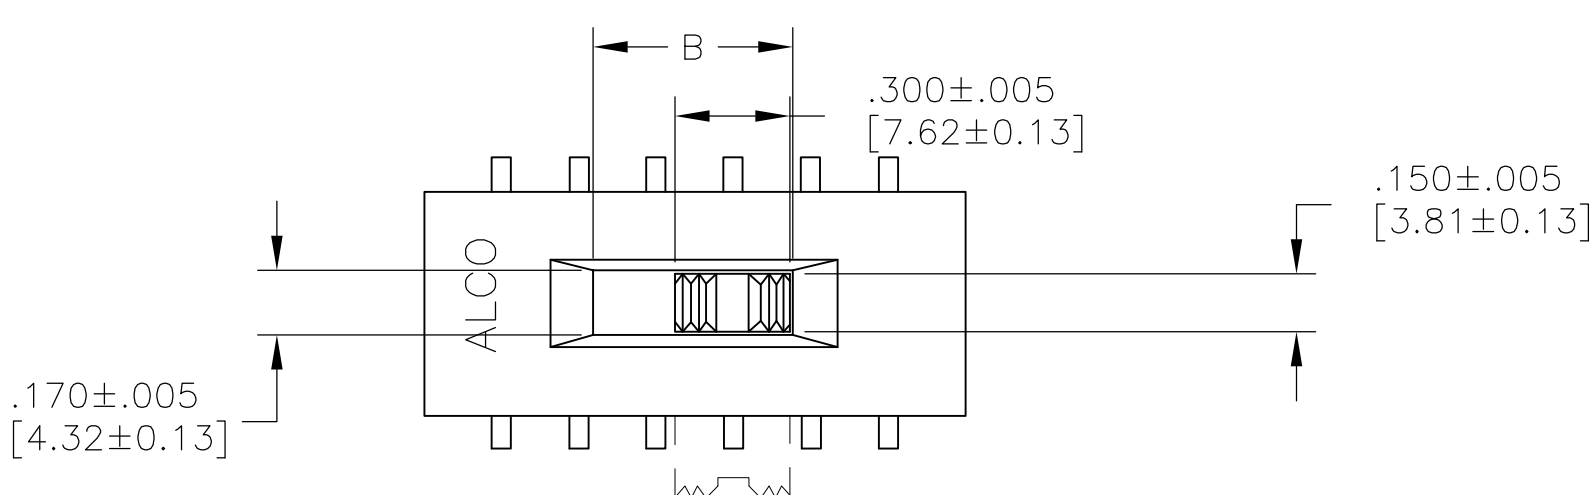


* SIDE ACTUATOR ONLY.

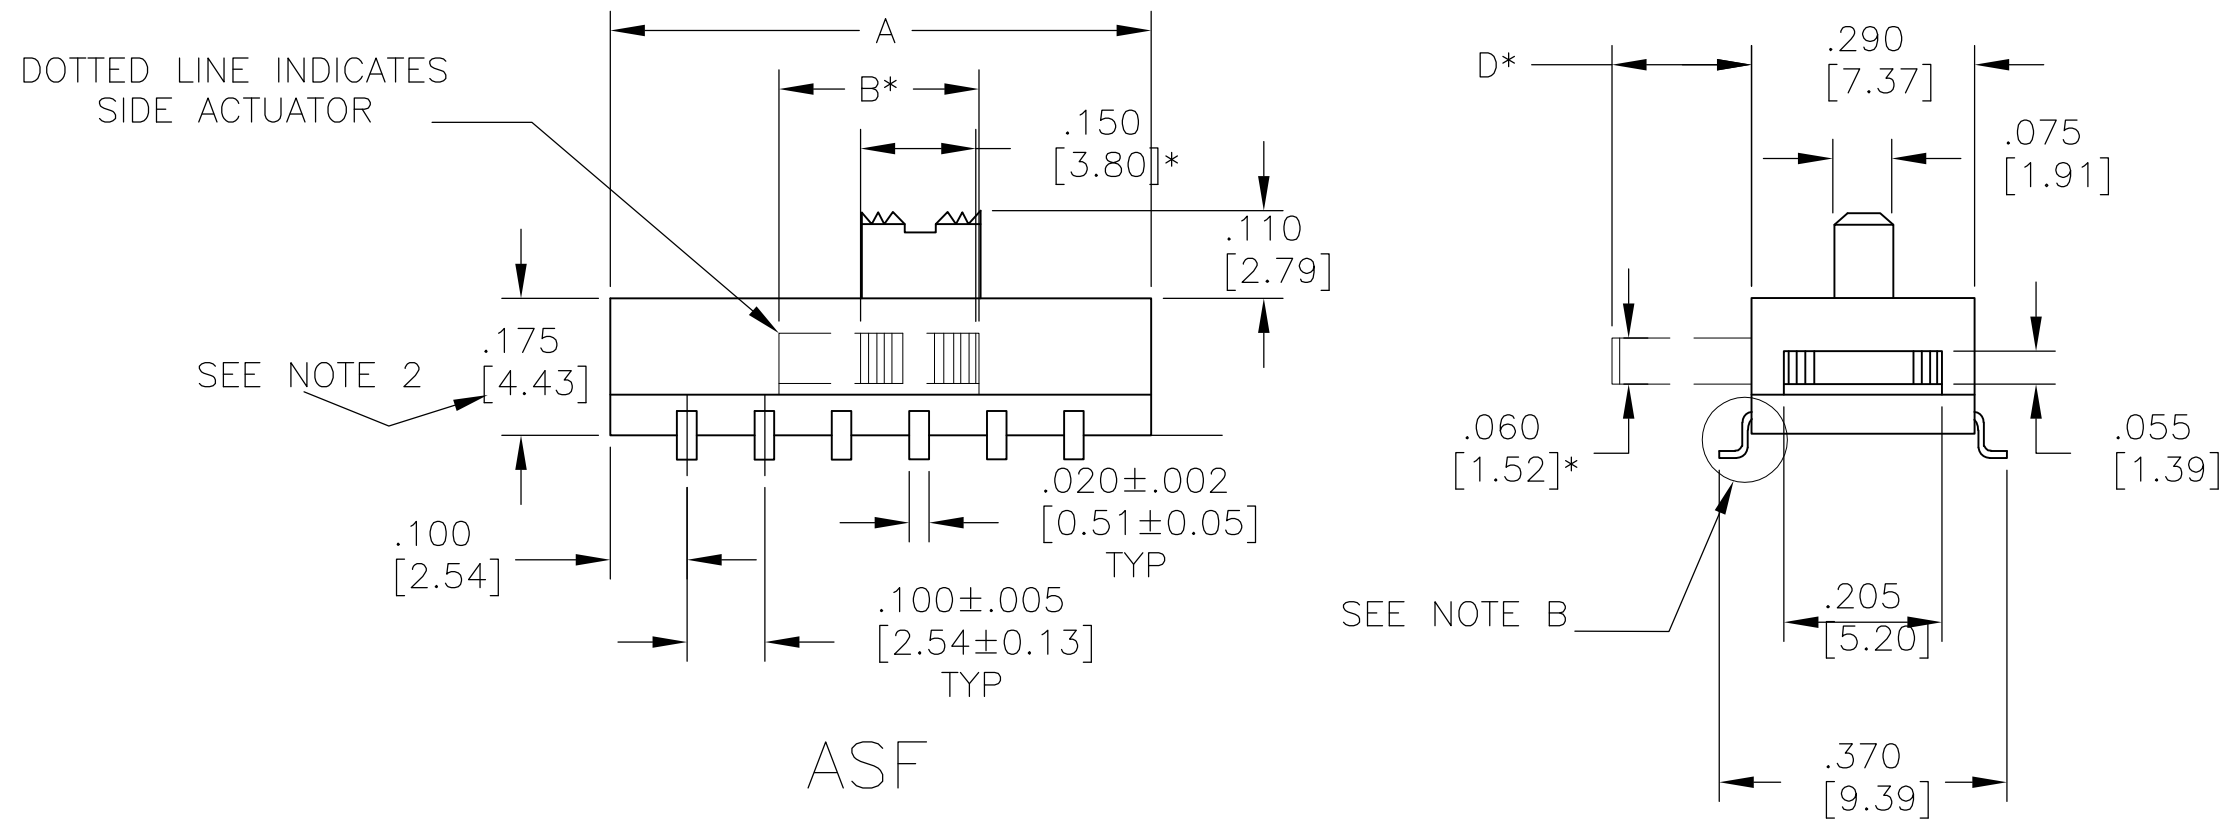


ASF

"L" TYPE SURFACE MOUNT

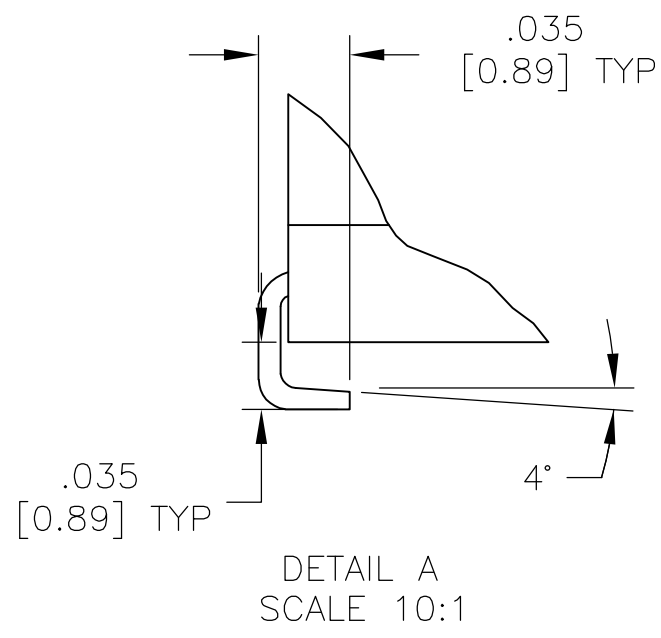

DETAIL A
SCALE 10:1

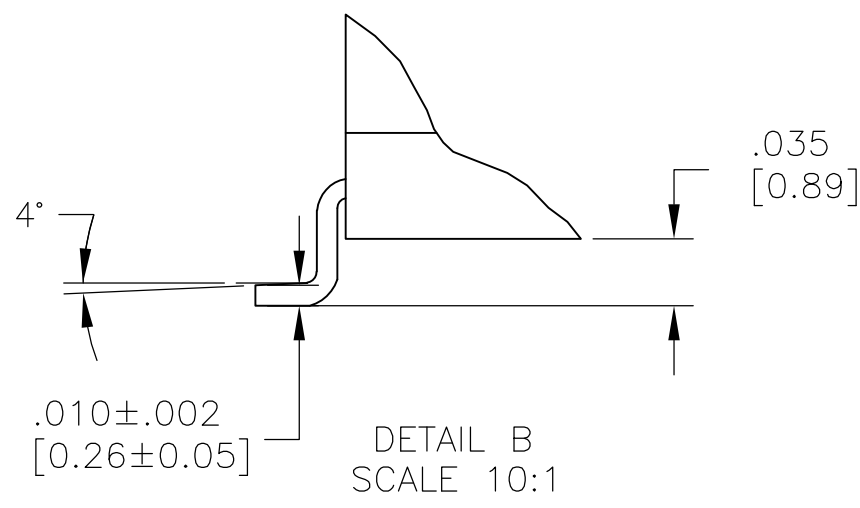

DETAIL B
SCALE 10:1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN M. BINNER	12JAN04	TE Connectivity	
DIMENSIONS: INCHES [mm]		CHK —	—		
	TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	SLIDE SWITCH ASE/ASF, AUTO-INSERTABLE, THRU-HOLE AND SURFACE MOUNT	
	0. PLC ± .		PRODUCT SPEC		
	1. PLC ± .		APPLICATION SPEC		
	2. PLC ± .		—		
MATERIAL SEE SPECIFICATIONS		FINISH —	WEIGHT —	SIZE A1	CAGE CODE 00779
				DRAWING NO. 1437581-2	RESTRICTED TO —
				CUSTOMER DRAWING	
				SCALE 4:1	SHEET 2 OF 2
					REV K2

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[8-1437581-8](#)