

# POWER TRANSFORMER CHASSIS MOUNT: TOROIDAL WORLD SERIES

# **VPT48-5200**

## **Electrical Specifications (@25C)**

1. Maximum Power: 250VA

2. Input Voltage: Series: 230VAC, 50/60Hz

Parallel: 115VAC, 50/60Hz

3. Output Voltage: Series: 48VAC CT @ 5.20A

Parallel: 24.0VAC @ 10.40A

4. Voltage Regulation: 7% TYP from full load to no load

5. Temperature Rise: 50°C TYP

6. Hipot: 4000VAC, Primary to Secondary

7. Efficiency: 90% TYP. @ full load

#### **Construction:**

The toroidal construction inherently helps reduce stray fields, increases efficiency and minimizes size compared to traditional EI transformers. Built with Class B (130°) insulation system.

## Safety:

World Series Transformers are designed and manufactured to meet most International Safety agency standards.

### Agency File:

UL: File E122529, UL 506

CE: EN 61558-1:2005, EN 61558-2-6:1995, Low Voltage Directive (LVD) EN 6-000-6-6:2001+A11:2004, EN 55014-1:2000+A1:2001+A2:2002, EN 6100-6-1:2001, EN 55014-2:1997+A1:2001, Electromagnetic Compatibility (EMC)



Dimensions (mm):

H*	I.D.	O.D.
58.0 Max	31.0 Min	112.0 Max

\*Add 3mm to the height for mounting hardware Weight: 2.2Kg

#### Mounting:

Transformer is provided with one metal mounting plate, two rubber pads, M6 x 65mm bolt, nut, spring and flat washer.

#### **Connections:**

Transformer is provided with 8" (200mm) long, 0.25" (6mm) stripped and tinned, stranded UL 1015 lead wire. Primaries are 20AWG, Secondaries are 16AWG.

Input<sup>1</sup>: Series – BLUE and BROWN, Jumper GRAY to VIOLET

Parallel – BLUE and BROWN, Jumper BLUE to VIOLET, GRAY to BROWN

Output<sup>1</sup>: Series – BLACK and YELLOW, Jumper RED to ORANGE

Parallel - BLACK and YELLOW, Jumper BLACK to ORANGE, RED to YELLOW


**RoHS Compliance:** As of manufacturing date February 2005, all standard products meet the requirements of 2011/65/EU, known as the RoHS initiative.


\* Upon printing, this document is considered "uncontrolled". Please contact Triad Magnetics' website for the most current version.

Web: www.TriadMagnetics.com Phone 951-277-0757 Fax 951-277-2757

460 Harley Knox Blvd. Perris, California 92571



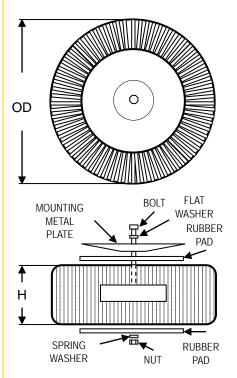



Publish Date: September 7, 2016

 $<sup>^{\</sup>mathrm{1}}$  Primary and secondary windings are designed to be connected in series or parallel. Windings are not intended to be used independently.

# **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Triad Magnetics: VPT48-5200