

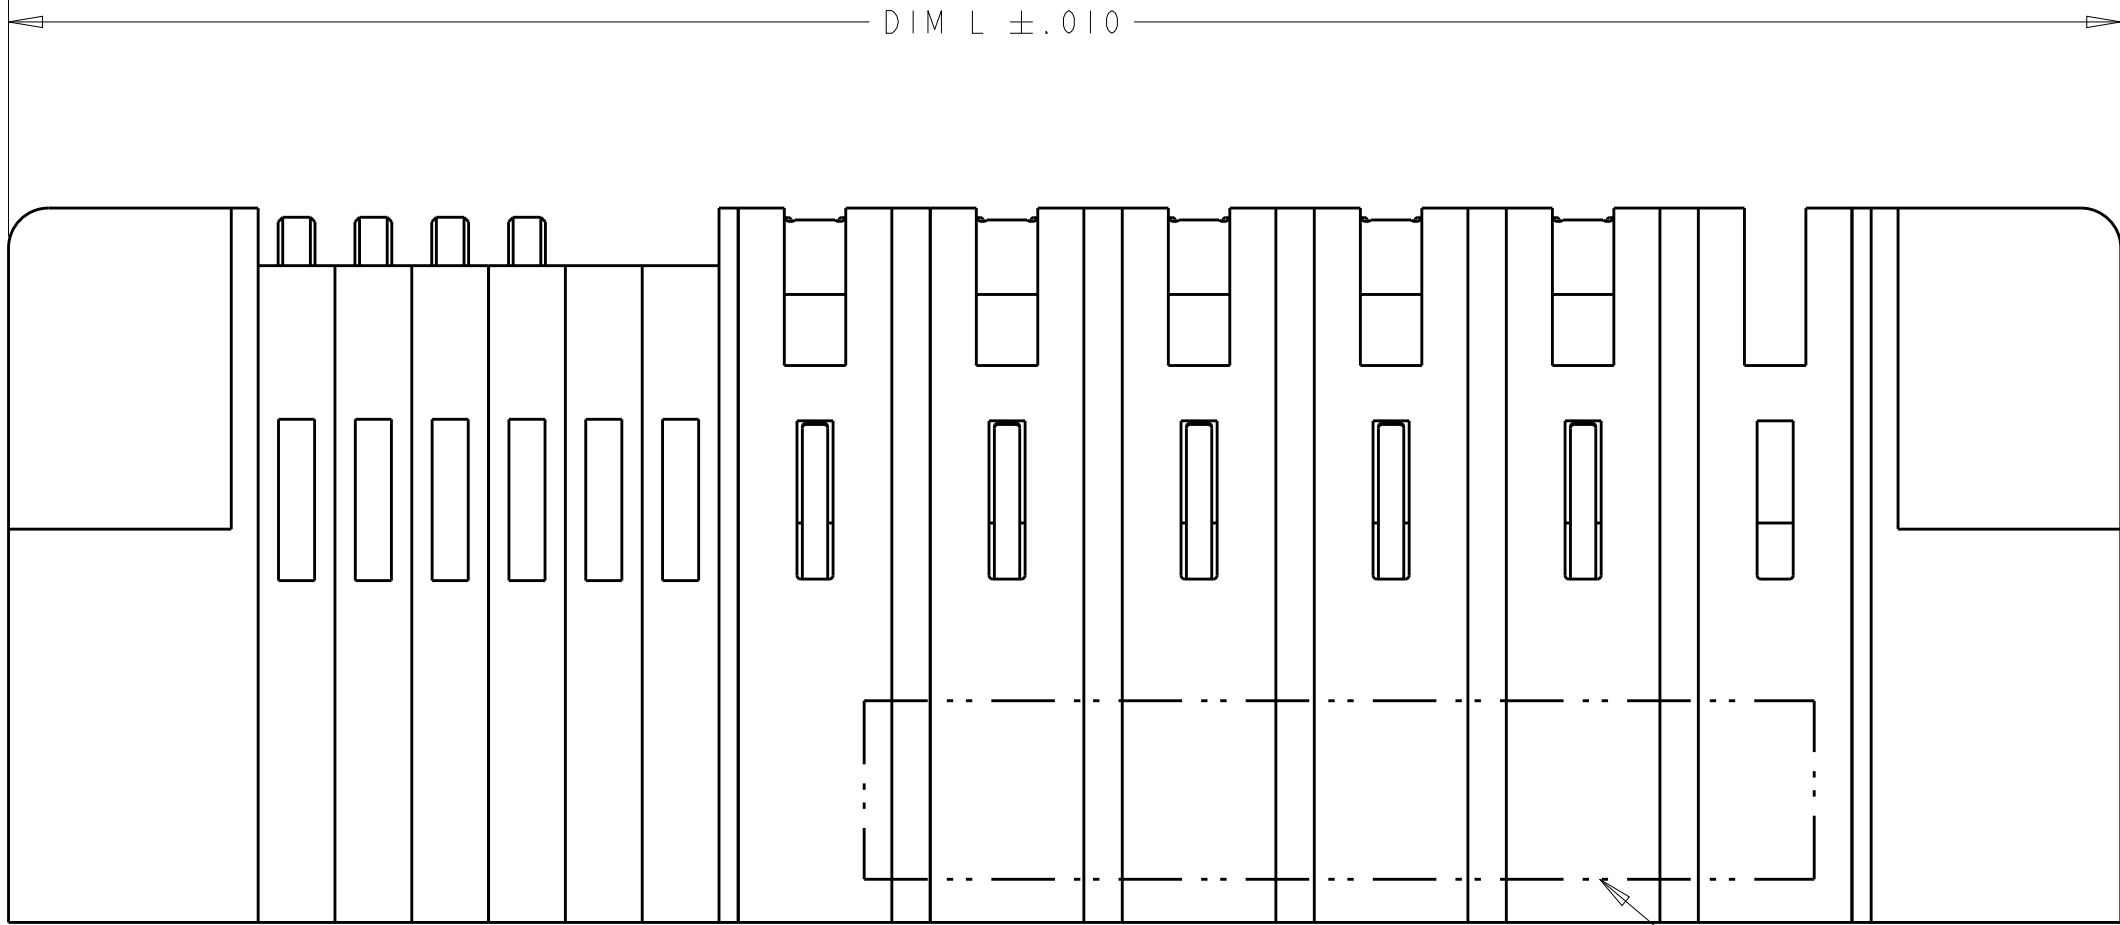
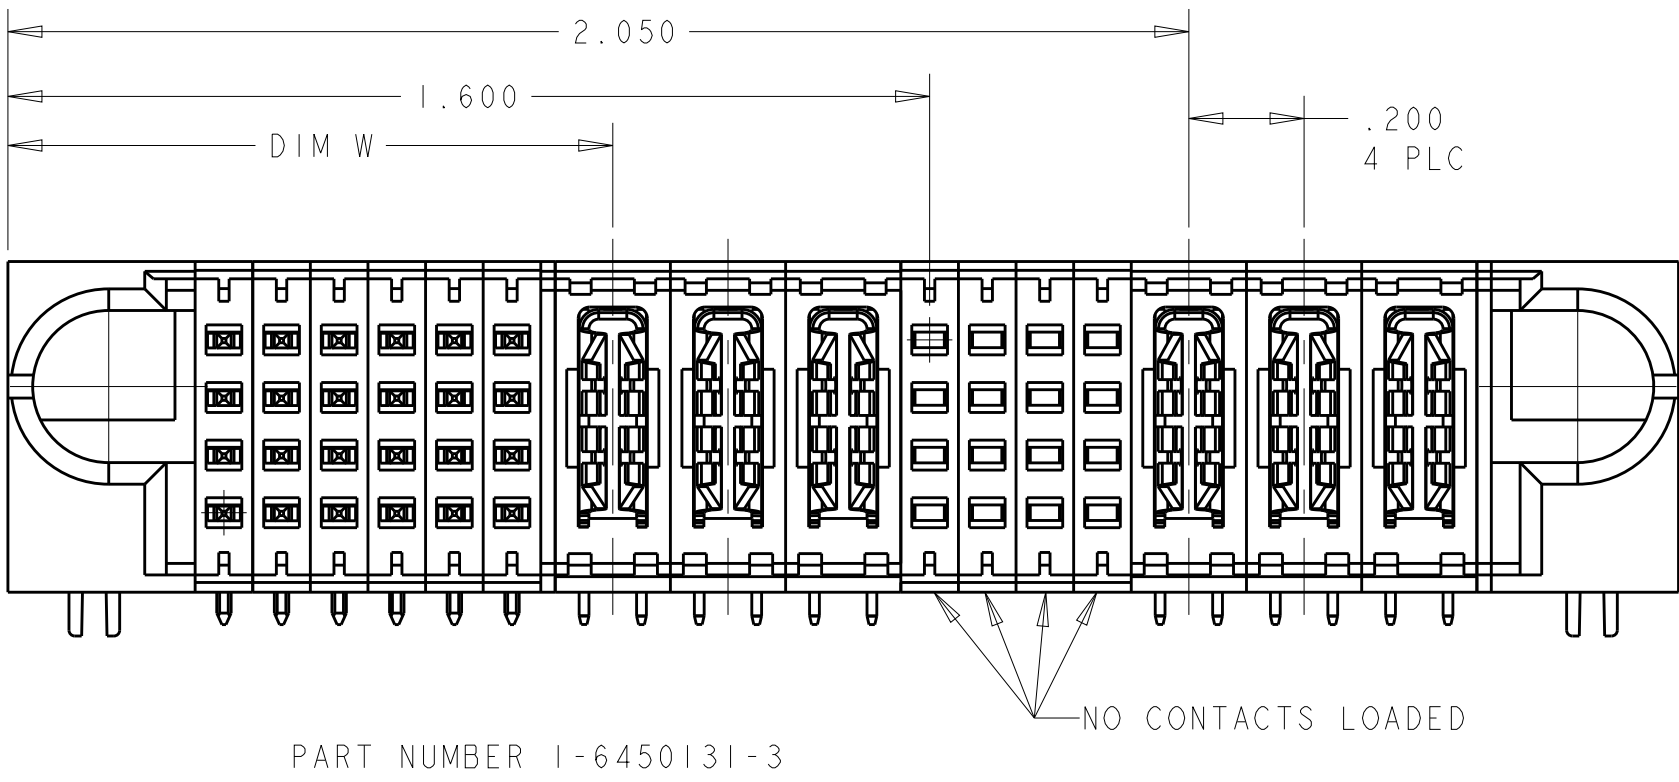
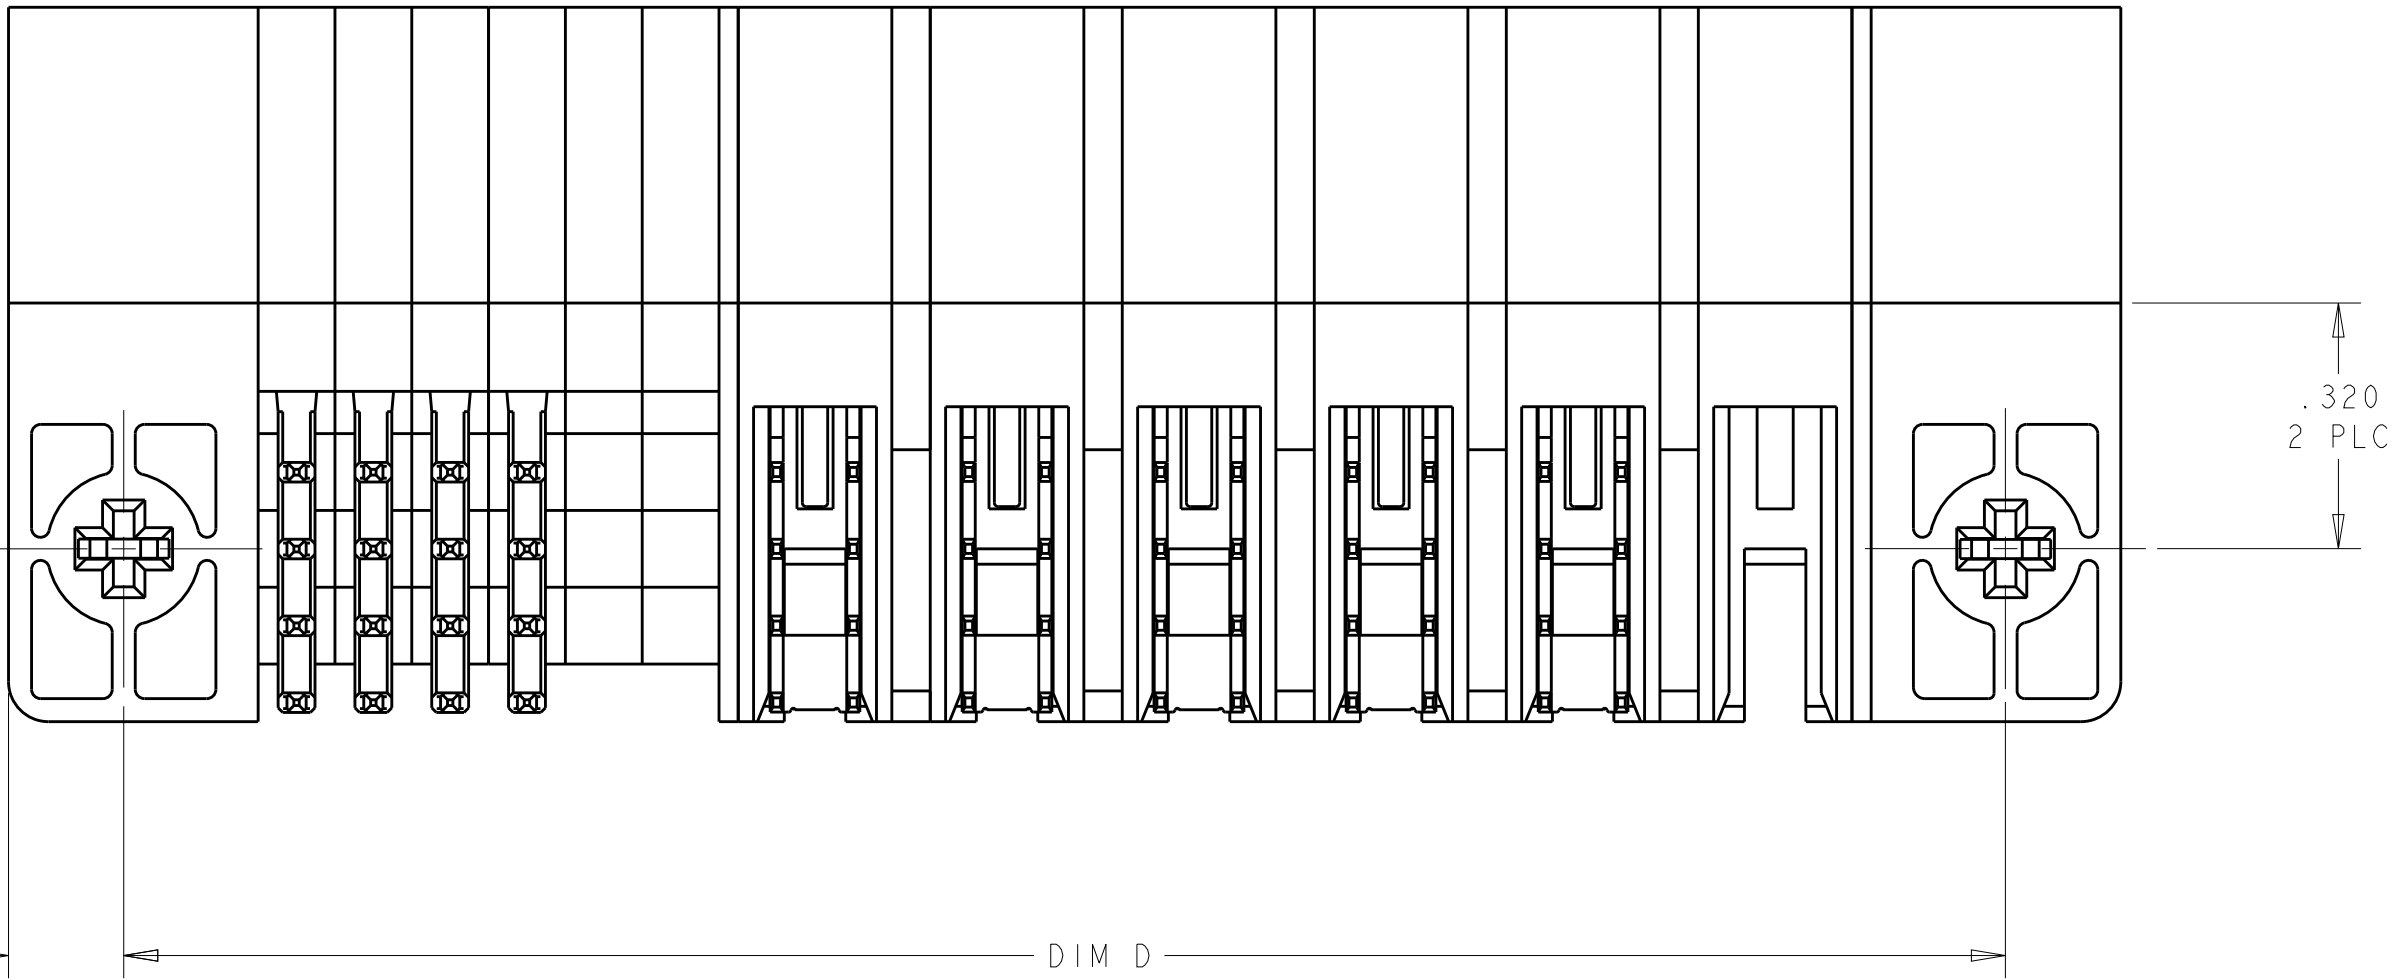


LOC		DIST		REVISIONS				
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD	
		E8		REV PER ECR-12-021802	04JAN2013	ML	SZ	
		E9		ADD NEW DASH NUMBER 2-3	21MAY2013	CZ	SZ	

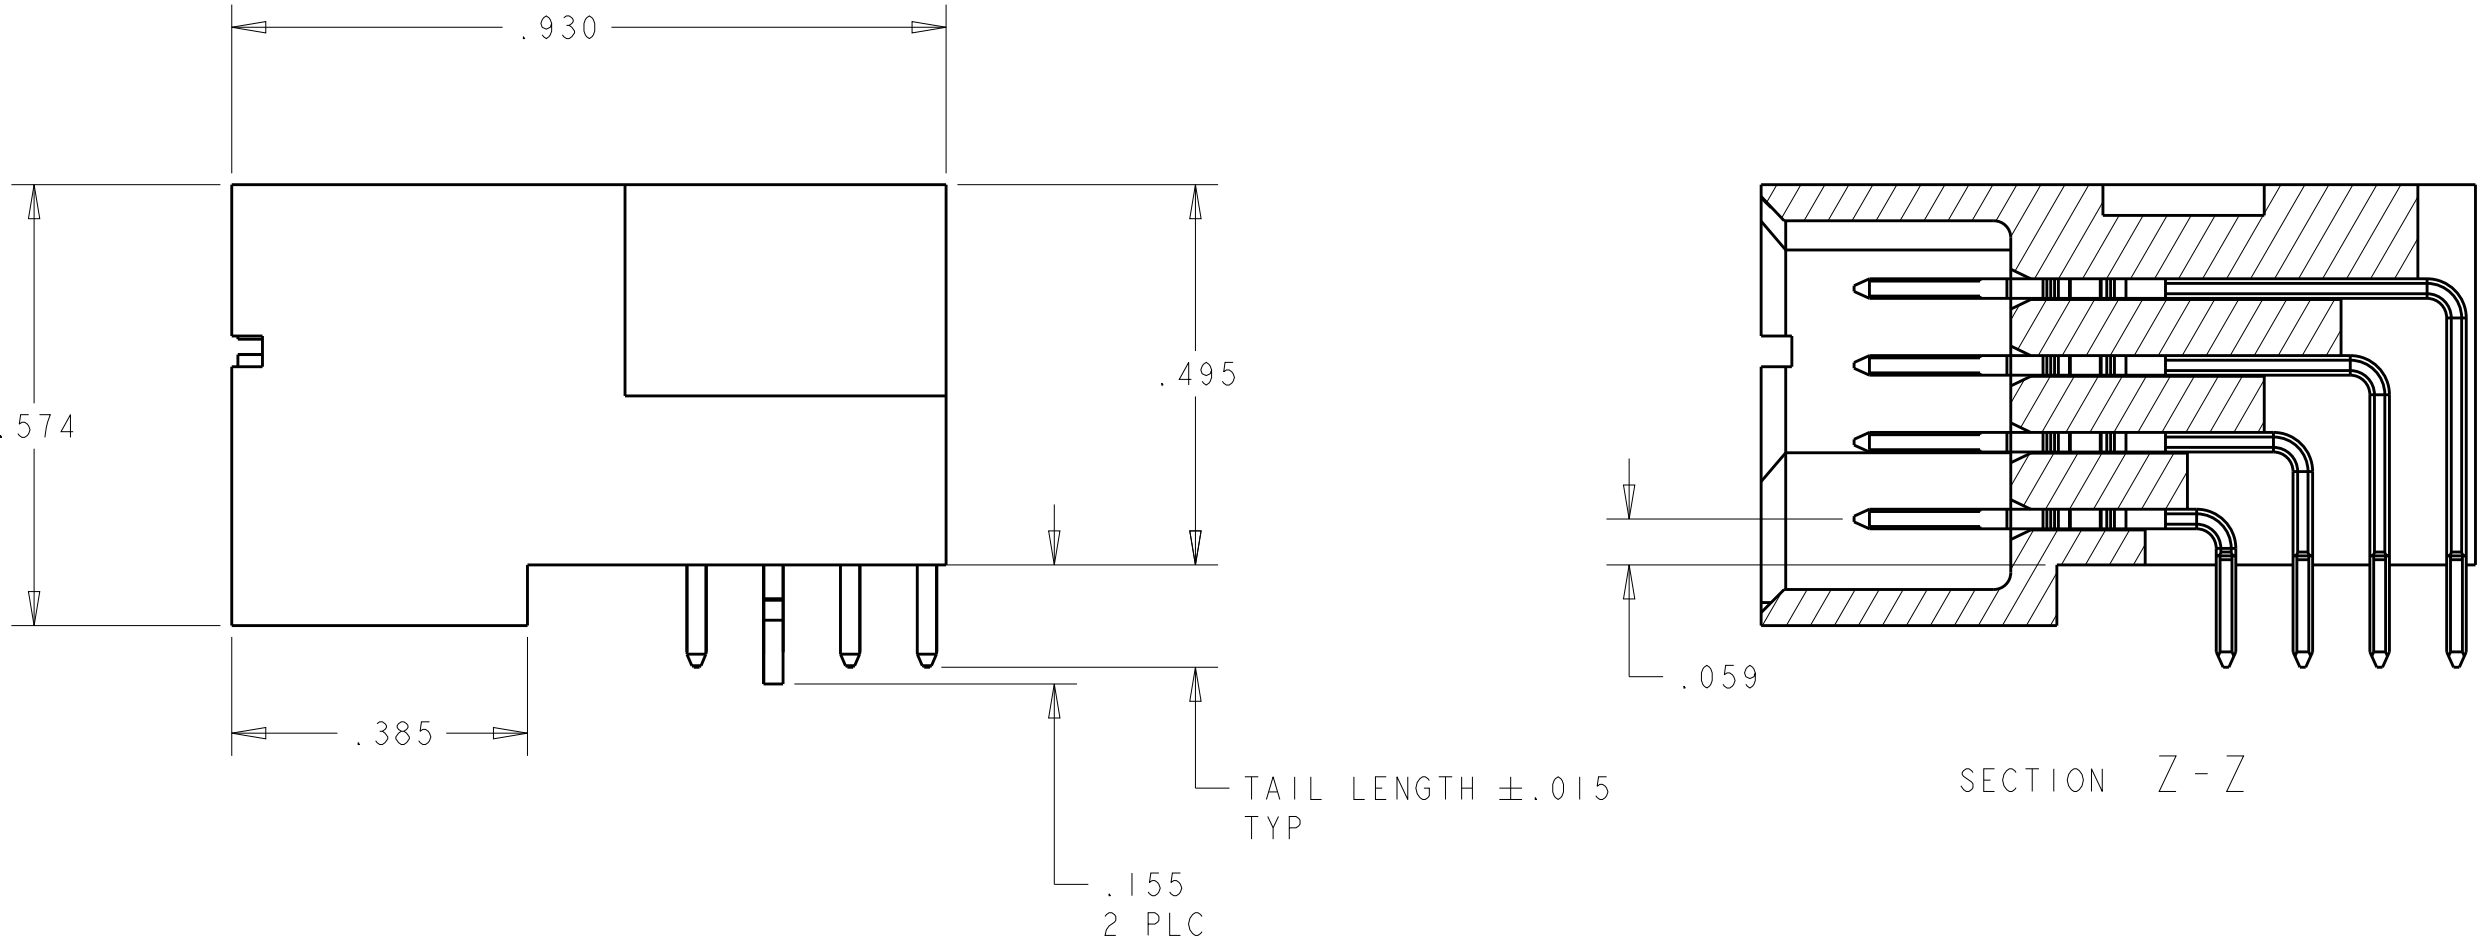




- ⚠ "AMP", PART NUMBER, AND DATE CODE TO BE MARKED IN AREA SHOWN.
- ⚠ MATERIAL: HOUSING - GLASS FILLED HIGH TEMP THERMO PLASTIC, UL94 V-0
SIGNAL CONTACT - COPPER ALLOY
POWER CONTACT - HIGH CONDUCTIVITY COPPER ALLOY
- ⚠ CONTACT PLATING: NOBLE METAL PLATING ON CONTACT FUNCTIONAL AREA OF POWER CONTACTS AND SIGNAL CONTACTS.
- ⚠ MECHANICAL CONNECTOR KEEP OUT ZONE.
- ⚠ DATUM AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER.
- ⚠ PCB - ALL HOLE DIAMETERS ARE FINISHED HOLE SIZES.
- ⚠ PCB - .0453±.0010 DRILLED HOLES PLATED WITH .0003 MIN Sn OVER .001 TO .003 CU PLATING TO ACHIEVE A .040±.003 DIA HOLE

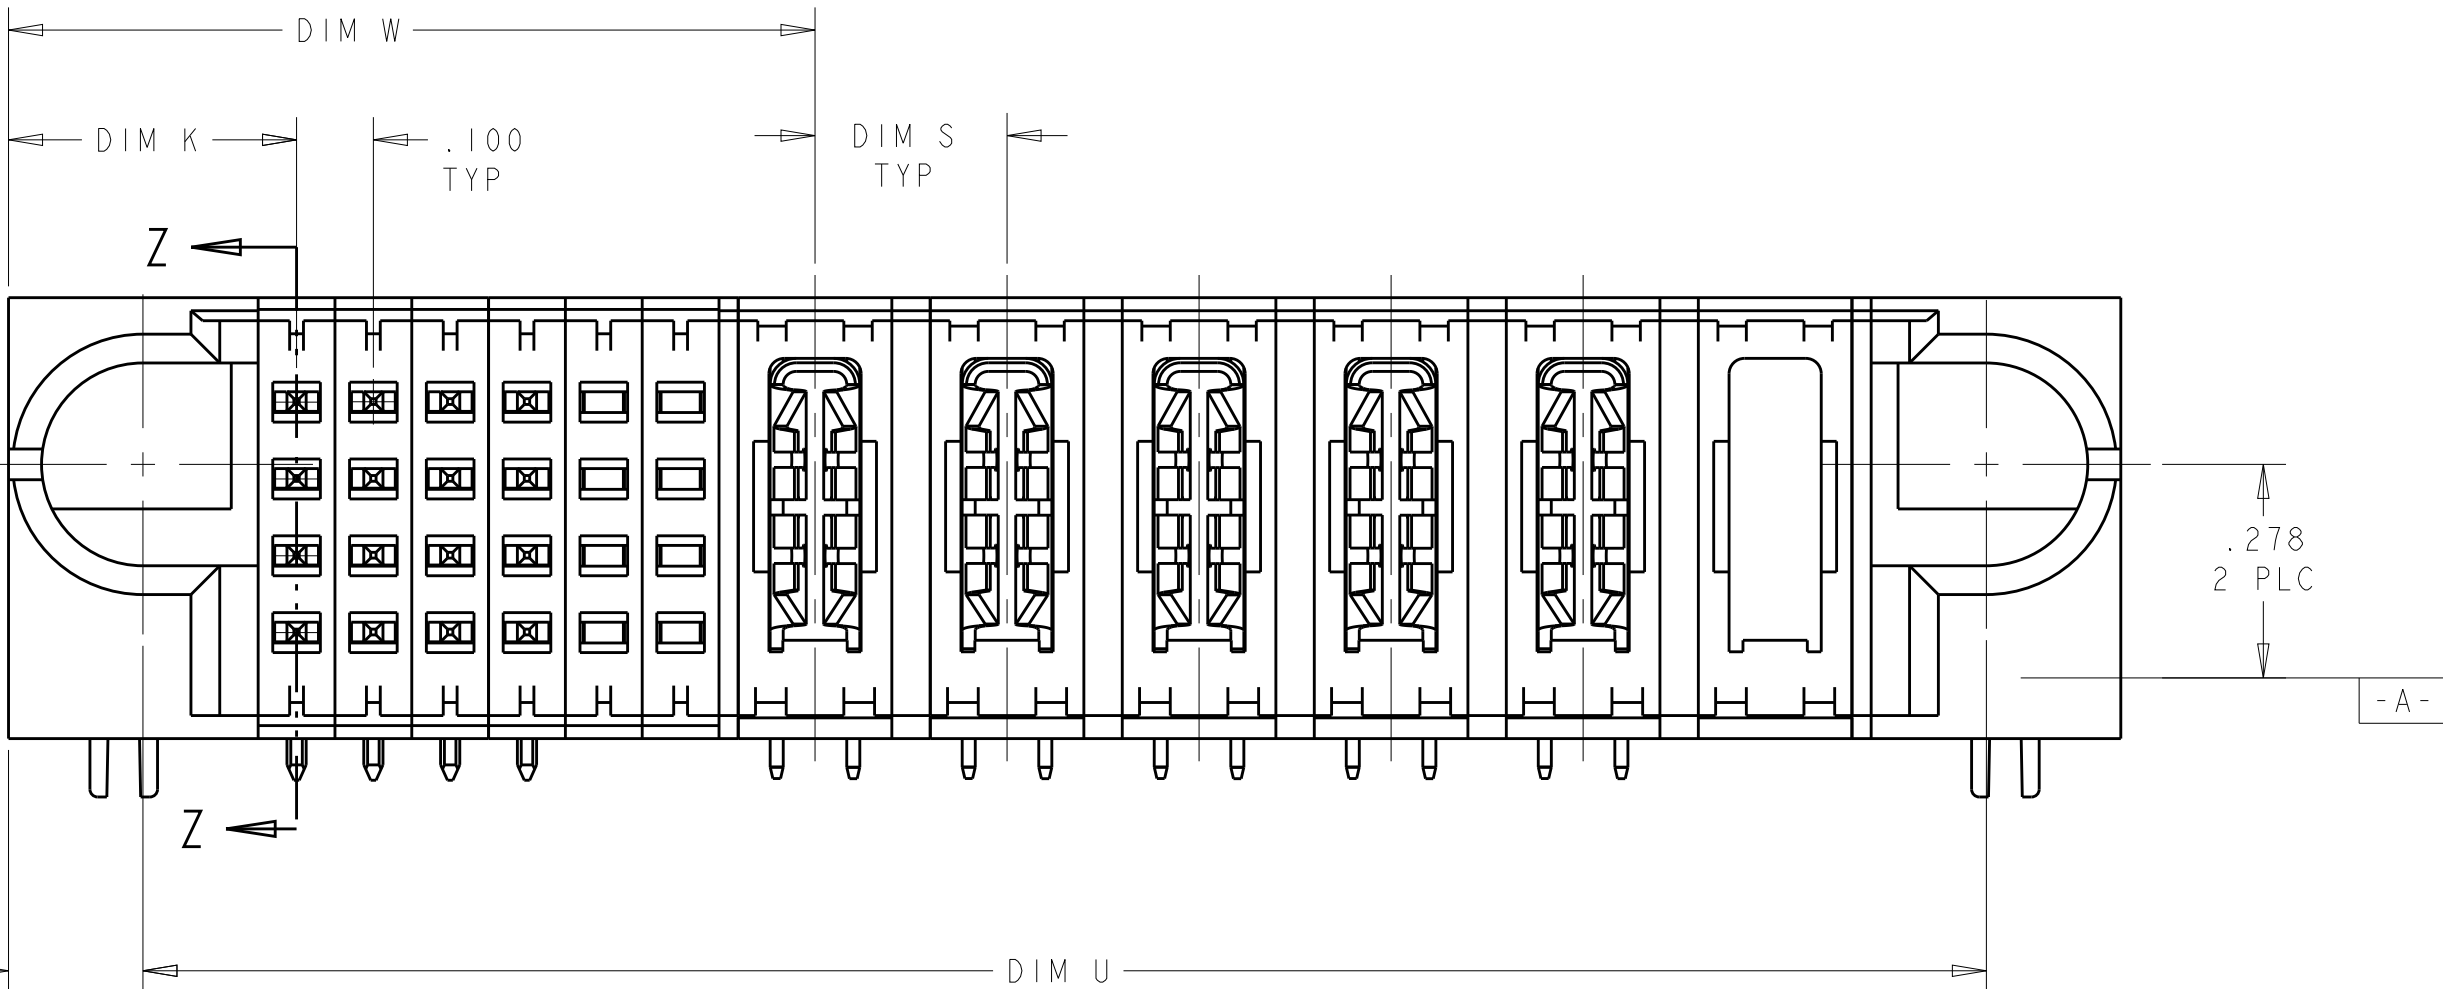

PART NUMBER 1-6450131-3

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R. GRZYBOWSKI 15FEB05	 TE Connectivity						
		CHK M. PERCHERKE 15FEB05							
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME					
		APVD W. PERCHERKE -		RIGHT ANGLE HEADER ASSY SOLDER CONTACTS, W/GUIDES MULTI-BEAM XL					
		PRODUCT SPEC							
		108-1973							
		APPLICATION SPEC							
		114-13038							
MATERIAL		FINISH		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO		
-		-		A1	00779	C=6450131	-		
CUSTOMER DRAWING				SCALE	1:1	SHEET	1 OF 9	REV	E9

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
ES	00	-	-	SEE SHEET 1	-	-	-

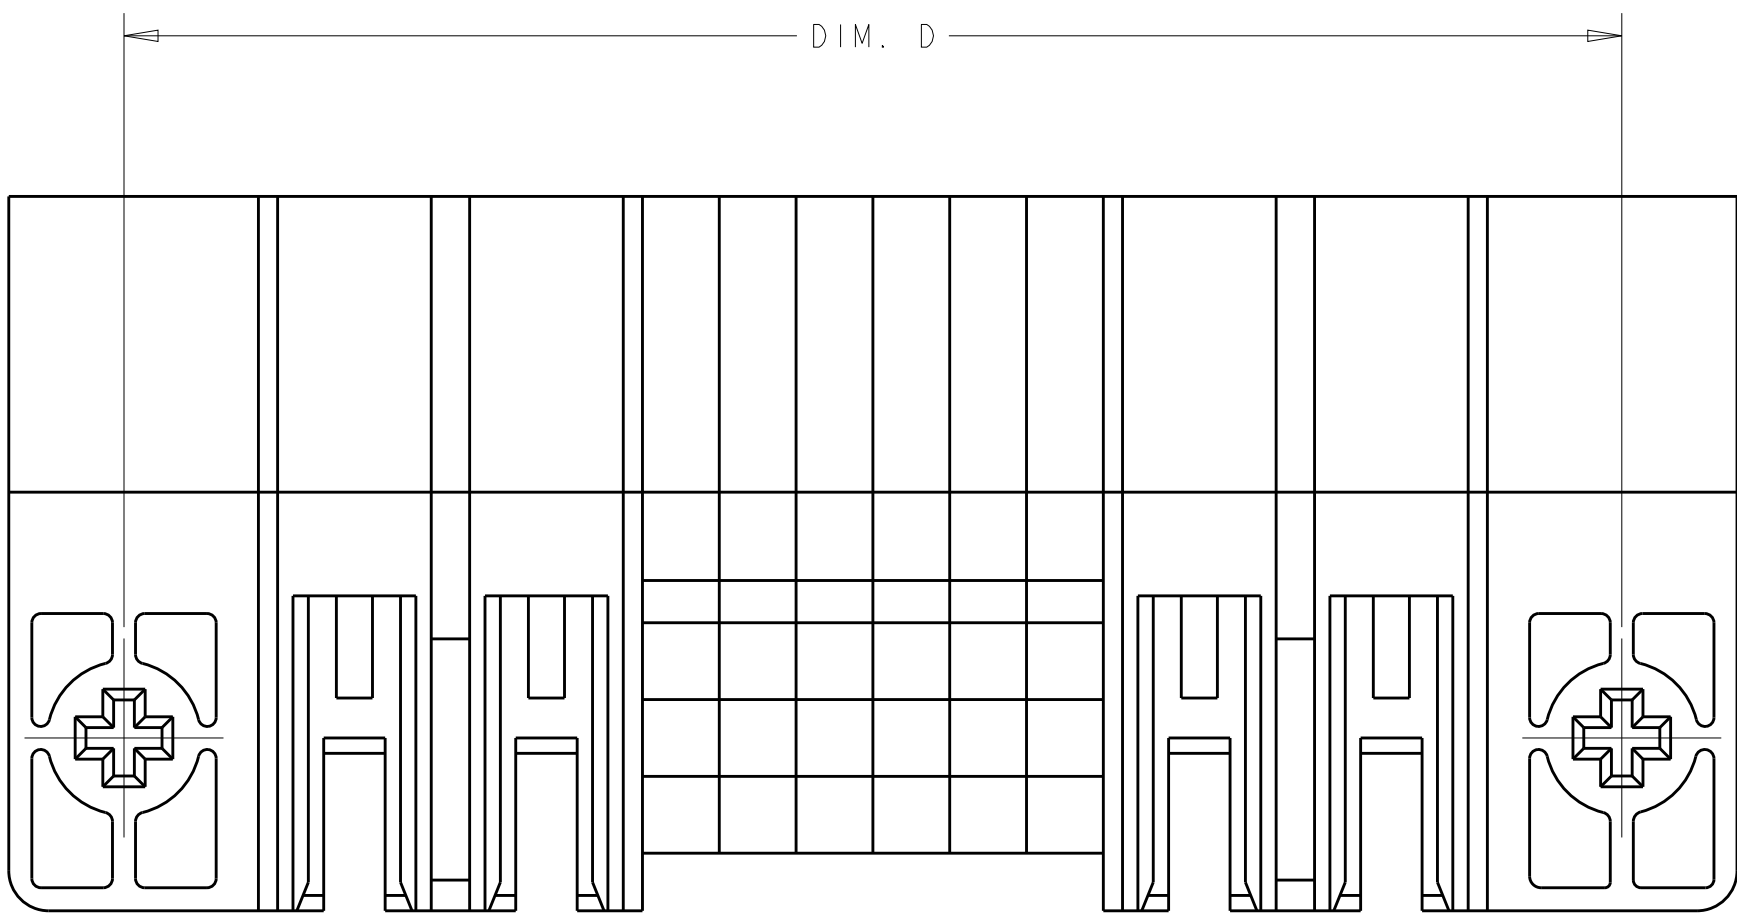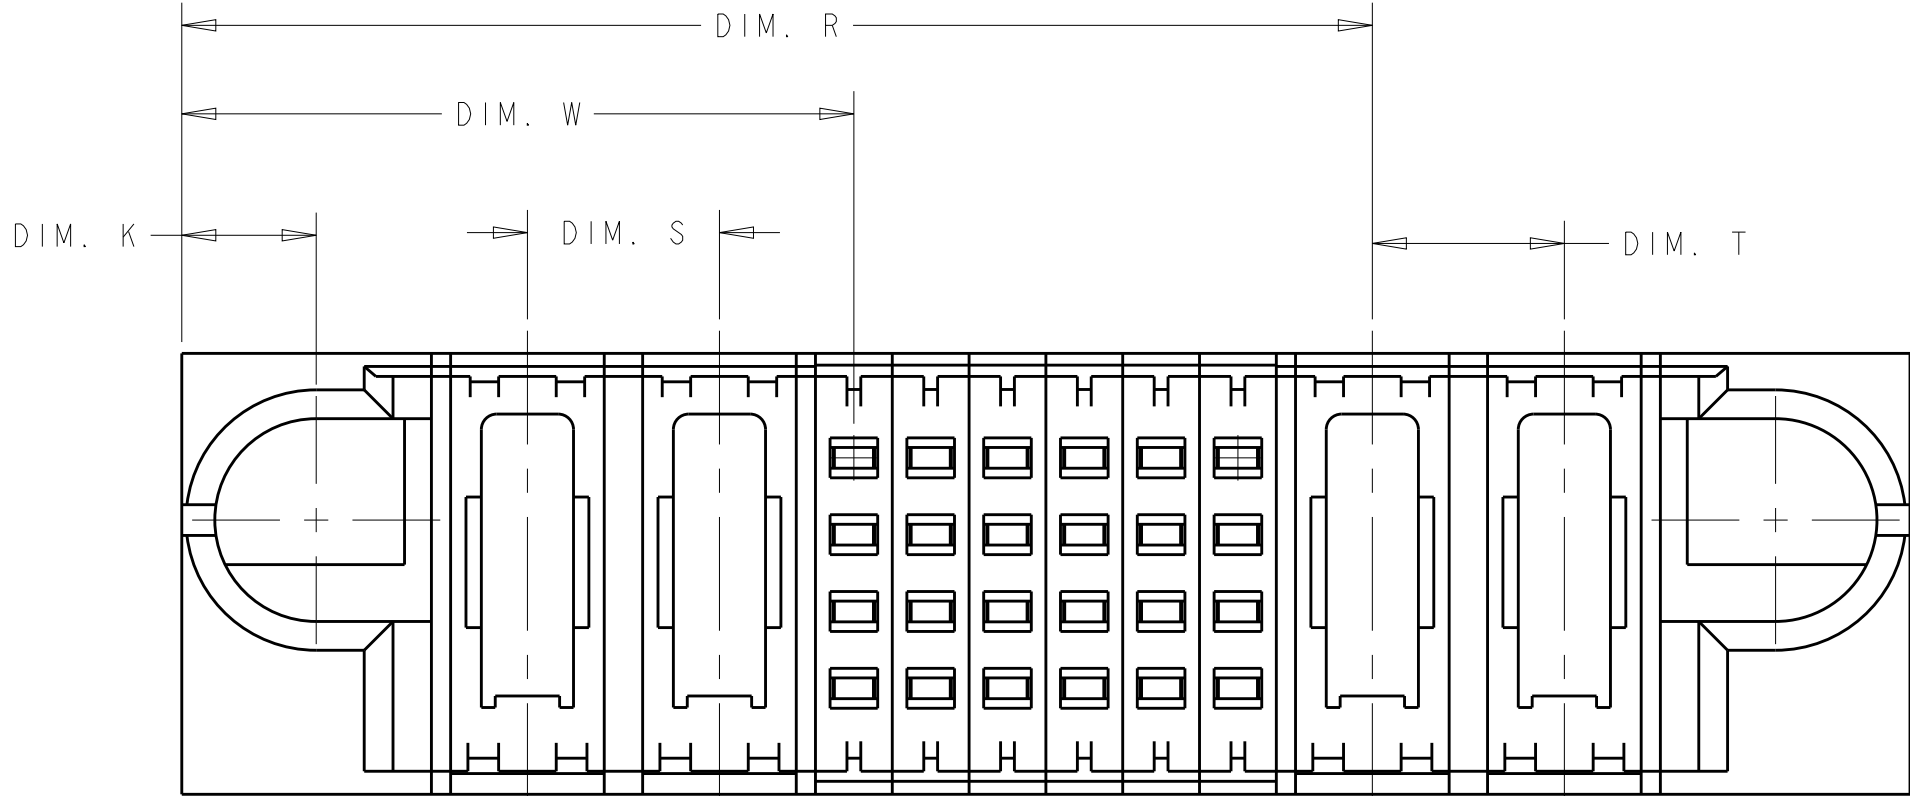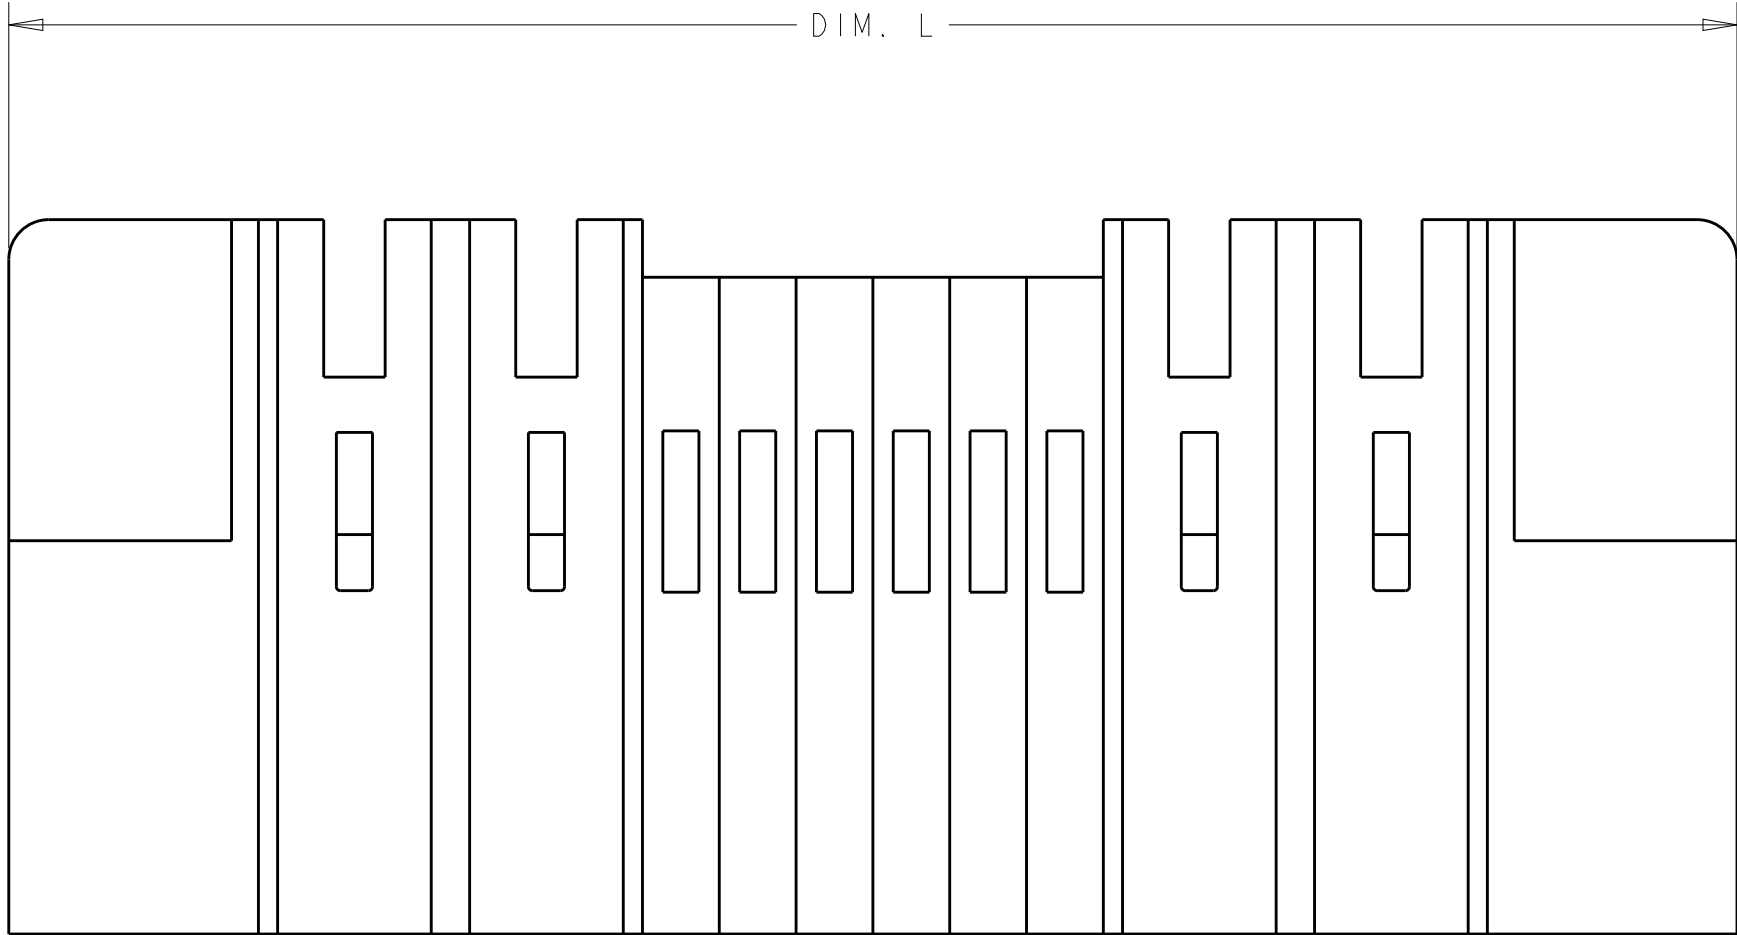

PART 2-6450131-1
(NO CONTACT VIEW)

E9	-	-	4.650	.250	.400	4.700	1.800	5.000	52S + 12P	2-6450131-3
	-	-	1.700	.250	.375	1.750	.850	2.050	16S + 4P	2-6450131-2
	1.550	.250	1.900	.250	.450	1.950	.875	2.250	24S	2-6450131-1
			1.600	.250	.375	1.650	.750	1.950	12S + 4P	1-6450131-9
			3.650	.250	.400	3.700	1.300	4.000	32S + 10P	1-6450131-8
			2.950	.200	.375	3.000	1.050	3.300	24S + 10HDP	1-6450131-7
			2.400	.250	.375	2.450	1.050	2.750	24S + 6P	1-6450131-6
			2.450	.200	.375	2.500	.950	2.800	20S + 8P	1-6450131-5
			2.400	.250	.375	2.450	1.050	2.750	24S + 6P	1-6450131-4
			2.550	.200	.375	2.600	1.050	2.900	24S + 3P + 16S + 3P	1-6450131-3
			2.500	.250	.425	2.550	.875	2.850	12S + 7P	1-6450131-1
			2.400	.250	.375	2.450	1.050	2.750	24S + 6P	6450131-7
			2.700	.300	.375	2.750	.775	3.050	12S + 7ACP	6450131-6
			2.400	.250	.375	2.450	1.050	2.750	24S + 6P	6450131-5
			4.400	.250	.375	4.450	1.050	4.750	24S + 14P	6450131-4
			1.950	.250	.375	2.000	.850	2.300	16S + 5P	6450131-3
	DIM R	DIM T	DIM U	DIM S	DIM K	DIM D	DIM W	DIM L	DESCRIPTION	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:

INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ±.01

1 PLC ±.01

2 PLC ±.01

3 PLC ±.005

4 PLC ±.002

ANGLES ±2°

FINISH

MATERIAL

-

DWN R. GRZYBOWSKI

CHK M. PERCHERKE

APVD W. PERCHERKE

PRODUCT SPEC 108-1973

APPLICATION SPEC 114-13038

WEIGHT

CUSTOMER DRAWING

15FEB05

15FEB05

NAME

RIGHT ANGLE HEADER ASSY
SOLDER CONTACTS, W/GUIDES
MULTI-BEAM XL

SIZE A1

CAGE CODE 00779

DRAWING NO 6450131

RESTRICTED TO





TE Connectivity


SCALE 1:1

SHEET 2 OF 9


REV E9

LOC	DIST	REVISIONS			
		P	LTR	DESCRIPTION	DATE
ES	00	-	-	SEE SHEET 1	-


PART NUMBER	ROWS		SIGNAL				POWER					
			1	2	3	4	P1	P2	P3	P4	P5	
6450131-3	D		J	J	J	J	PM	PM	PM	PM	PM	
	C		K	K	K	K						
	B		N	N	N	N						
	A		S	S	S	H						
16S + 5P												

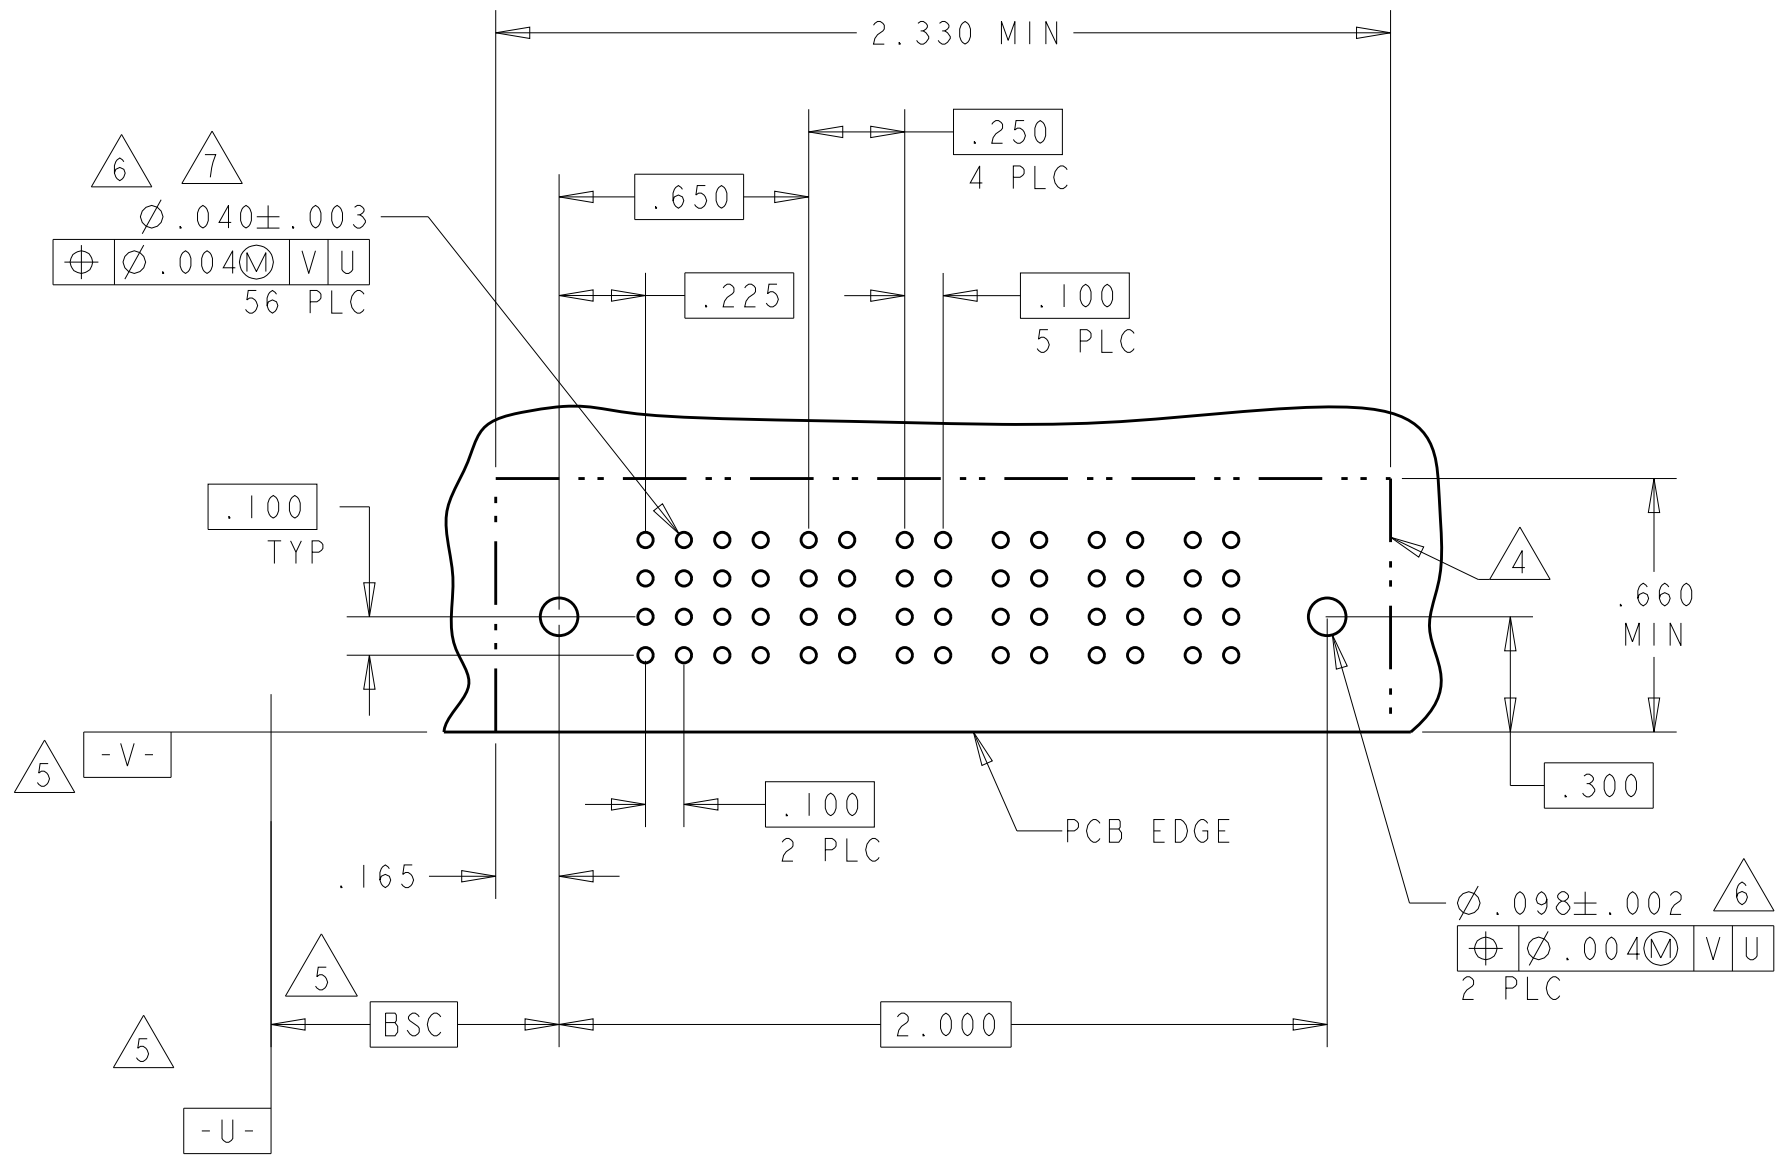

PART NUMBER	ROWS		SIGNAL						POWER						
			1	2	3	4	5	6	P1	P2	P3	P4	P5	P6	
6450131-5	D		J	J	J	J	J	E	PM	PM	PM	PM	PM	PM	
	C		K	K	K	K	K	K							
	B		N	N	N	N	N	N							
	A		H	S	S	S	S	S							
24S + 6P															

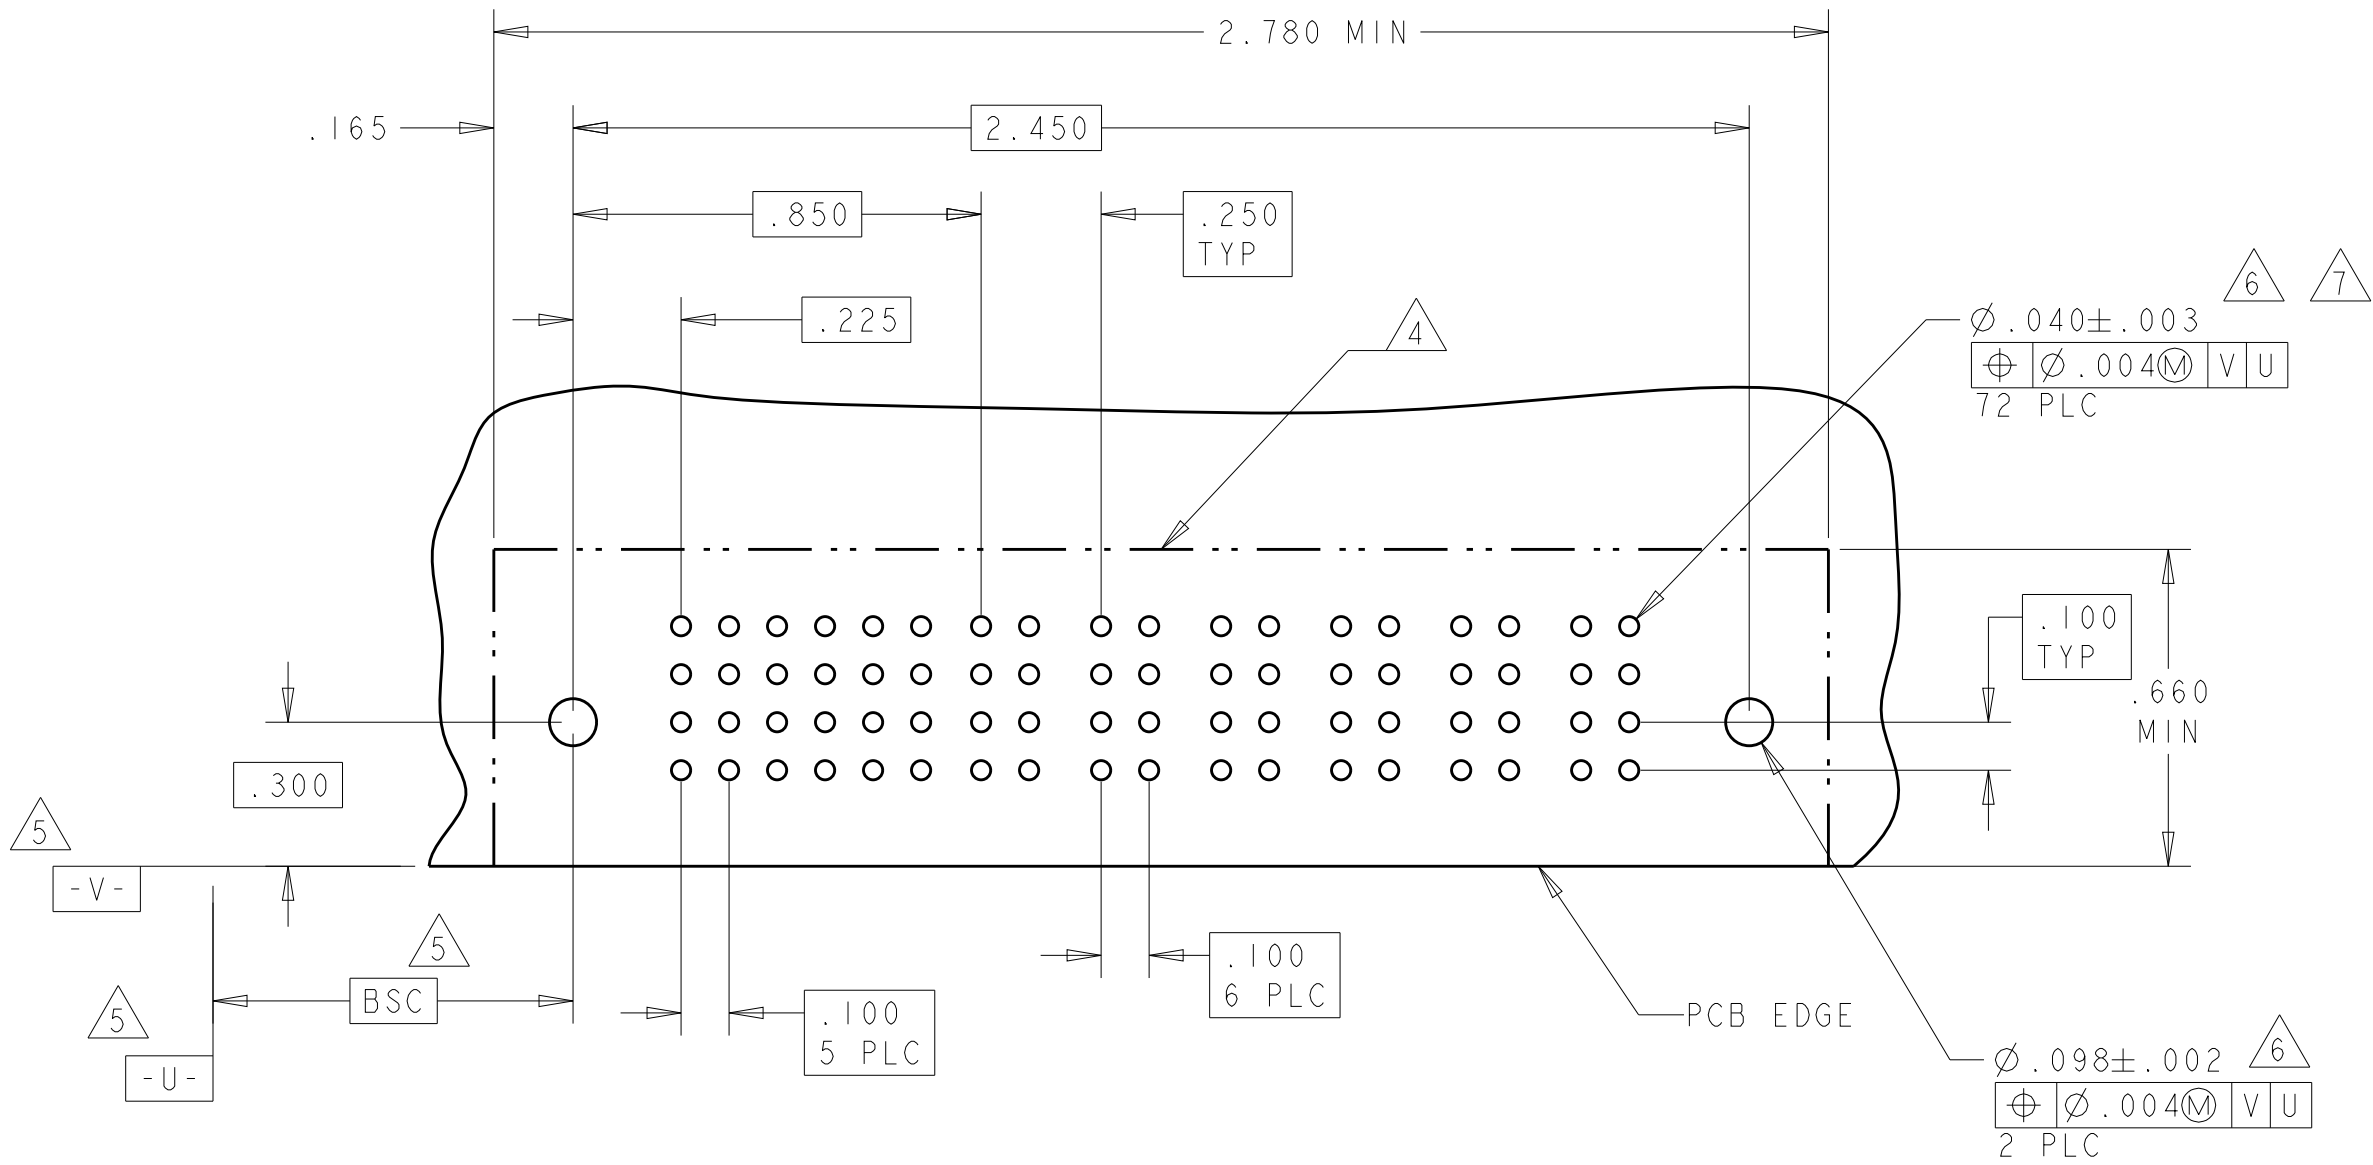

PART NUMBER	ROWS		SIGNAL						POWER														
			1	2	3	4	5	6	P1	P2	P3	P4	P5	P6	P7	P8	P9	P10	P11	P12	P13	P14	
6450131-4	D		J	J	J	J	J	J	PM	PM	PM	PM	PM	PM	PM	PM	PM	PM	PM	PM	PM	PM	
	K		K	K	K	K	K																
	N		N	N	N	N	N	N															
	S		S	H	H	S	S																
24S + 14P		HD																					HD

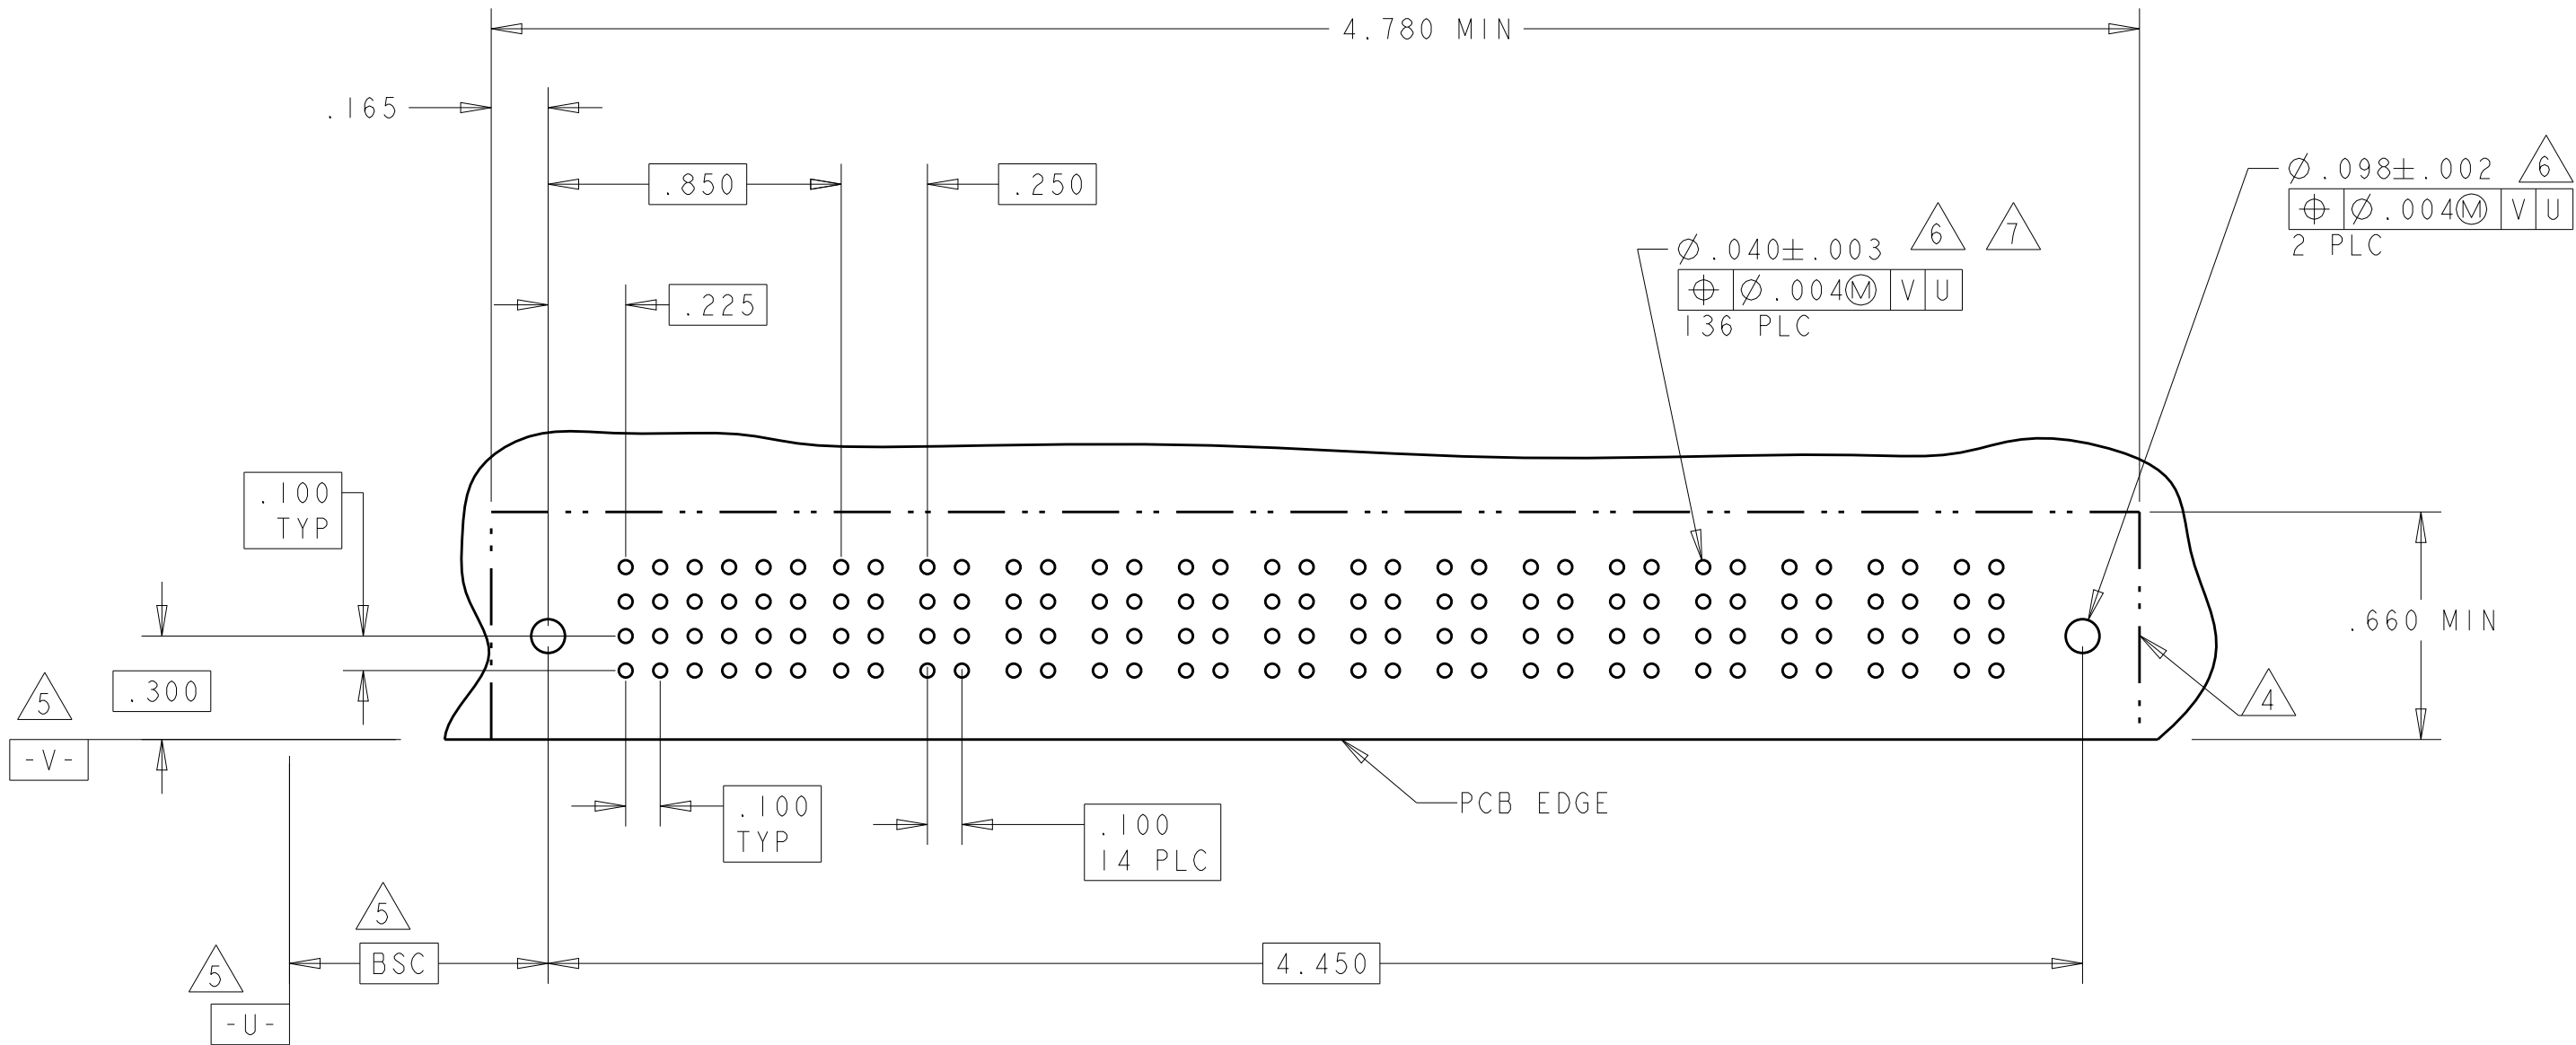

PA	.090
PM	.135
CODE	TAIL LENGTH
POWER CONTACT	

Z	STD	.090	D
Y	STD	.090	C
R	STD	.090	B
O	STD	.090	A
A4	MLBF	.090	D
A3	MLBF	.090	C
A2	MLBF	.090	B
A1	MLBF	.090	A
E	MLBF	.135	D
F	MLBF	.135	C
G	MLBF	.135	B
H	MLBF	.135	A
FJ	MFBF	.135	D
J	STD	.135	D
K	STD	.135	C
N	STD	.135	B
S	STD	.135	A
CODE	MATING SEQUENCE	TAIL LENGTH	ROW
SIGNAL CONTACT			

THIS DRAWING IS A CONTROLLED DOCUMENT.

OWN: R. GRZYBOWSKI
CHK: M. PERCHERKE
APVD: W. PERCHERKE

DIMENSIONS: INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±.01
1 PLC ±.01
2 PLC ±.01
3 PLC ±.005
4 PLC ±.002
ANGLES ±.2°
FINISH

MATERIAL

THIS DRAWING IS A CONTROLLED DOCUMENT.

OWN: R. GRZYBOWSKI
CHK: M. PERCHERKE
APVD: W. PERCHERKE

PRODUCT SPEC: 108-1973
APPLICATION SPEC: 114-13038
WEIGHT

CUSTOMER DRAWING

SCALE: 1:1


SHEET 3 OF 9


REV: E9




NAME: RIGHT ANGLE HEADER ASSY
SOLDER CONTACTS, W/GUIDES
MULTI-BEAM XL

SIZE: A1
CAGE CODE: 00779
DRAWING NO: 6450131


RESTRICTED TO: -

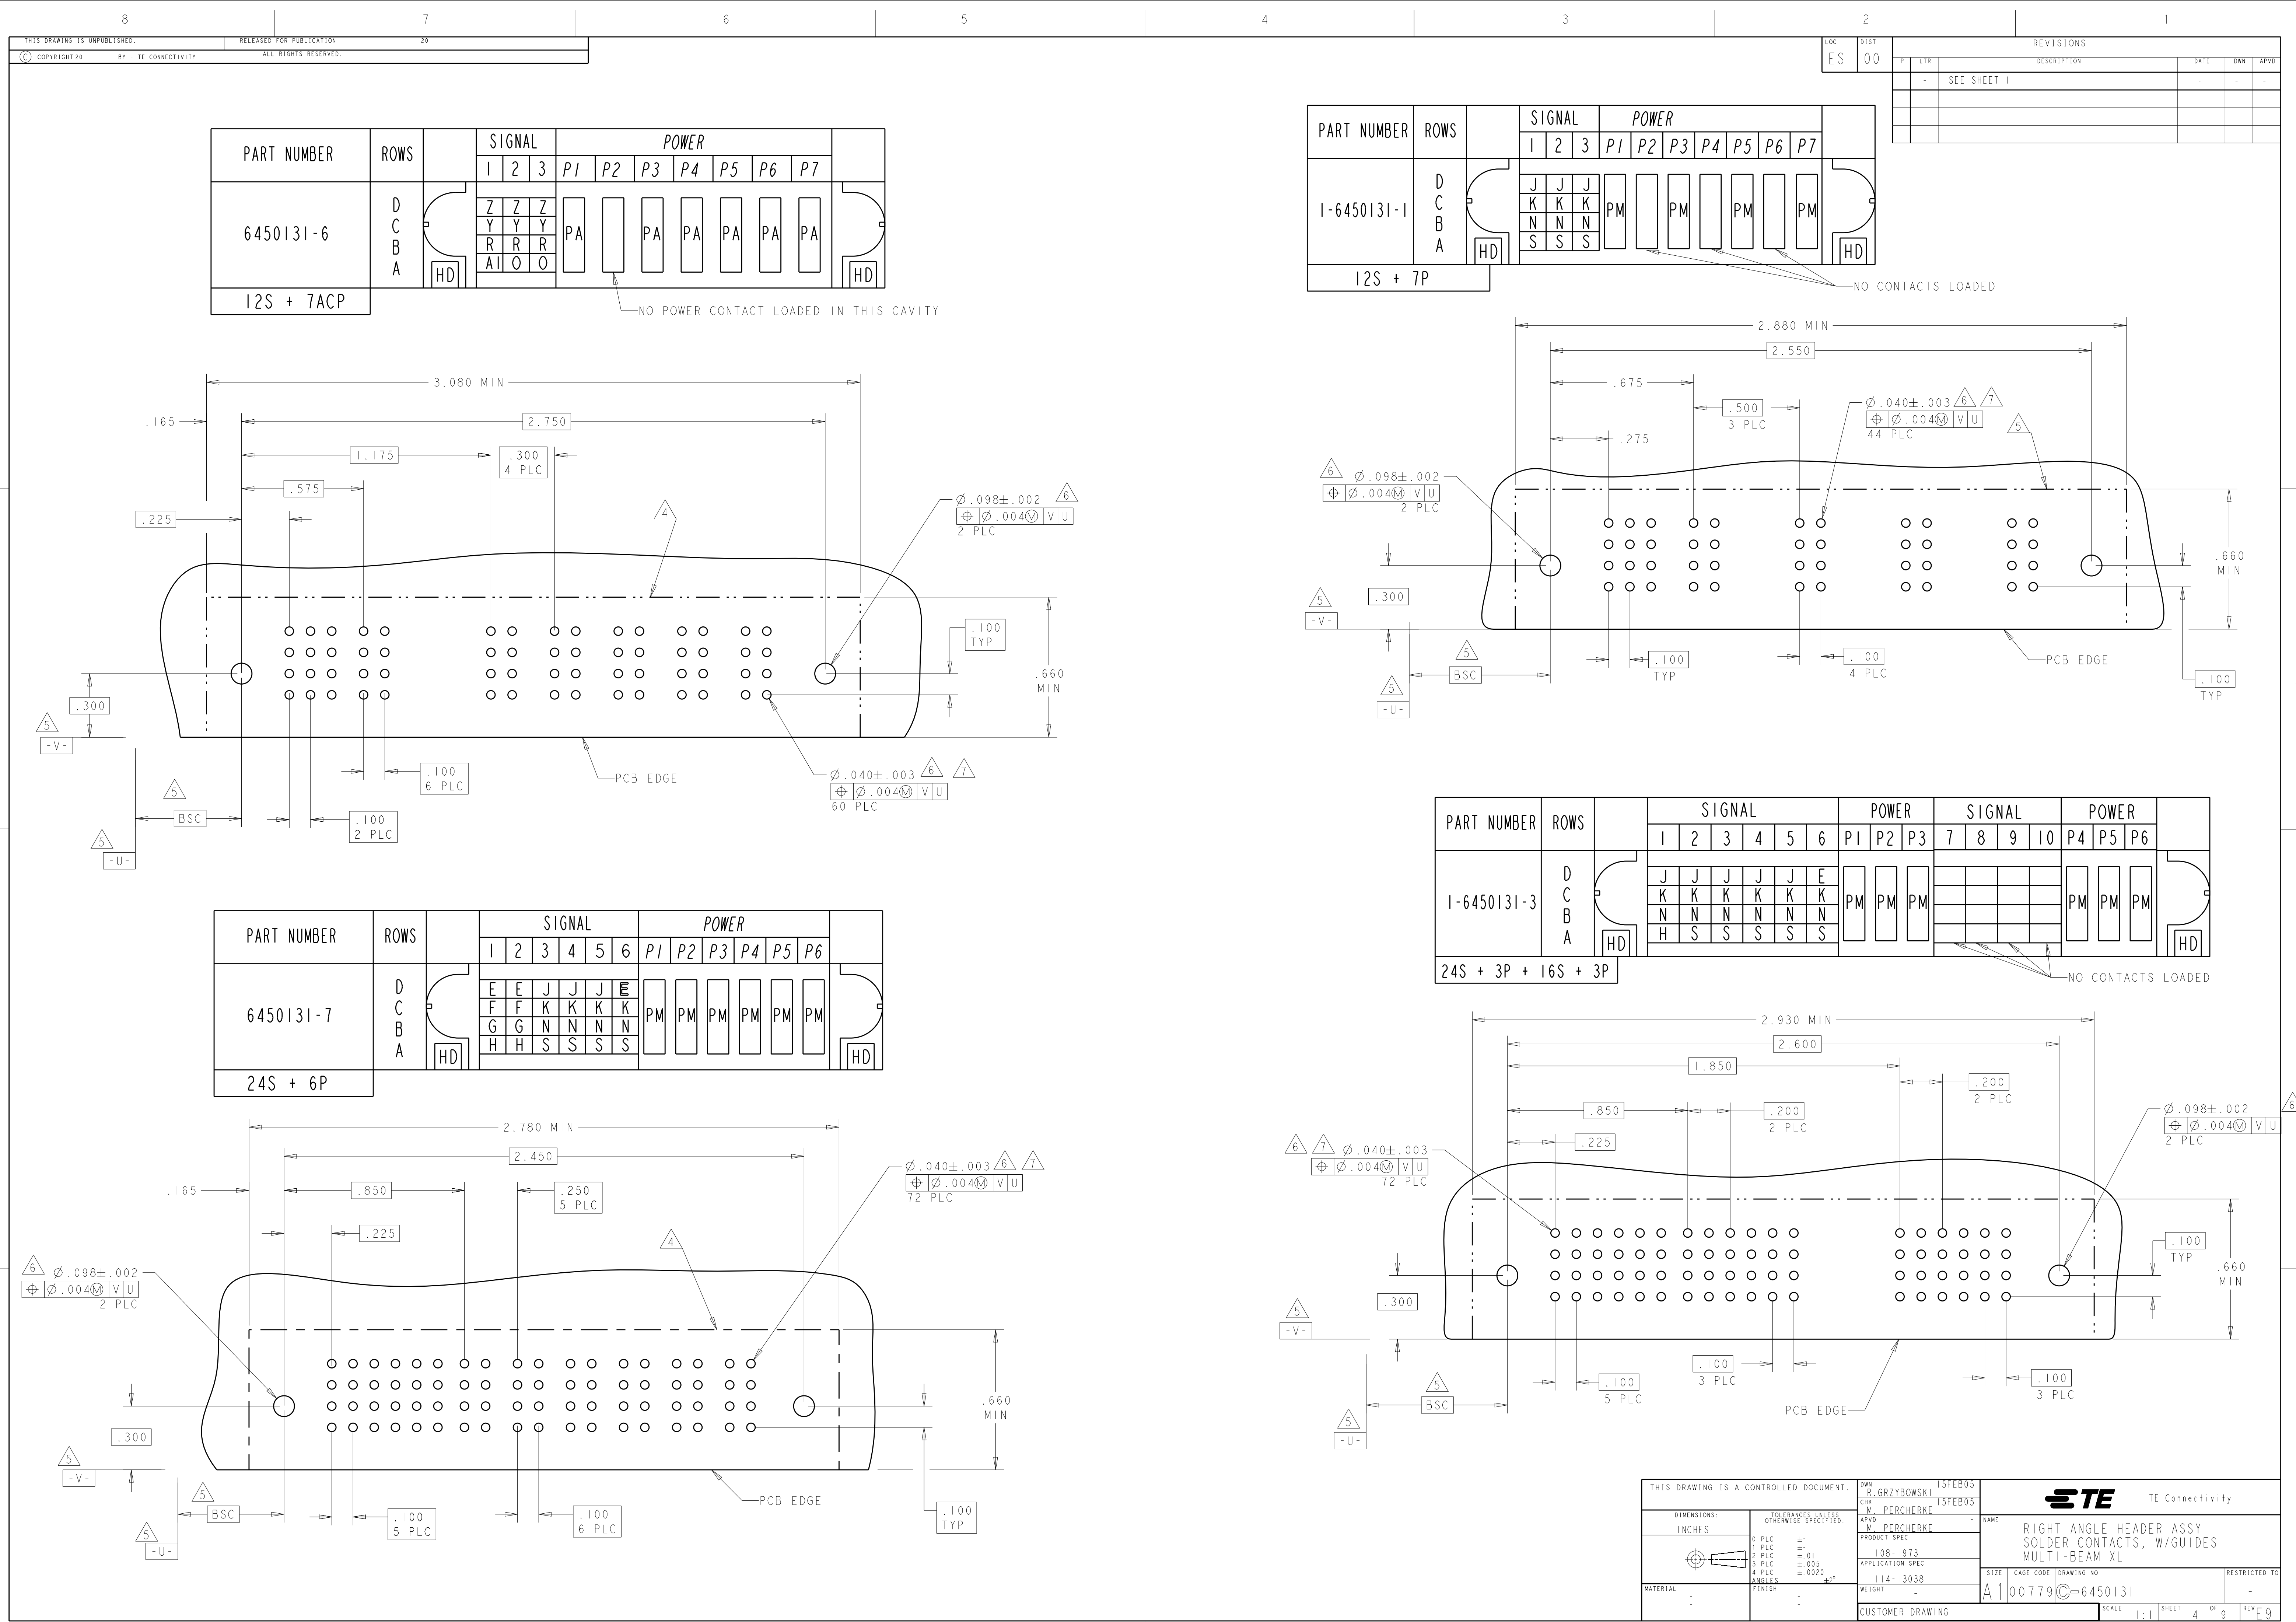


PART NUMBER	ROWS		SIGNAL					POWER								
			1	2	3	4	5	P1	P2	P3	P4	P5	P6	P7	P8	
1-6450131-5	D C B A		J	J	J	J	J									
			K	K	K	K	K									
			N	G	N	N	N									
			S	S	S	S	S									
20S + 8P																

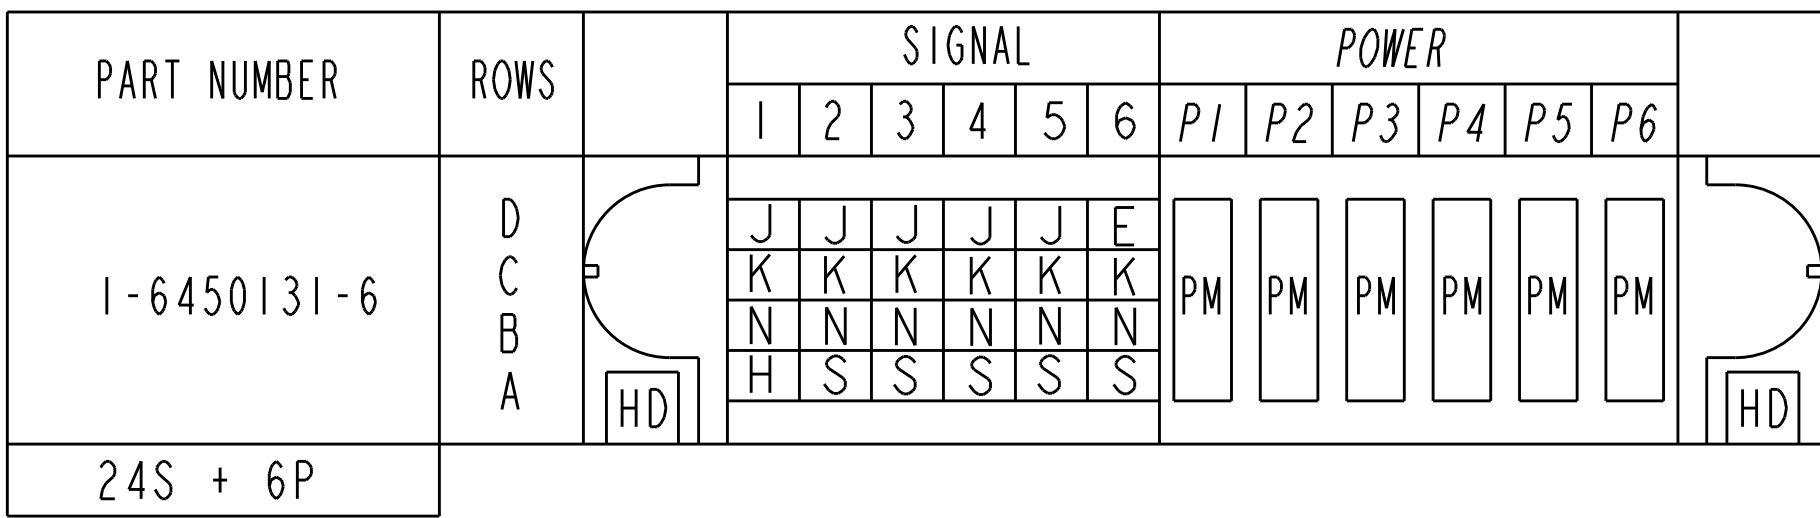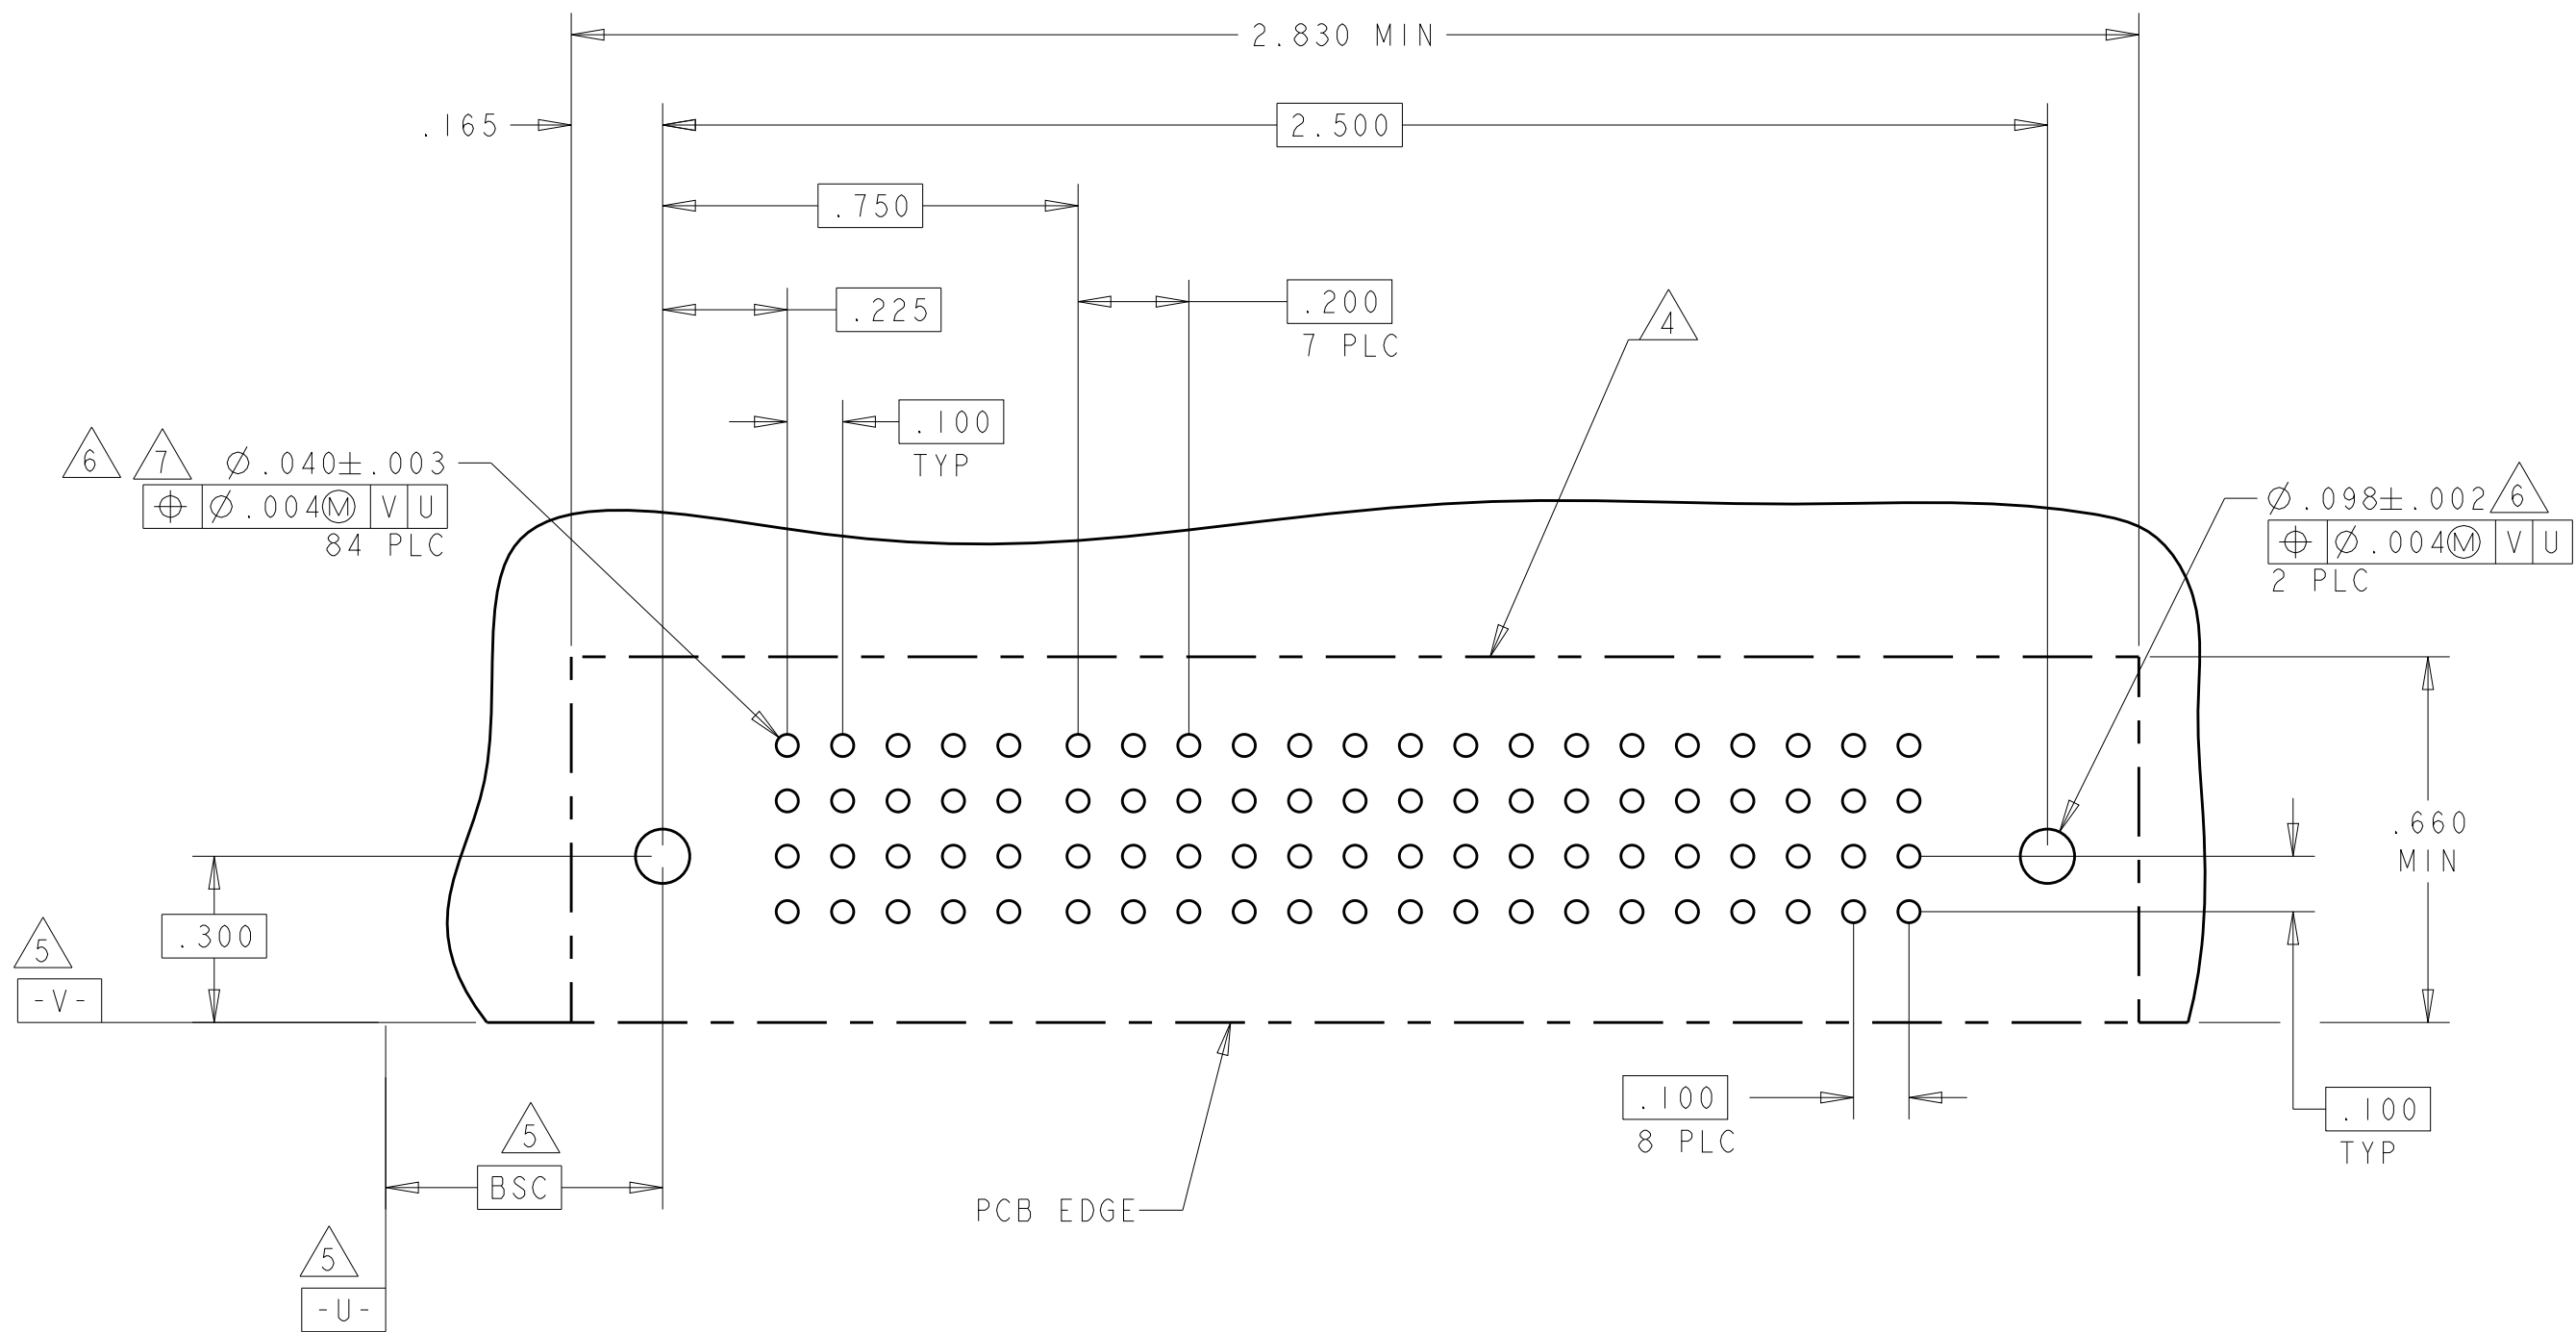




PART NUMBER	ROWS		SIGNAL			POWER				
			I	2	3	P1	P2	P3	P4	
1-6450131-9	D		J	FJ	FJ	PM	PM	PM	PM	
	C		K	K	K					
	B		N	N	N					
	A		HD	H	H					
12S + 4P										

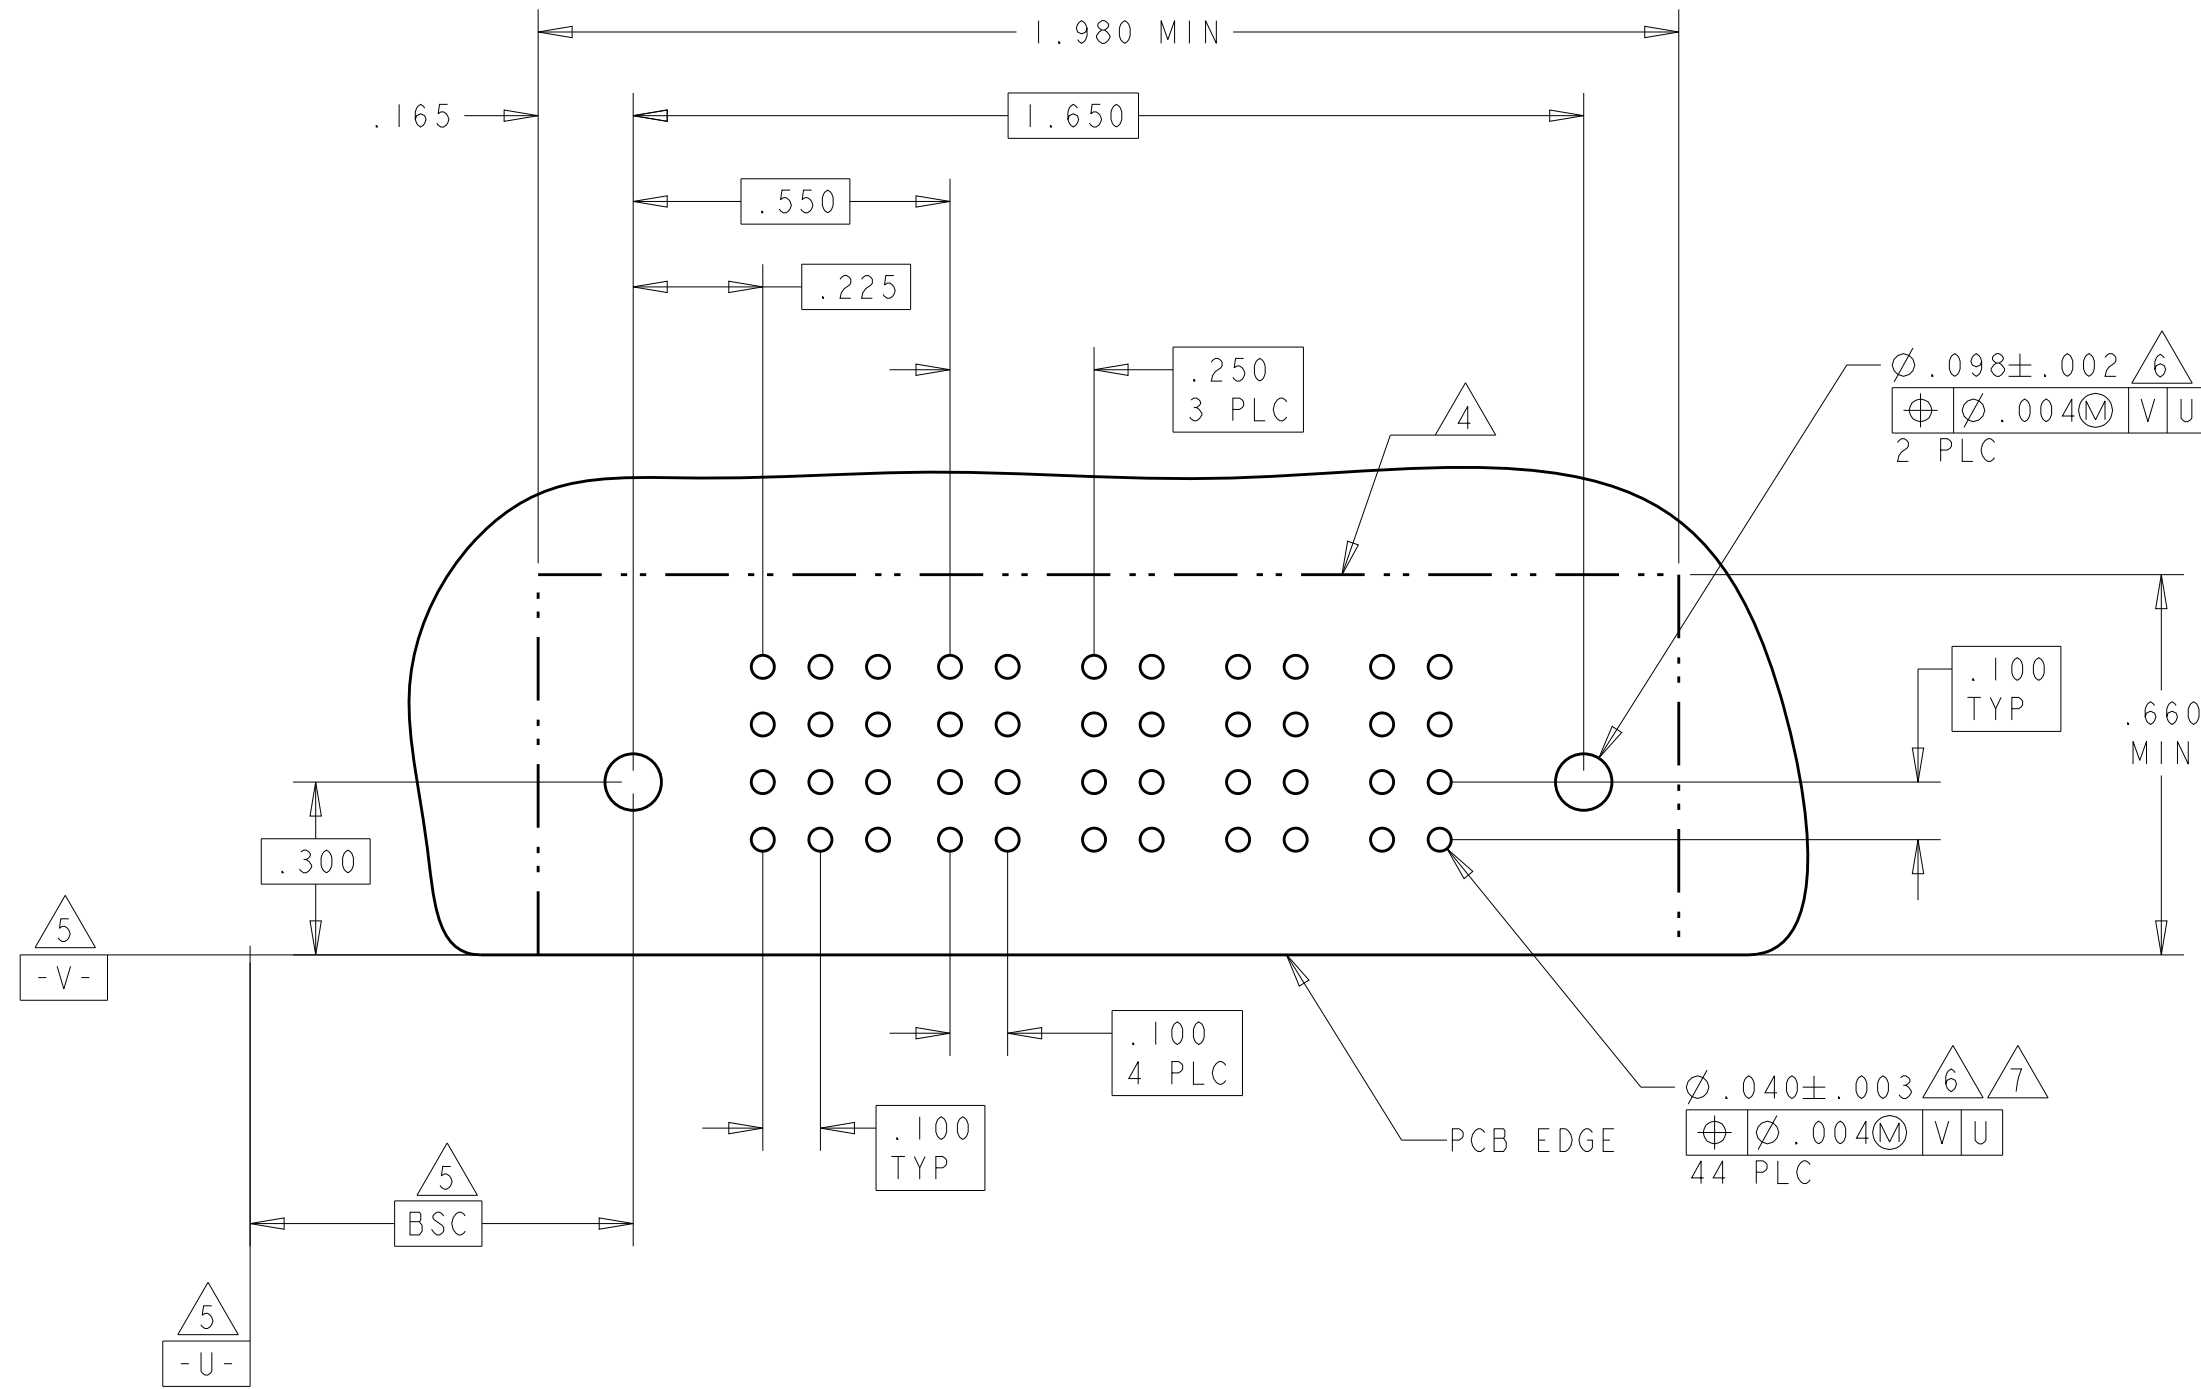4805 (3/11)

LOC		DIST		REVISIONS				
P	LTR	DESCRIPTION			DATE	DWN	APVD	
-	-	SEE SHEET 1			-	-	-	

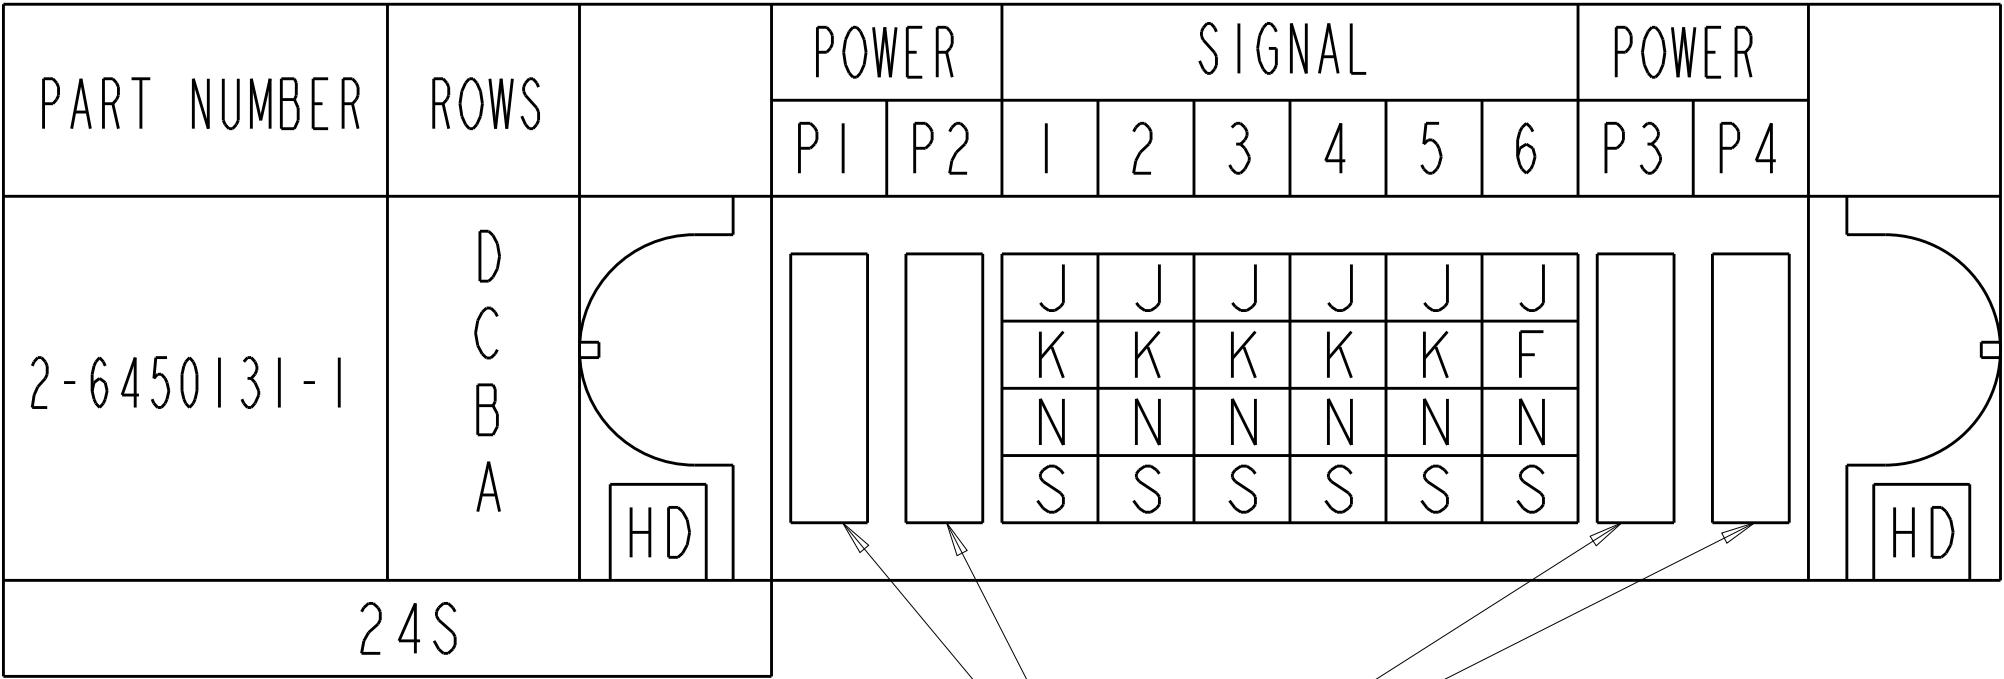

NO CONTACT LOADED

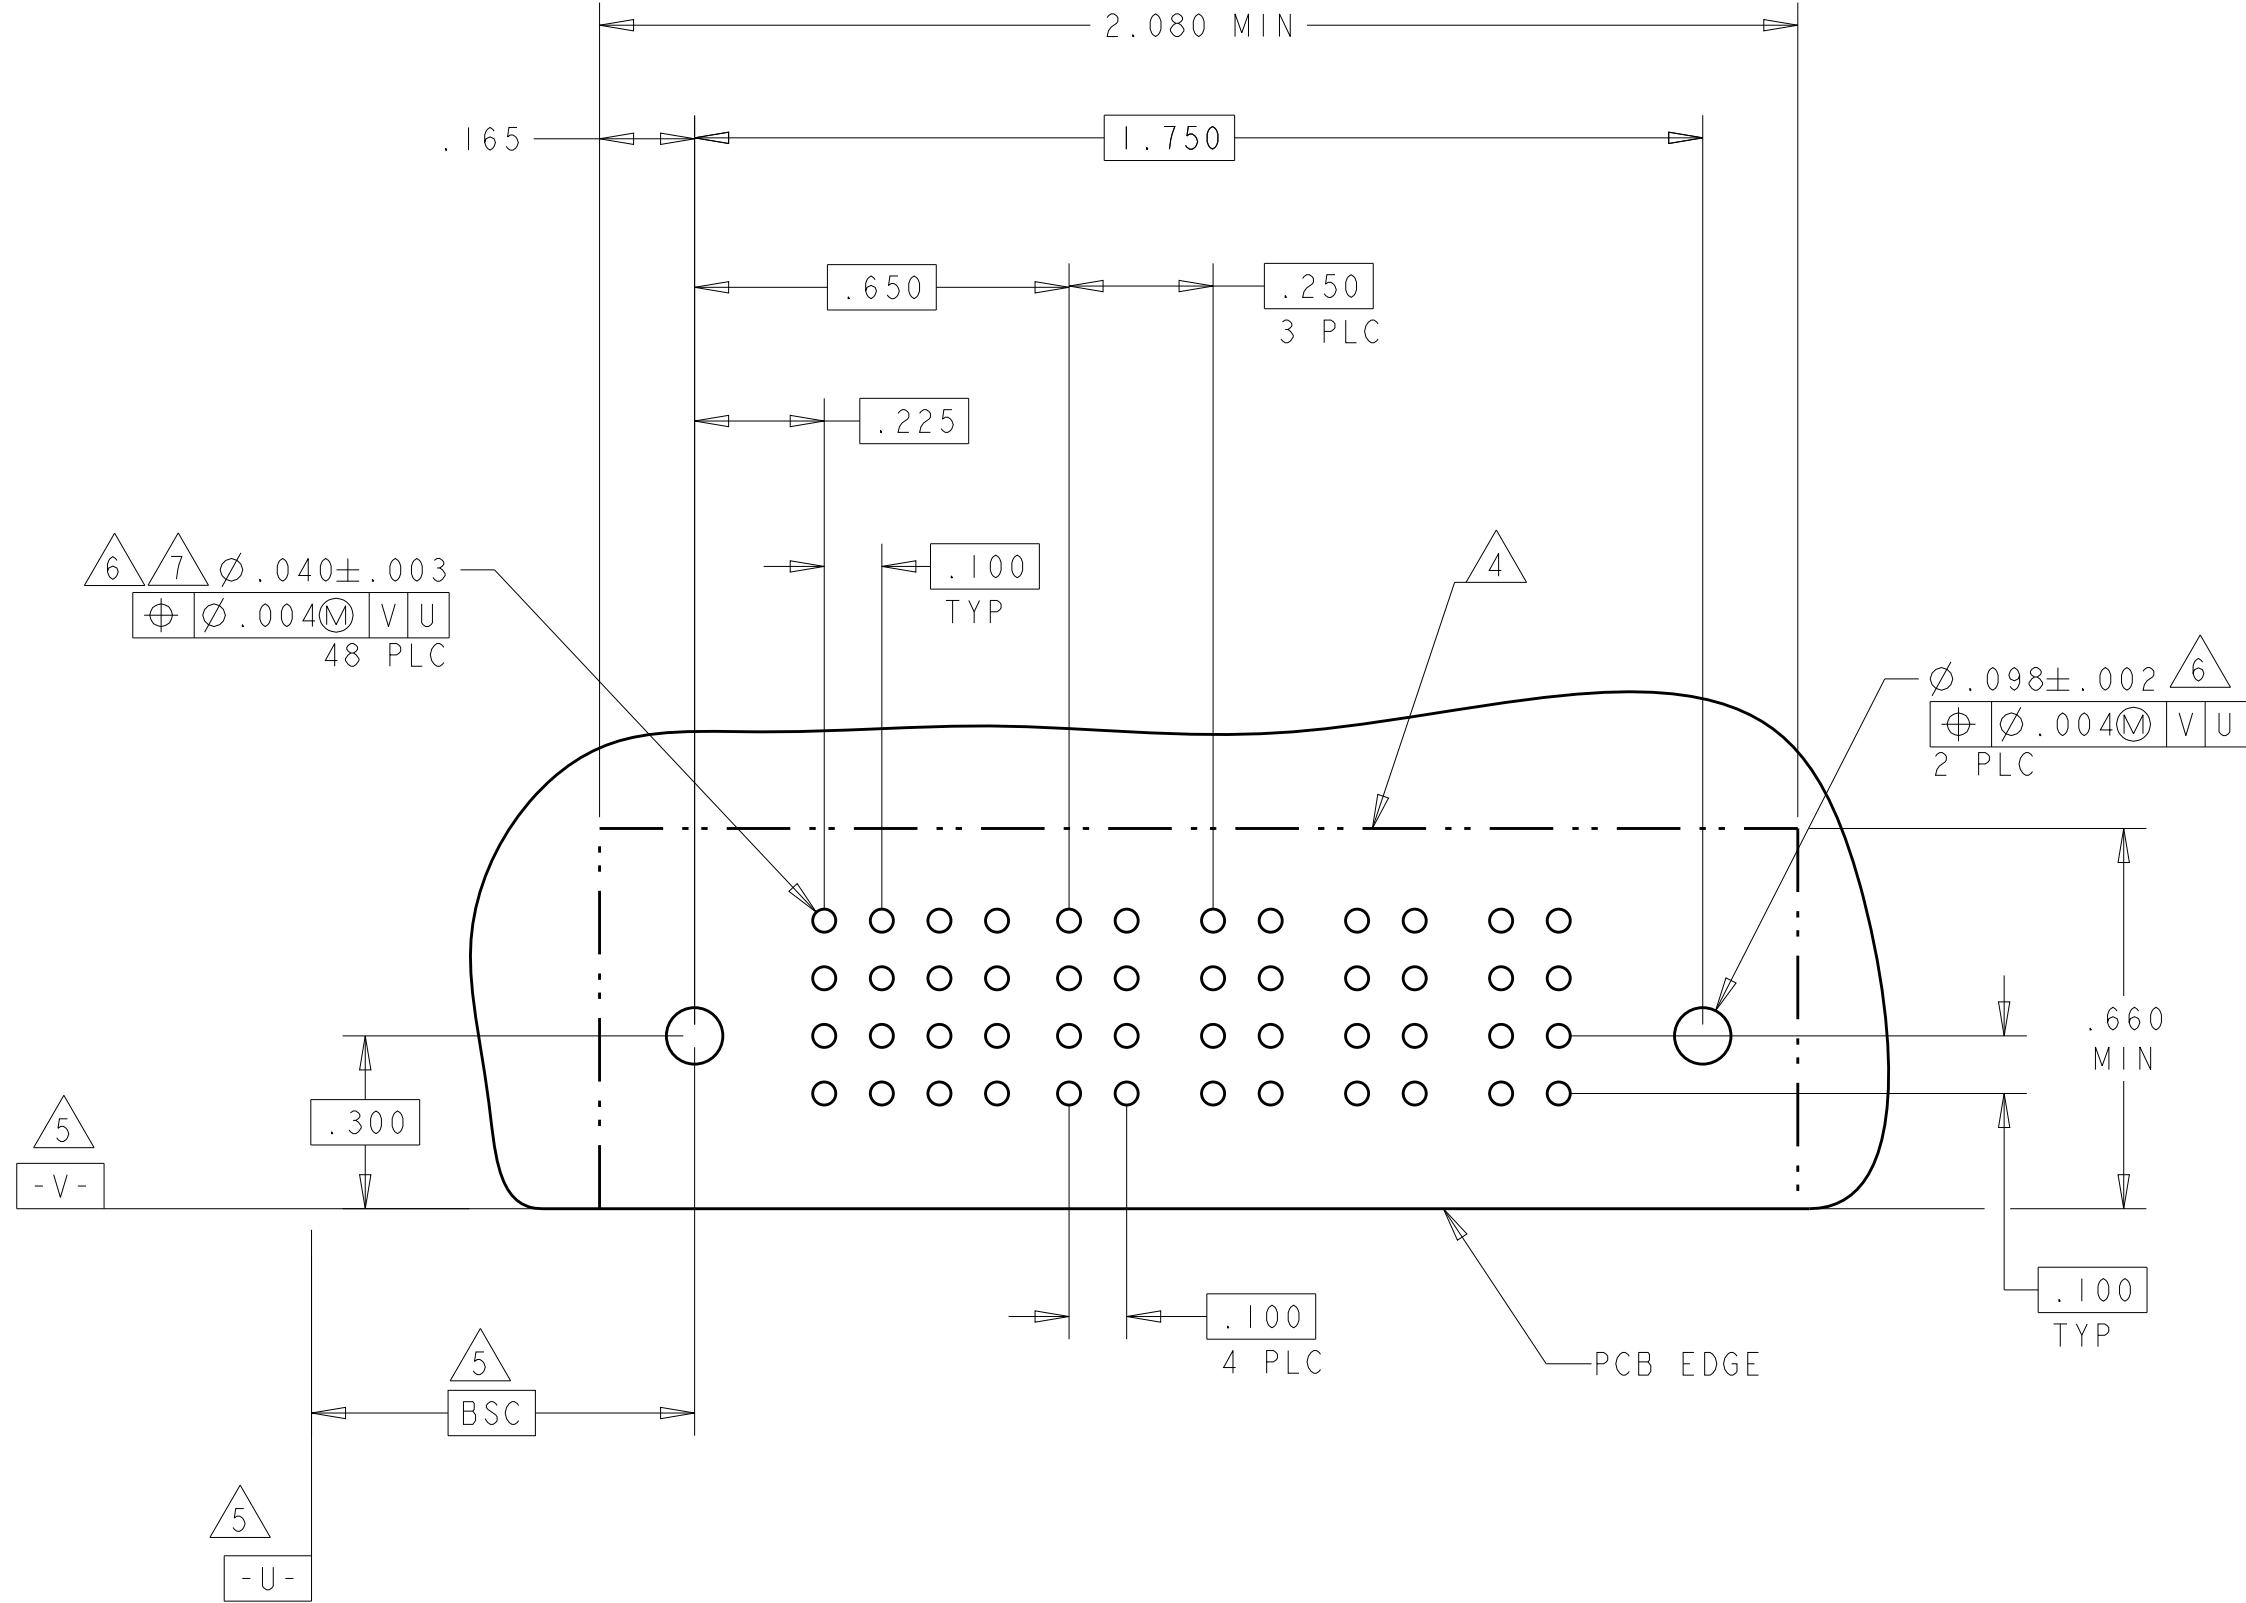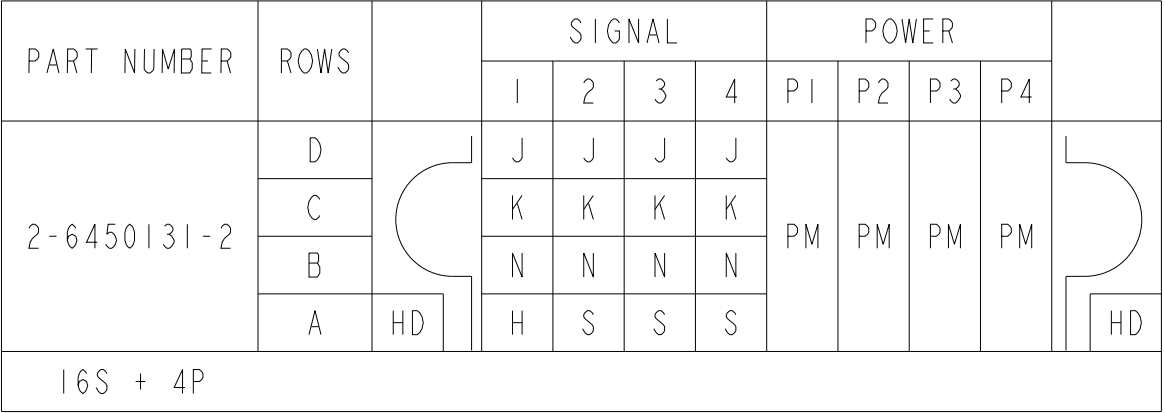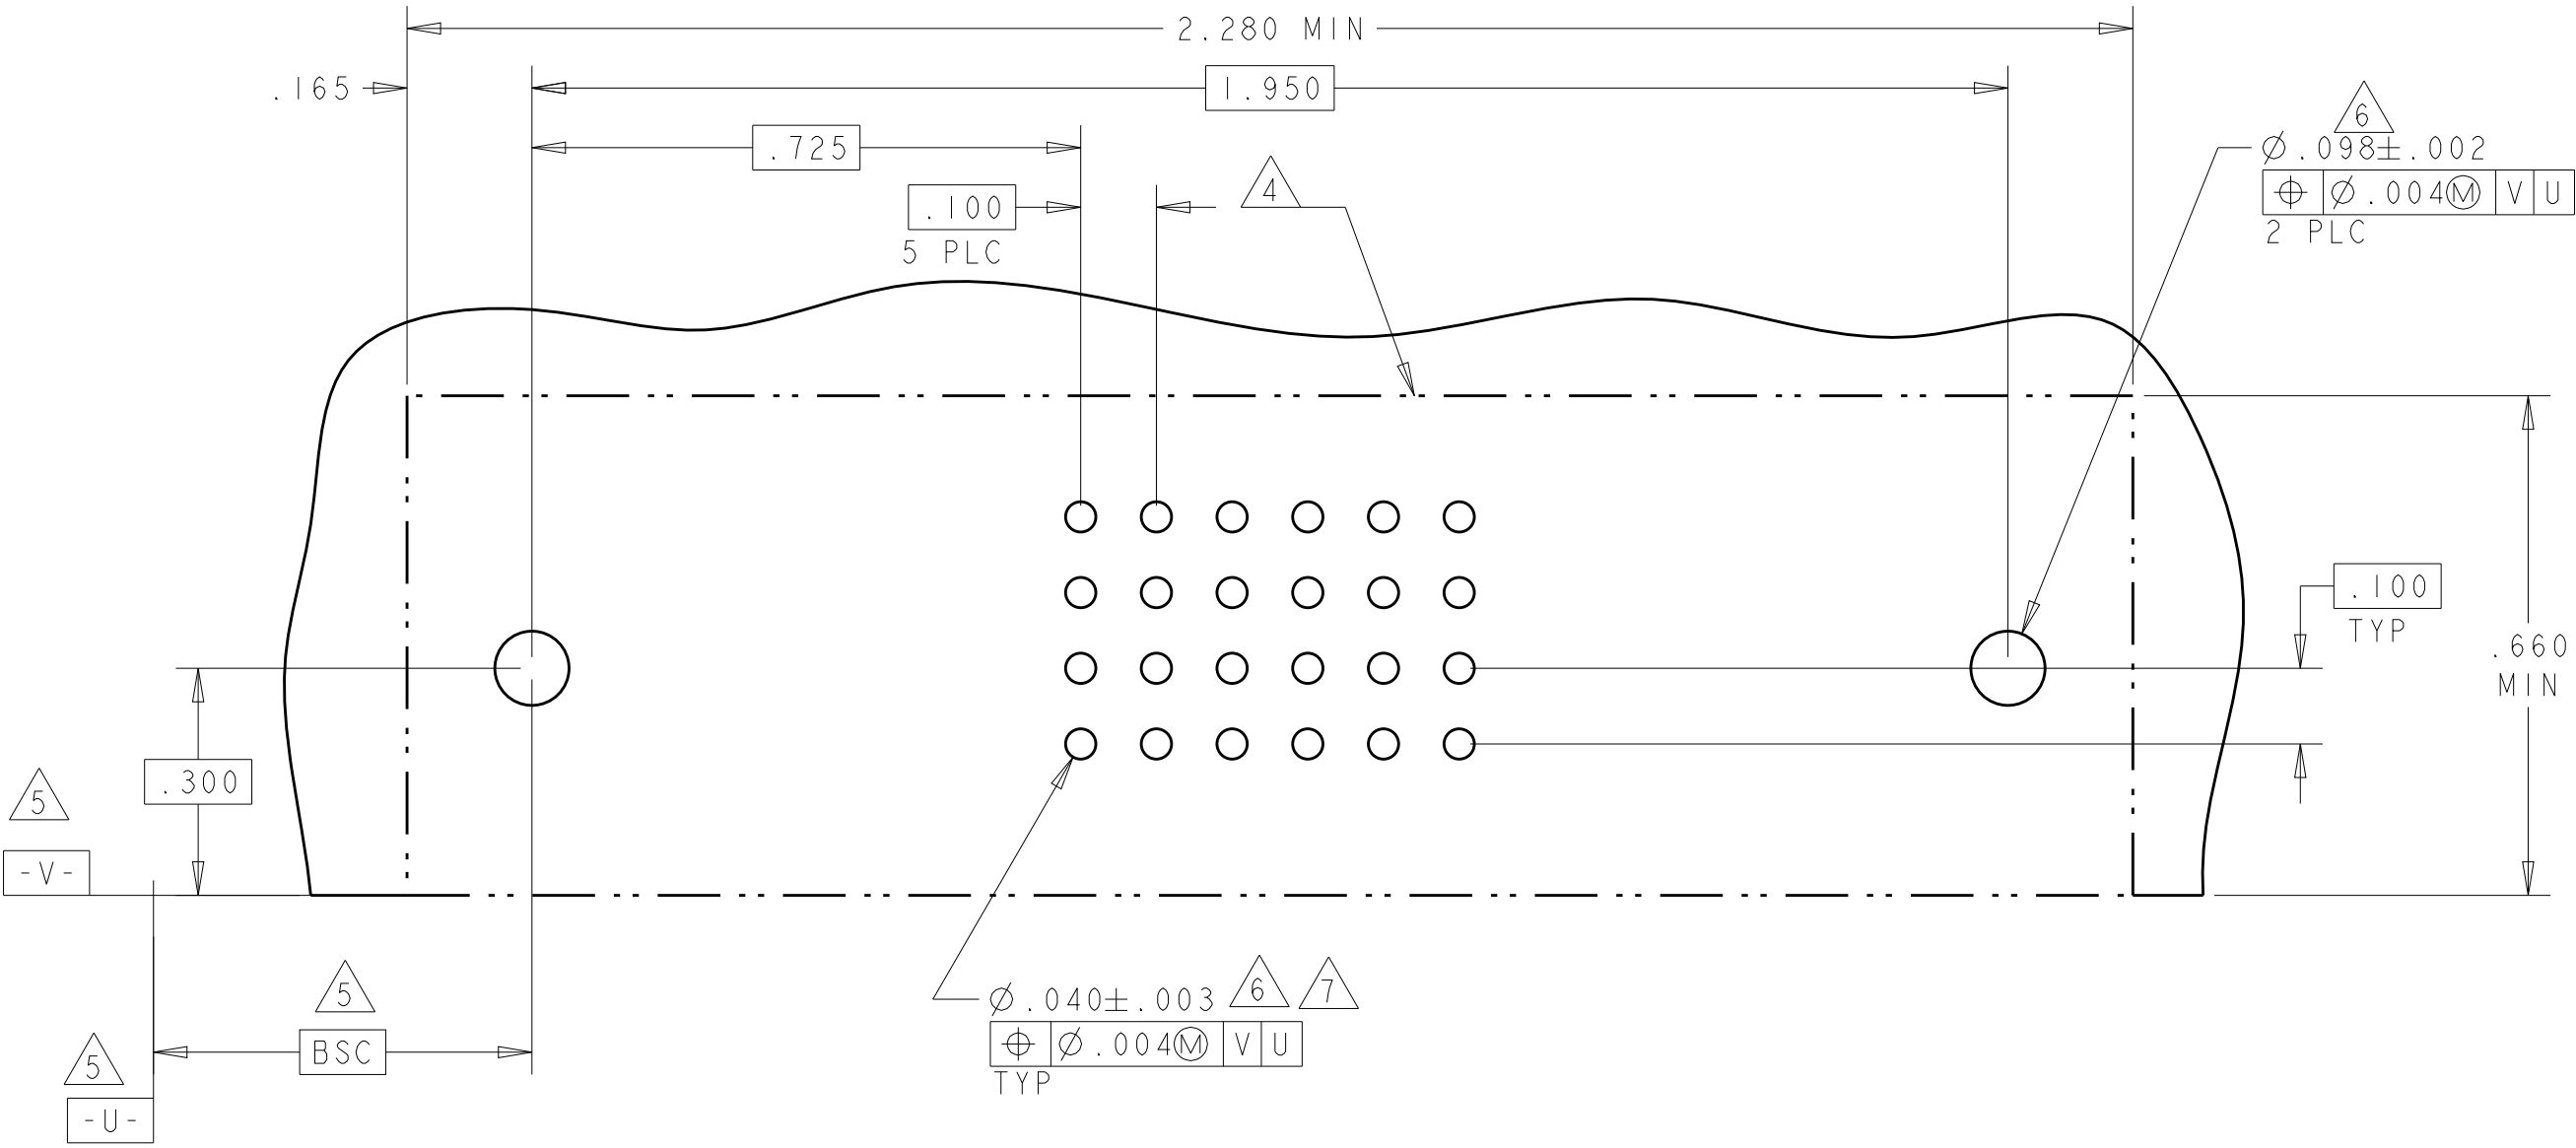

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN R. GRZYBOWSKI 15FEB05
CHK M. PERCHERKE 15FEB05
APVD M. PERCHERKE -

DIMENSIONS:
INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ±
1 PLC ±.01
2 PLC ±.01
3 PLC ±.005
4 PLC ±.0020
ANGLES ±2°
FINISH

MATERIAL

-

CUSTOMER DRAWING

SCALE 1:1

SHEET 8 OF 9

REV E9

TE Connectivity


RIGHT ANGLE HEADER ASSY
SOLDER CONTACTS, W/GUIDES
MULTI-BEAM XL

SIZE CAGE CODE DRAWING NO
A100779C=6450131

RESTRICTED TO

LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-	-	SEE SHEET 1	-	-	-

PART NUMBER	ROWS		SIGNAL													POWER												
			1	2	3	4	5	6	7	8	9	10	11	12	13	P1	P2	P3	P4	P5	P6	P7	P8	P9	P10	P11	P12	
2-6450131-3	D		J	J	J	J	J	J	J	J	J	J	J	J		PM	PM	PM	PM	PM	PM	PM	PM	PM	PM	PM	PM	
	C		K	K	K	K	K	F	F	K	K	K	K	K														
	B		N	N	N	N	N	G	G	N	N	N	N	N	N													
	A		S	S	S	S	S	S	S	S	S	S	S	S	S													
52S + 12P																												

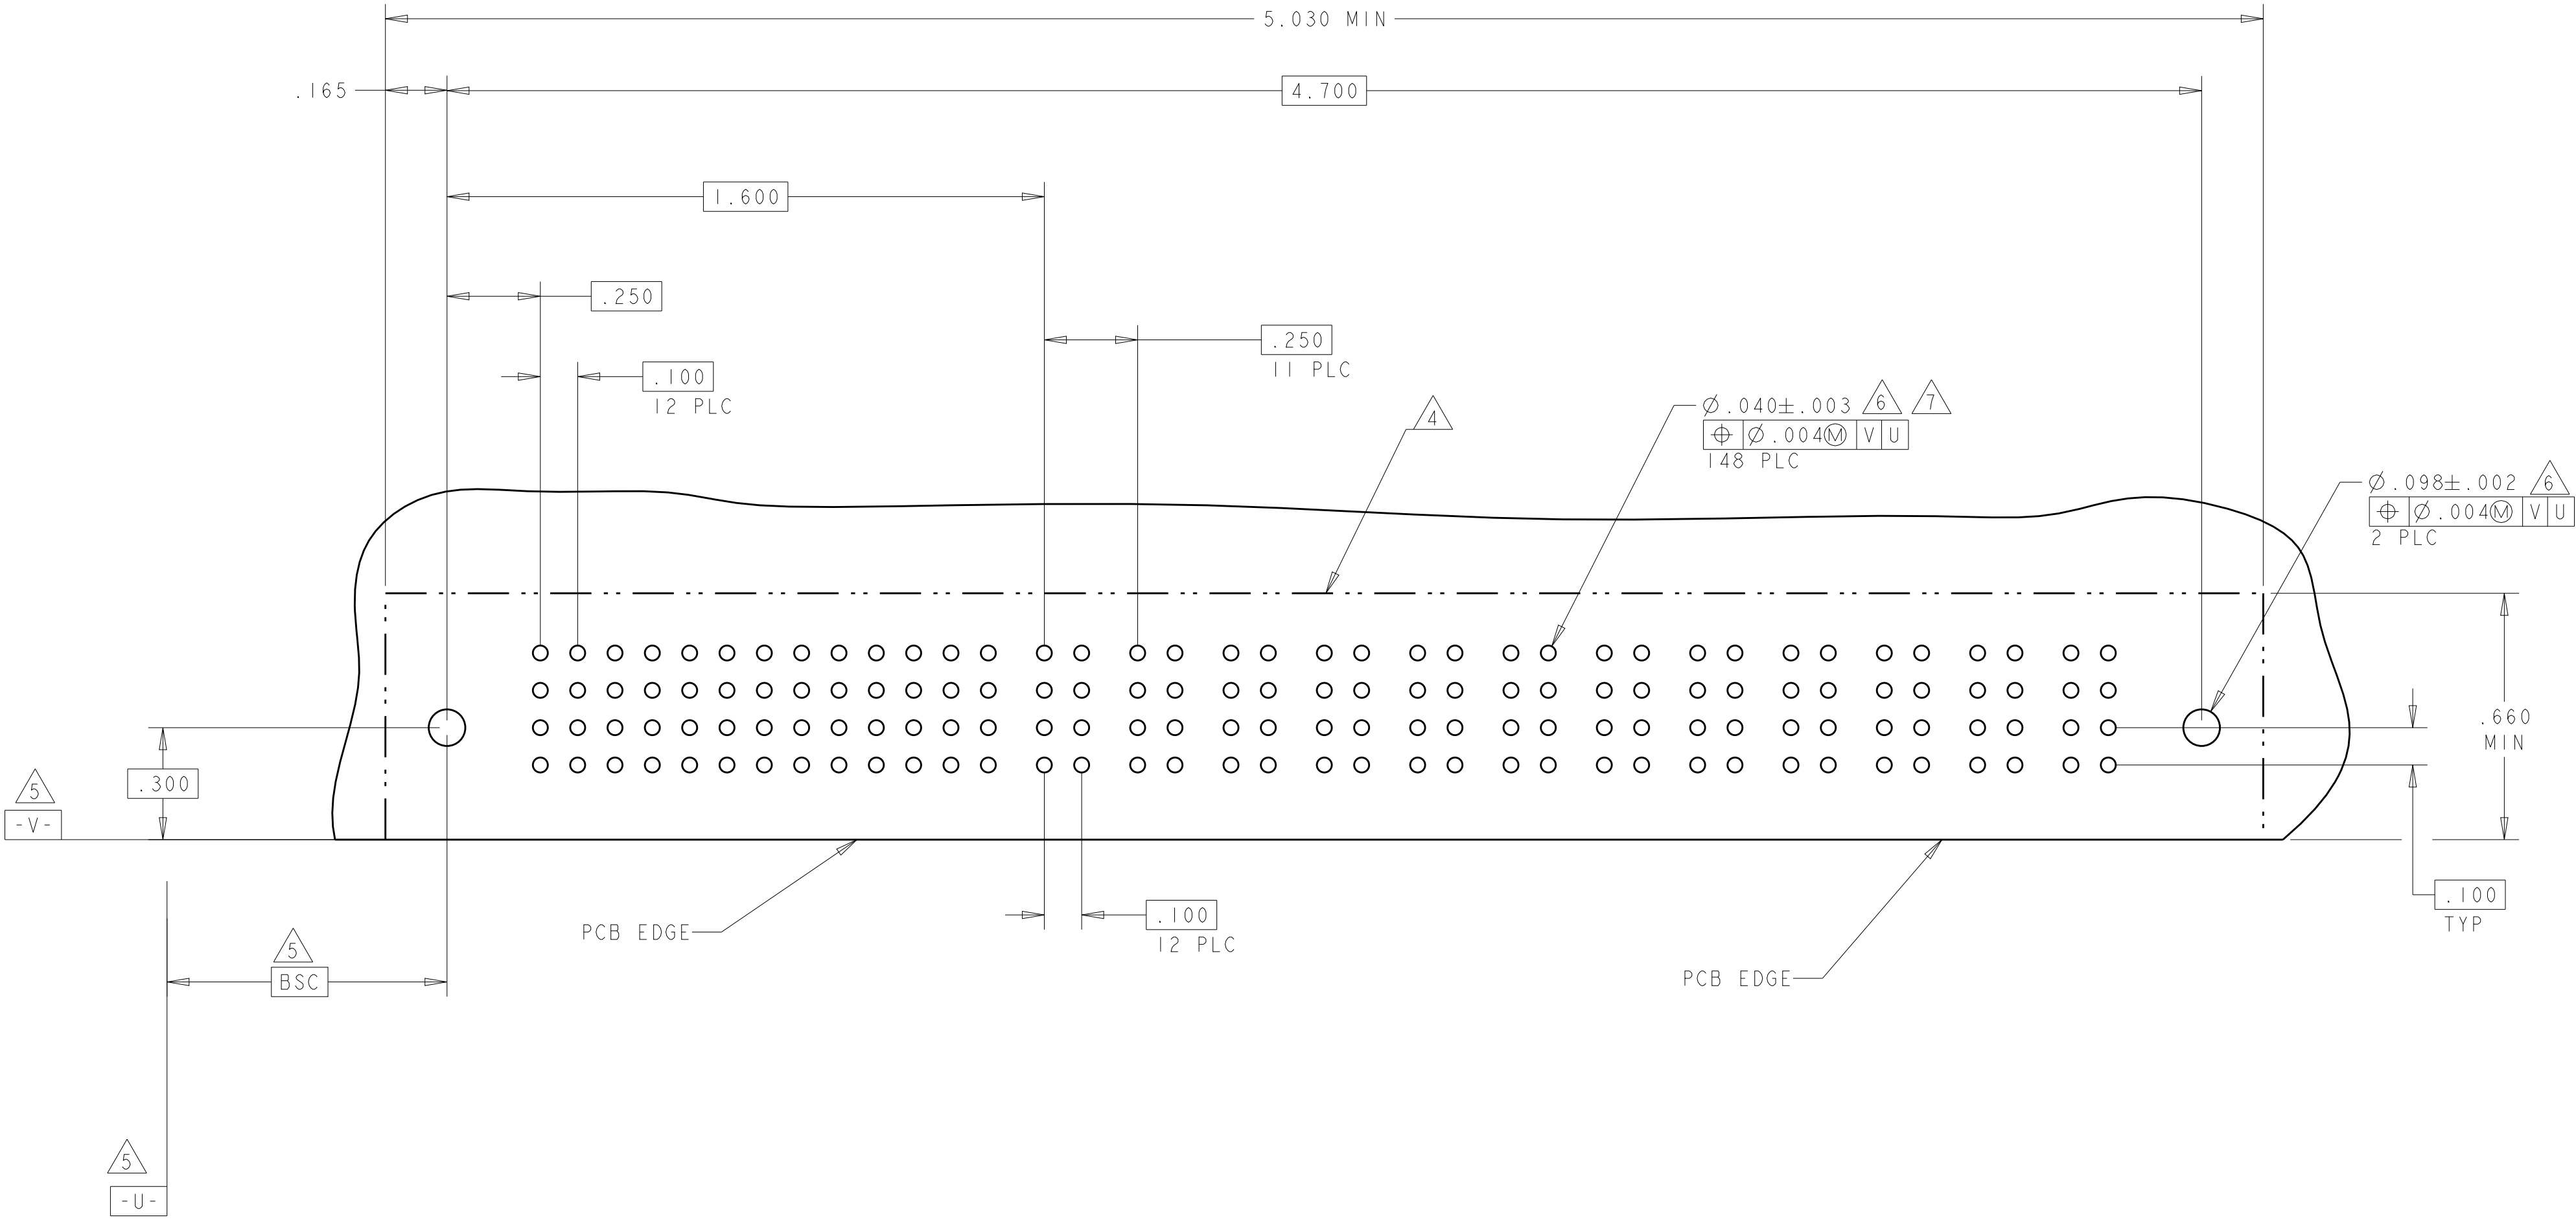

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN R. GRZYBOWSKI 15FEB05
CHK M. PERCHERKE 15FEB05
APVD M. PERCHERKE -

NAME

DIMENSIONS:
INCHES

0 PLC ±"
1 PLC ±.01
2 PLC ±.01
3 PLC ±.005
4 PLC ±.0020
ANGLES ±2°
FINISH

TOLERANCES UNLESS OTHERWISE SPECIFIED:

PRODUCT SPEC 108-1973
APPLICATION SPEC 114-13038
WEIGHT -

MATERIAL -

CUSTOMER DRAWING

SCALE 1:1

SHEET 9 OF 9

REV E 9

TE Connectivity

RIGHT ANGLE HEADER ASSY
SOLDER CONTACTS, W/GUIDES
MULTI-BEAM XL

SIZE A1
CAGE CODE 00779
DRAWING NO. 6450131

RESTRICTED TO -

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-6450131-7](#)