

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

© COPYRIGHT By --

ALL RIGHTS RESERVED.

LOC
J

DIST

REVISIONS

変更

P

LTR

DESCRIPTION

DATE

DWN

APVD

L2

ECR-15-018167

14JAN2016

I.T

W.H

REC HEDER HOUSING
リセ・ヘッダー・ハウジング
(PPS UL94V-0)
(COLOR:BLACK)REC CONTACT
リセ・コンタクト(ニッケル下地錫めっき仕上げ焼青銅)
POST TIN PL.
Ni UNDER PL. ALL OVER Phos-Broz
板厚: 0.3t
THK: 0.3t

SECT "A"-"A"

SECT "B"-"B"

HOUSING EXTERNAL FORM
ハウジング外形コネクタ
CONNECTOR
位置決め用穴
POSITIONER HOLE(NON ACCUMULATE) ±0.1
非累積公差±0.1
(PITCH)0.7
(最小)
(MIN)1.3
(最小)
(MIN)P.C.B MOUNTING LAYOUT
基板加工寸法適用基板厚 : 0.6mm
(APPLICABLE P.C.B THK : 0.6mm MIN)5 極以上10 極以下
5 Pos.AND MORE, 10 Pos.AND LESSボス形状 'B'
BOSS FORM 'B'ボス形状 'A'
BOSS FORM 'A'0.4
0.6

0.5

0.85


(PITCH)
1.25

B ±0.1

C

(0.5)

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
単位: 耗
mmTOLERANCES UNLESS
OTHERWISE SPECIFIED:
一般公差0 PLC ±
1 PLC ±
2 PLC ±
3 PLC ±
4 PLC ±
ANGLES ±10以下: ±0.2
10以上 30以下: ±0.25
30以上 100以下: ±0.3
角座: ±0.3MATERIAL
材料AS SHOWN
図中参照FINISH
仕上AS SHOWN
図中参照

DWN J.TANIGAWA 03JUL87

CHK S.KIKUCHI 03JUL87

APVD S.KUBOUCHI 24DEC98

PRODUCT SPEC

製品規格

APPLICATION SPEC

取付適用規格

WEIGHT

CUSTOMER DRAWING

STE

TE Connectivity

NAME 名称
1.25 F-P コネクタ (基板対基板接続用) 例仕様 リセ ヘッダー アッセンブリ
基板垂直取付型 (H) サーフェスマウント タイプ 基板位置決め用ボス付
1.25 F-P CONNECTOR (B-TO-B) SINGLE ROW REC
HDR ASS'Y (H) SMT TYPE WITH BOSS

SIZE

CAGE CODE

DRAWING NO

番号

RESTRICTED TO

A300779

C-174638

SCALE
尺度 10:1SHEET
1 OF 1REV
L2注記
NOTES1 嵌合相手製品型番及び、嵌合時寸法は
MATING COUNTER PART NUMBER AND DIMENSIONS
表-1 参照のこと。
AFTER MATING: SEE TABLE 1.嵌合時寸法: 巾(mm) x 高さ(mm)
DIMENSIONS AFTER MATING: WIDE(mm) x HEIGHT(mm)

MATING COUNTER CONN 嵌合相手側コネクタ POST HDR ASSY			REC HDR ASSY SMT H TYPE WITH BOSS X-174638-X	
製品 型 番	P/N	高さ H		
DIP TYPE	X-174642-X	3.95	3.0 (巾 W) x	5.8 (高さ H)
		5.95	3.0 (巾 W) x	7.8 (高さ H)
SMT TYPE	ボス無 WITHOUT BOSS X-174644-X	3.95	4.4 (巾 W) x	5.8 (高さ H)
	ボス付 WITH BOSS X-174820-X	5.95	4.4 (巾 W) x	7.8 (高さ H)

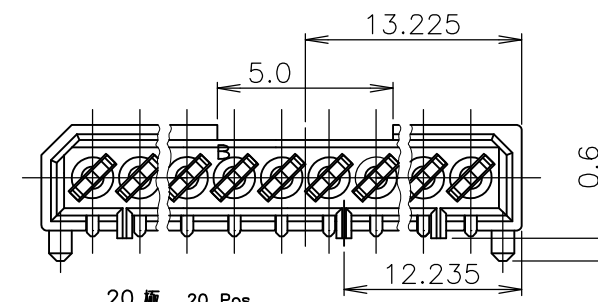

TABLE 1 SMT TYPEは、巾及び高さ寸法に
SMT TYPE INCLUDE DIMENSIONS
半田付タイソ部寸法を含みます。
OF SOLDER DIP TIME.

2

基板位置決め用ボス切断跡。
CUT MARK OF POSITIONER BOSS.

3

OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

20 極 20 Pos.
(SCALE 5-1)

L2

OBSOLETE

OBSOLETE

L1

REACTIVE

OBSOLETE

OBSOLETE

L1

REACTIVE

OBSOLETE

ACTIVE

ボス形状
BOSS FORM

C

B

A

極数
Pos.型 番
P/N

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[3-174638-8](#)