



MATERIAL	FLAMMABILITY RATING	CONTINUOUS OPERATING TEMP.
ABS	UL94-HB	-40°C ~ +60°C / -40°F ~ 140°F
CLEAR PC	UL94-V0 UV STABILIZED	-40°C ~ +130°C / -40°F ~ 266°F
ABS / PC BLEND	UL94-5VA	-40°C ~ +85°C / -40°F ~ 185°F
PBT / PC BLEND	UL94-5VA + UV (f1)	-40°C ~ +75°C / -40°F ~ 167°F


FINISH:
BODY _____ LIGHT GRAY
COVER _____ LIGHT GRAY OR CLEAR
LATCHES & HINGES _____ PLASTIC
WALL MOUNTING BRACKETS__ STAINLESS STEEL & HARDWARE

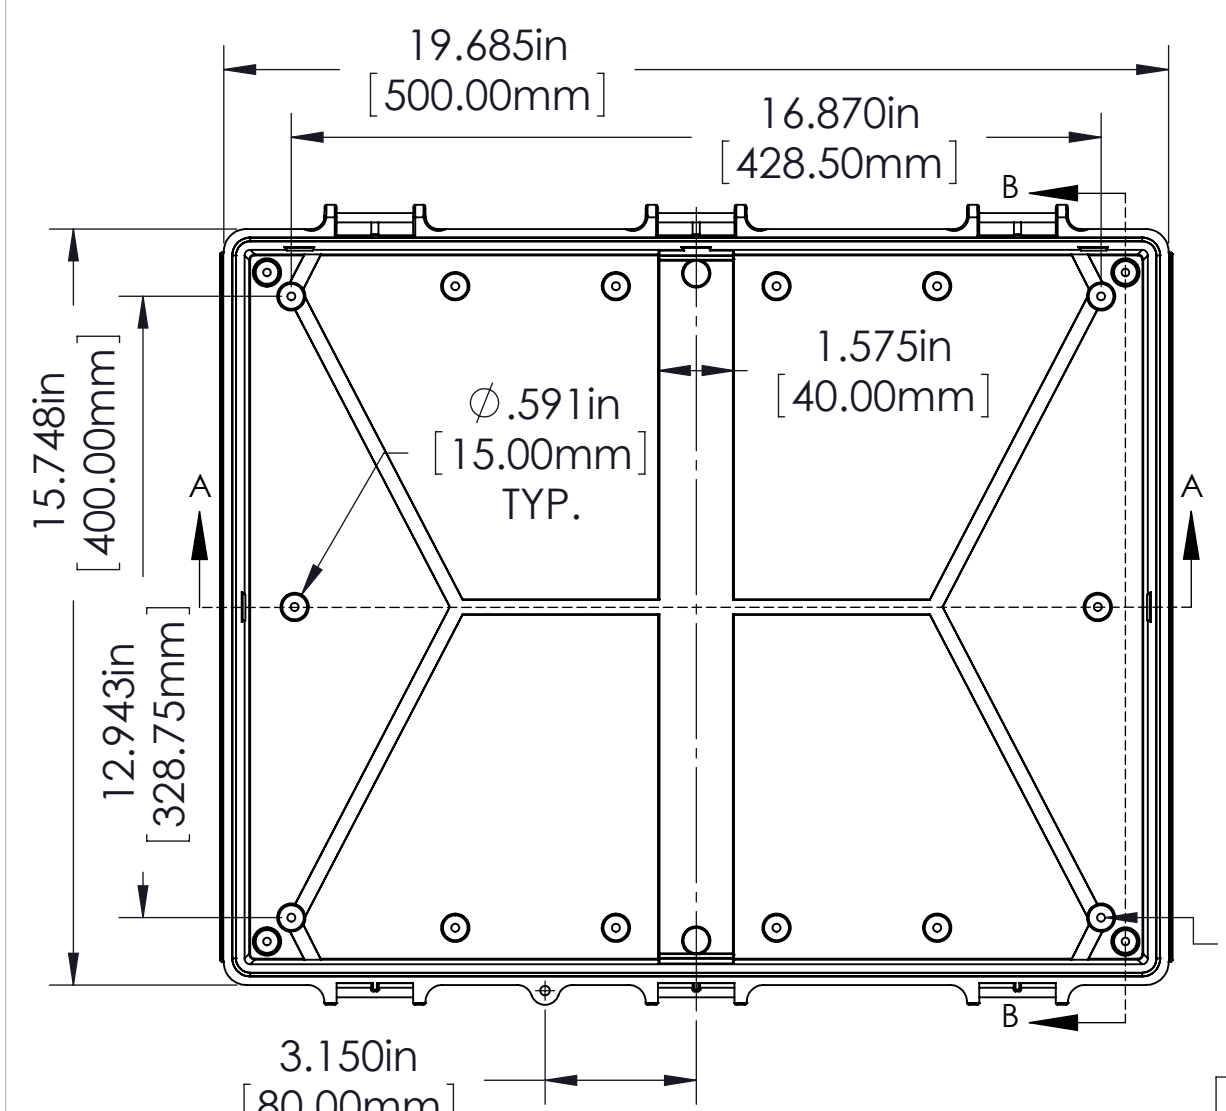


BODY

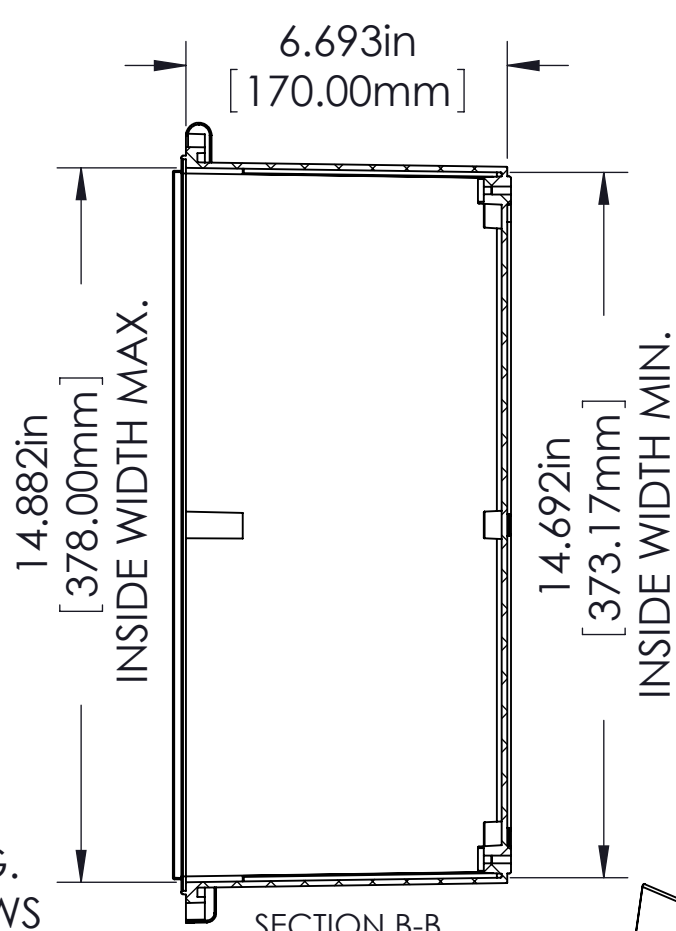

Ø.165in [4.20mm]
FOR M5 x 10mm LG. SELF-TAPPING SCREWS (ABS VERSIONS ONLY)
M5 THREADED INSERTS ON ALL OTHER VERSIONS
USE M5 x 8mm LG. MACHINE SCREWS.

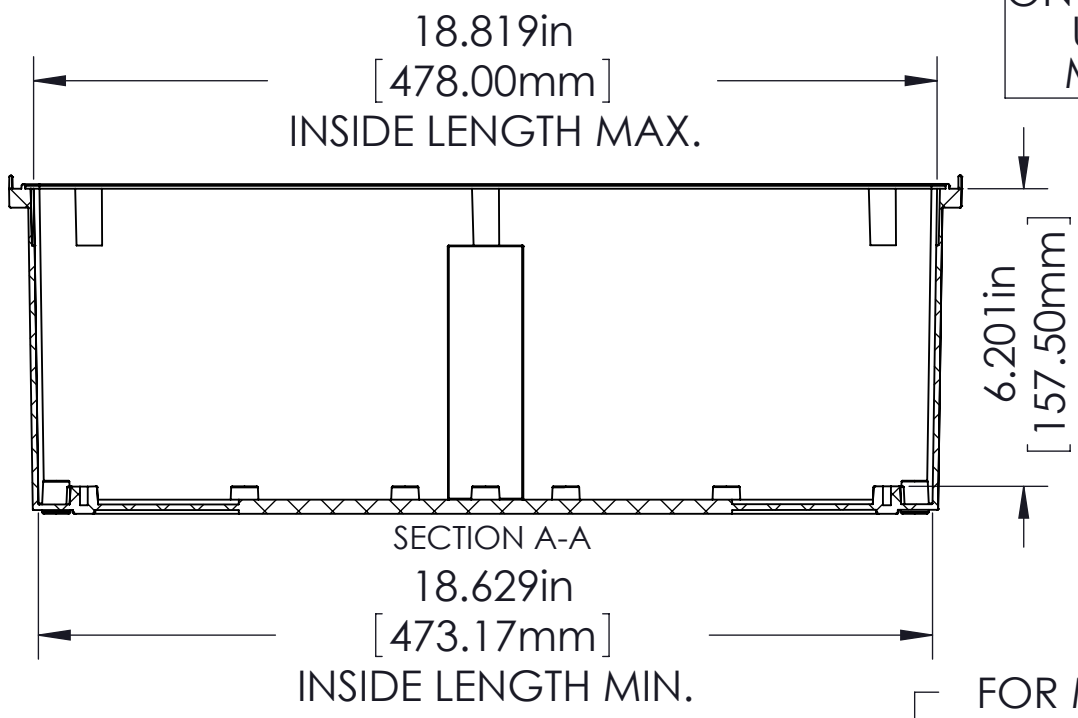


SECTION A-A

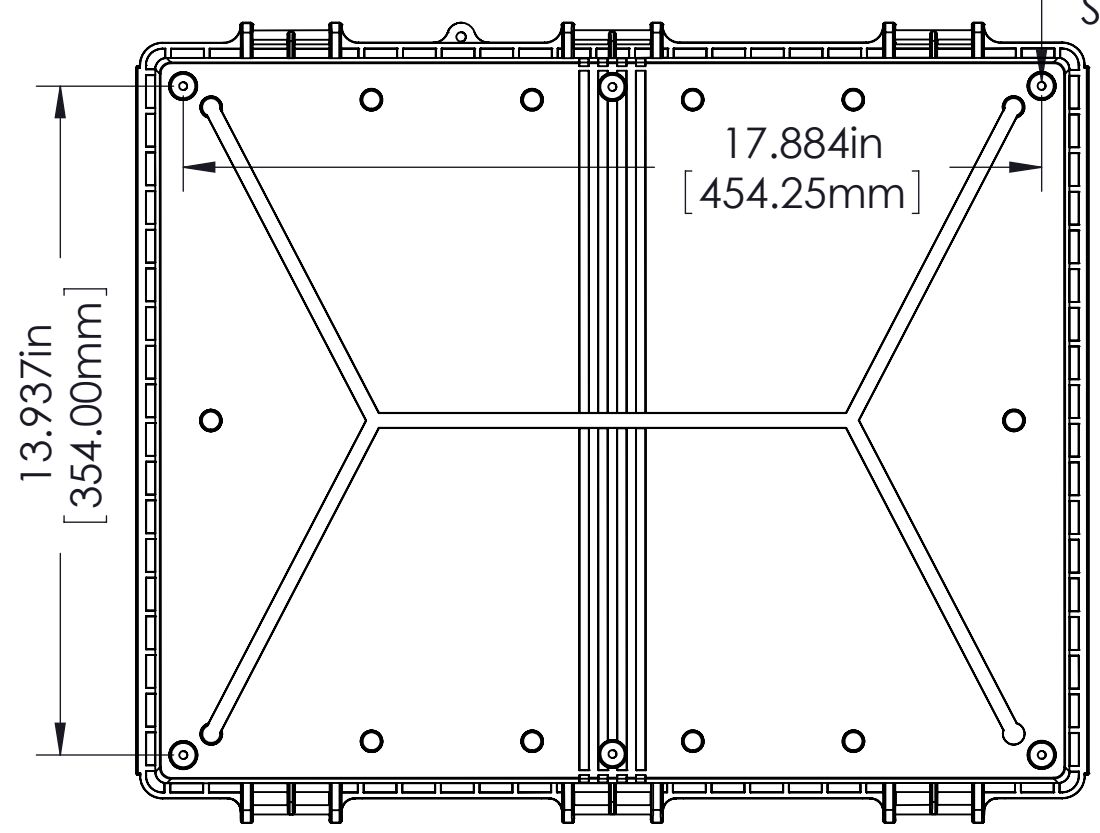



Ø.165in [4.20mm]
FOR M5 x 10mm LG. SELF-TAPPING SCREWS 4 PLCS.

COVER

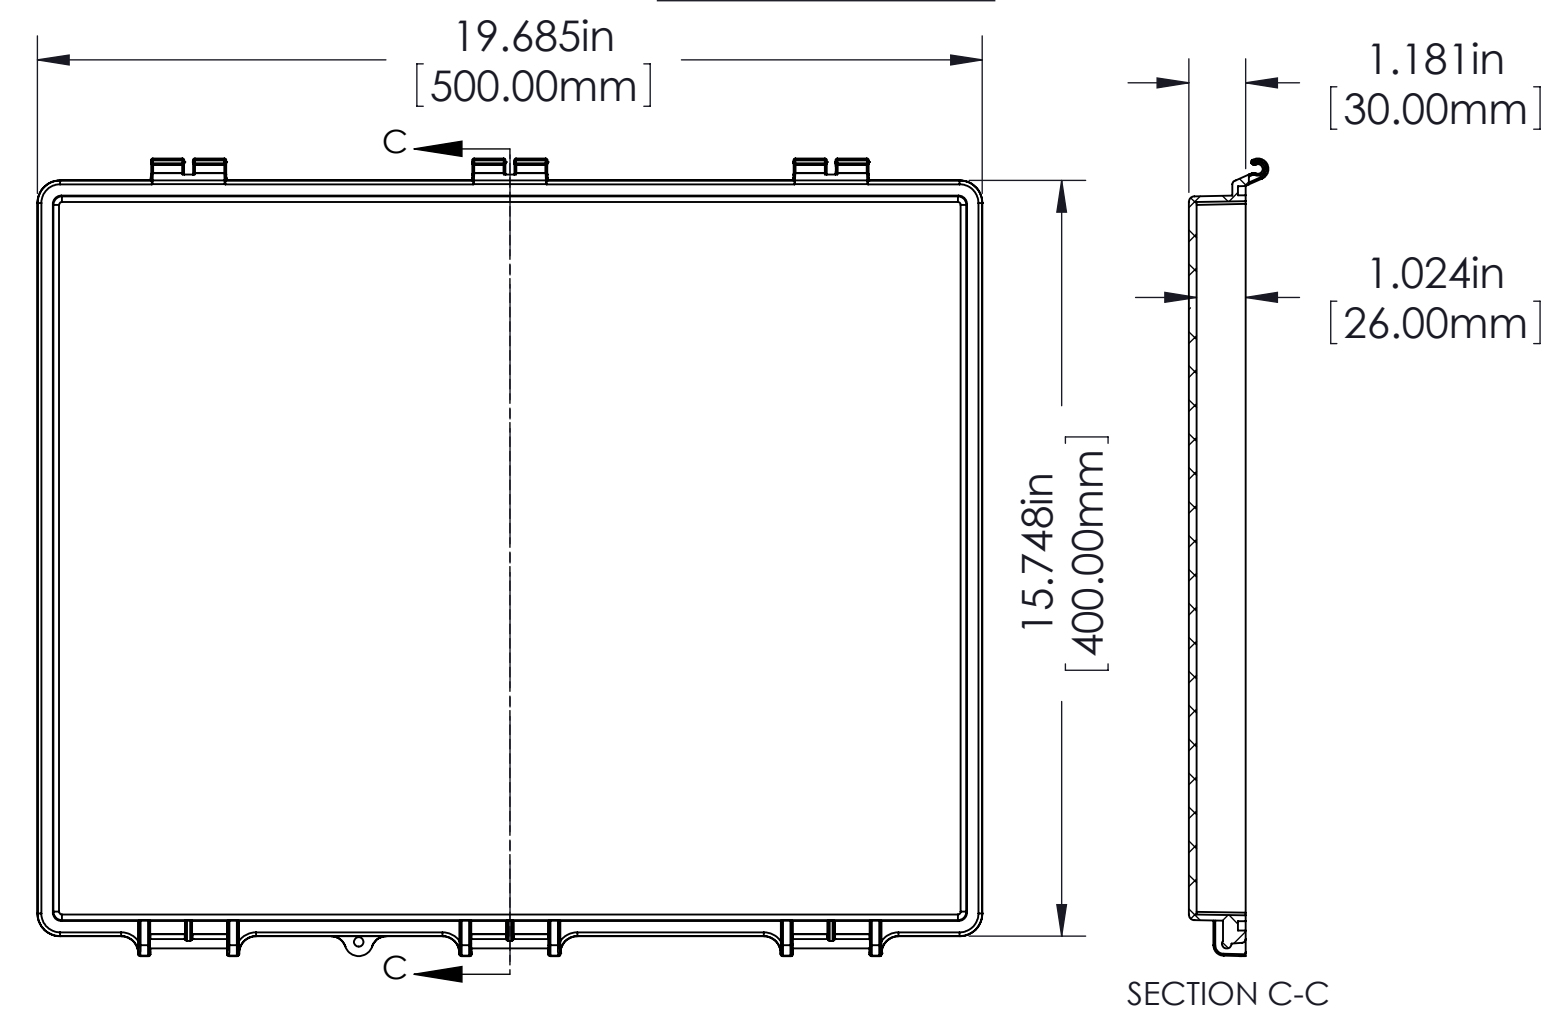

SECTION C-C

ASSEMBLY

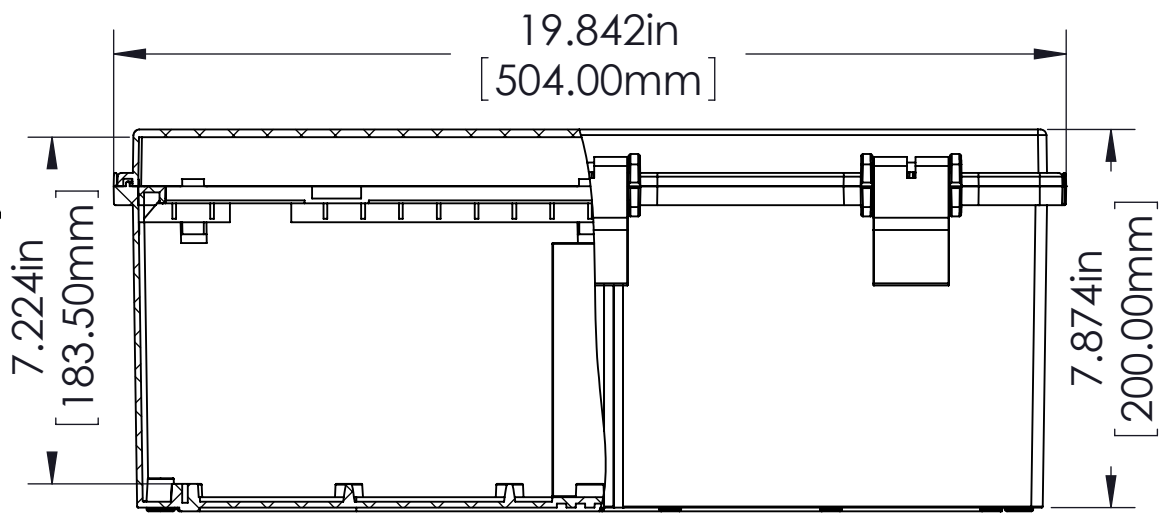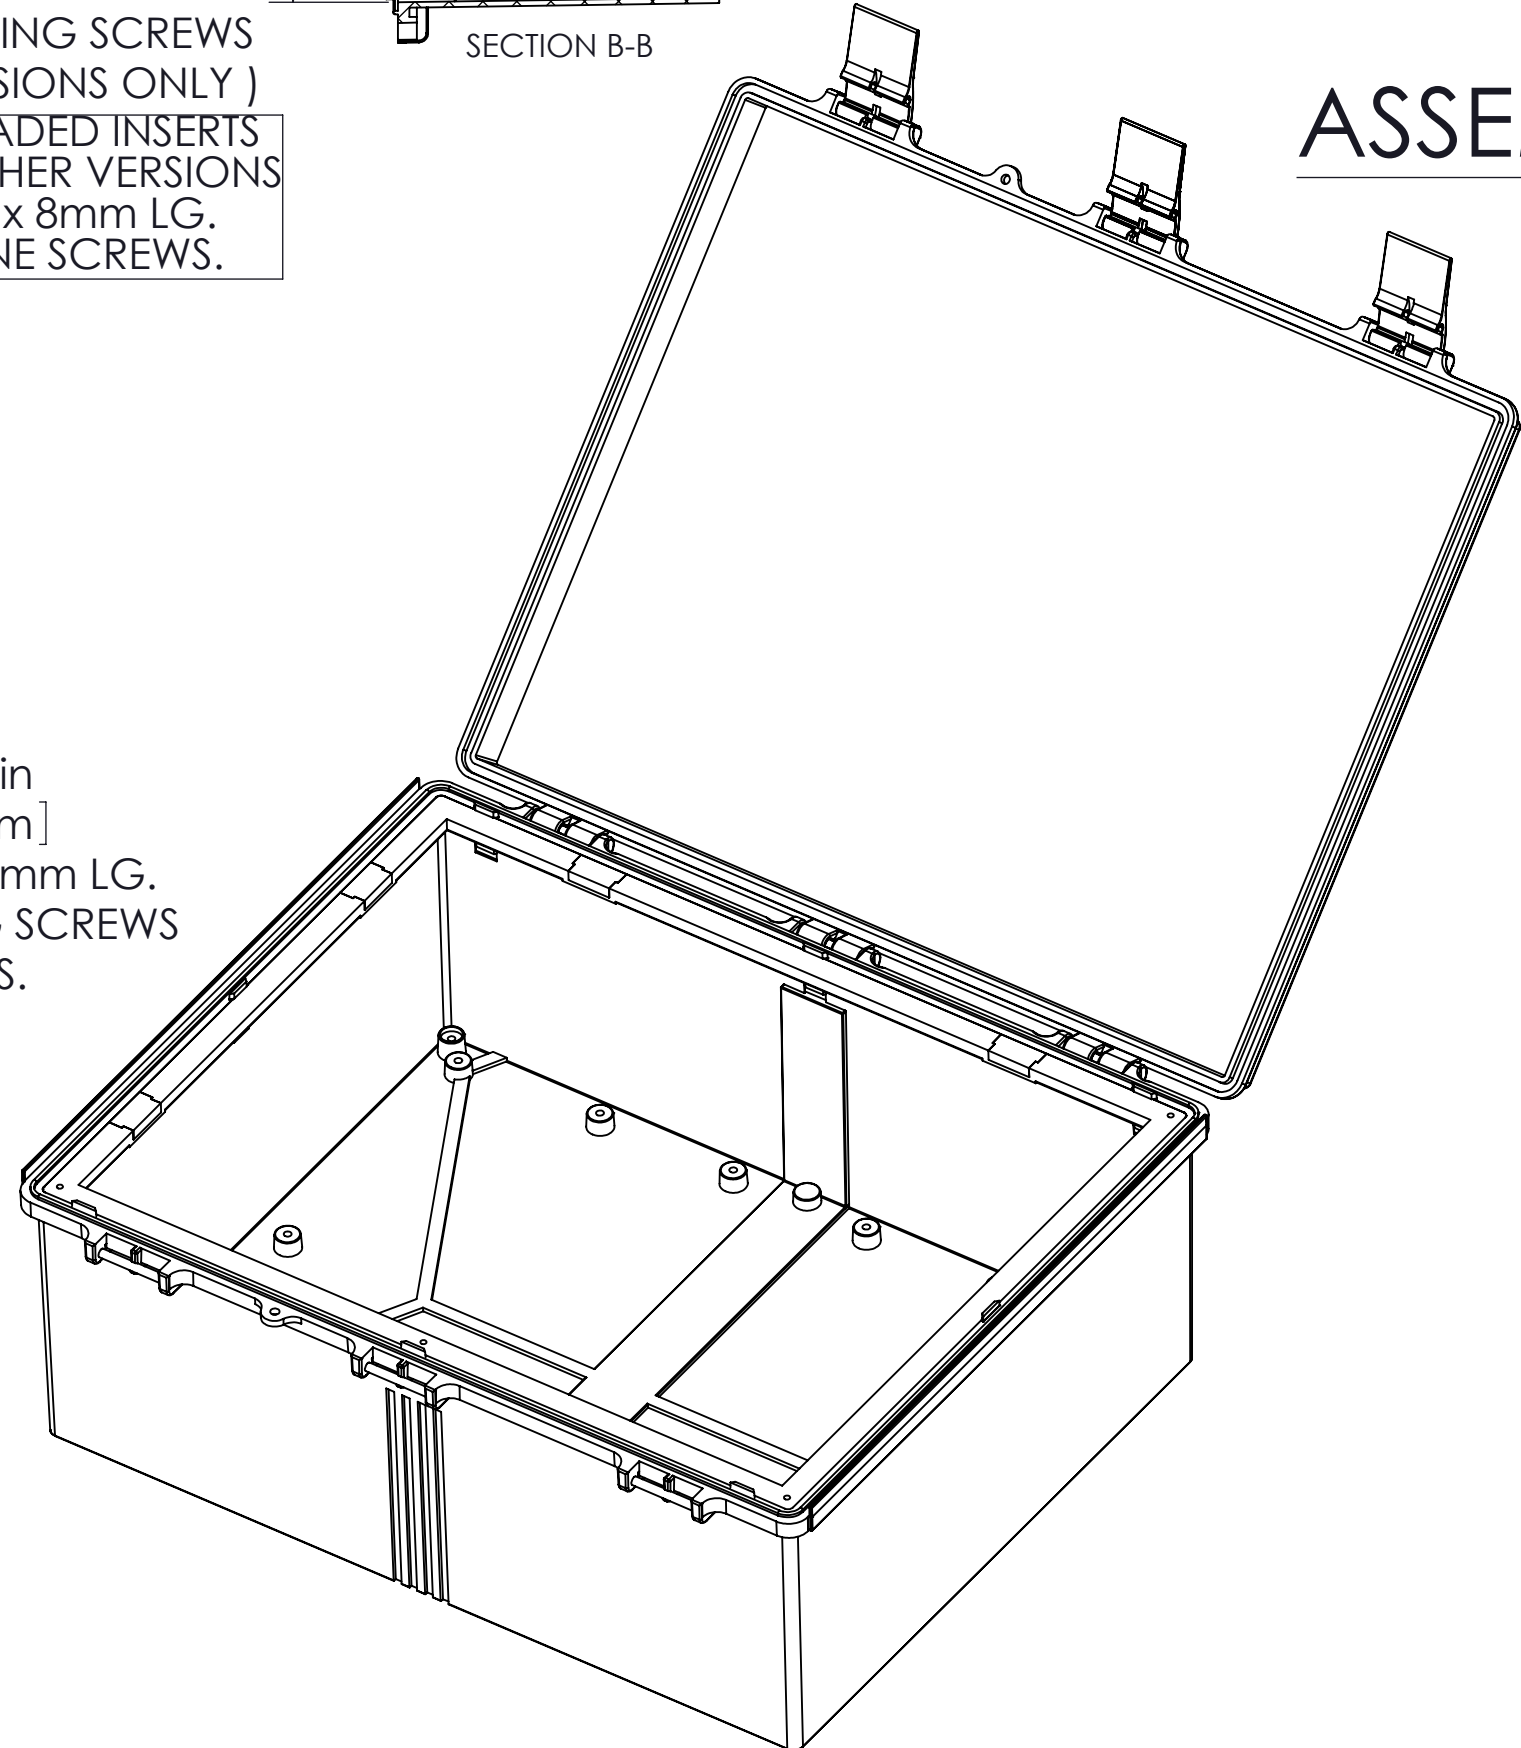

NOTES:

- UNIT COMES COMPLETE WITH
(4) WALL MOUNTING BRACKETS &
(4) M4 x 10mm LG. SELF-TAPPING SCREWS.
(NOT SHOWN)
- BOXES DESIGNED FOR THE FOLLOWING STANDARDS:
NEMA 1,2,4,4X, AND IEC529-IP65 REQUIREMENTS.

TOLERANCE:

ALL DIMENSIONS HAVE ±0.039in [±1mm]
TOLERANCE UNLESS OTHERWISE SPECIFIED.

PART NO.	MATERIAL		USE
	BODY	COVER	
NBF-32034	ABS	ABS	INDOOR
NBF-32134	ABS / PC	ABS / PC	INDOOR
NBF-32234	ABS / PC	CLEAR PC	INDOOR
NBF-32334	PBT / PC	PBT / PC	OUTDOOR
NBF-32434	PBT / PC	CLEAR PC	OUTDOOR

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Bud Industries:

[NBF-32334](#) [NBF-32234](#) [NBF-32434](#) [NBF-32134](#) [NBF-32034](#)