


LOC	DIST	REVISIONS					
E	B	P	LTR	DESCRIPTION	DATE	DWN	APVD
			F	EBD0-0463-04	08DEC04	RS	MG
			F1	REVISED PER ECO-09-020689	24AUG09	KK	AEG

NOTES:

- 1 FOR STRIP VERSION SEE DWG. 164153.
 2 UNDERCOATING: 1,3 μ m Ni.
 SELECTIVE : 0,8 μ m Au.
 ZONE I : BRIGHT TIN PLATED.
 3 UNDERCOATING: 1,3 μ m Ni.
 SELECTIVE : 0,8 μ m Au.
 REMAINDER : GOLDFLASH.
 4 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

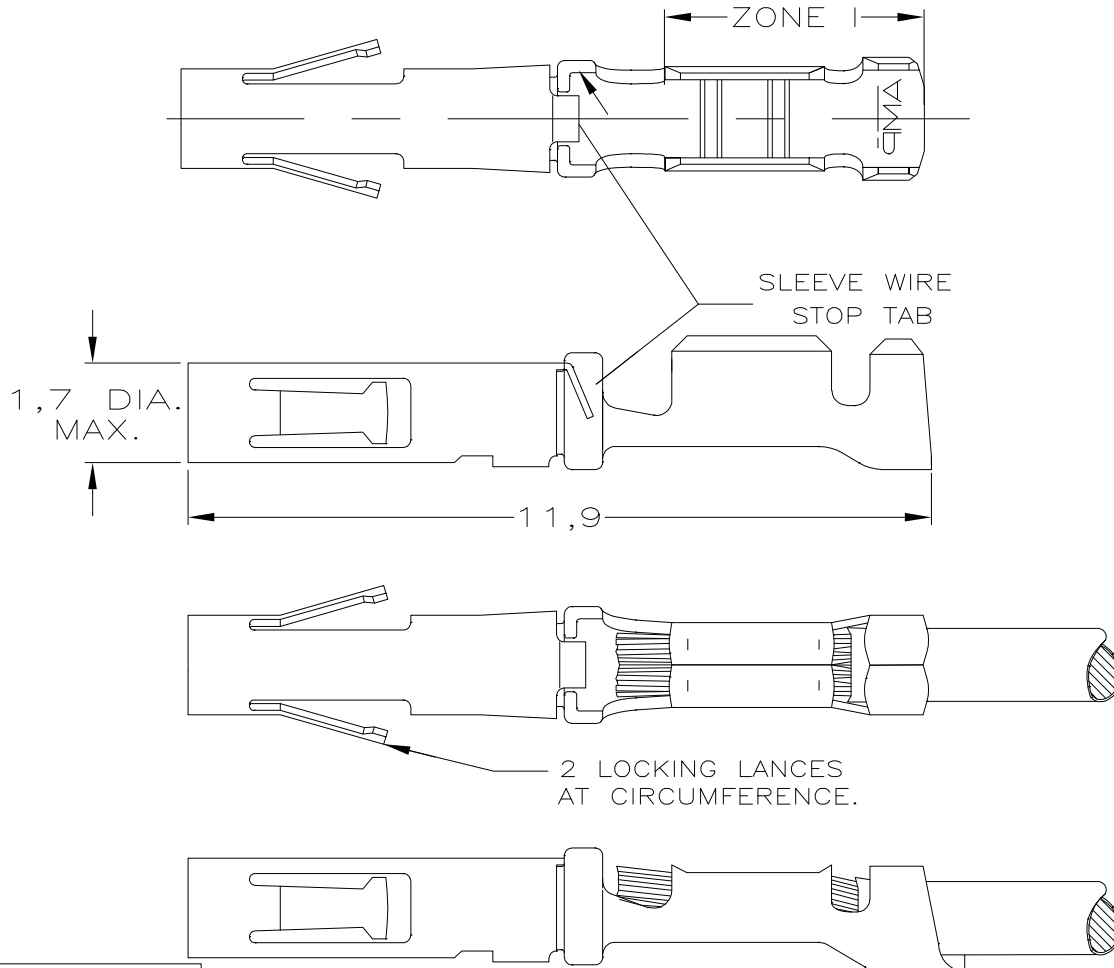

WIRE RANGE :
 24-20 AWG 0,20-0,56 mm²
 INSULATION RANGE :
 1,57 DIA. MAX.

STAINLESS STEEL	SEE NOTE 2	BRASS	164169-4
	PRETINNED		164169-3
	POST TINPLATED		4 164169-2
	SEE NOTE 3		164169-1
MATERIAL OF SLEEVE	PLATING OF BODY	MATERIAL OF BODY	PARTNUMBER

DIMENSIONS: mm	DWN J.v.LIEMPT	6 JAN 1993	MATERIAL —	FINISH —
	CHK C.v.TILBURG	08-02-93	Tyco Electronics Corporation Harrisburg, PA 17105-3608	
TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD L.v.SOEST	08-02-93		
0 PLC ± —	PRODUCT SPEC	—	NAME HDR SOCKET CONTACT TYPE XI (CRIMP SNAP-IN) L.P.	
1 PLC ± —	APPLICATION SPEC	—		
2 PLC ± —	—	—	SIZE A4	CAGE CODE 00779
3 PLC ± —	—	—	DRAWING NO C-164169	RESTRICTED TO —
4 PLC ± —	—	—	—	—
ANGLES ± —	WEIGHT —	—	—	—
		CUSTOMER DRAWING		
		SCALE —	SHEET 1 OF 1	REV F1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[164169-4](#)