





| PERFORMANCE SPECIFICATION | MIN | TYP | MAX | UNITS |
|--|------|------|-------|--------------------|
| Lower Frequency: | | | 60 | MHz |
| Upper Frequency: | 110 | | | MHz |
| Tuning Voltage: | 0.5 | | 10.0 | VDC |
| Supply Voltage: | 4.75 | 5.0 | 5.25 | VDC |
| Output Power: | +5.0 | +8.5 | +12.0 | dBm |
| Supply Current: | | | 25 | mA |
| Harmonic Suppression (2 nd Harmonic): | | -10 | | dBc |
| Pushing: | | | 0.5 | MHz/V |
| Pulling, all Phases: | | | 0.5 | MHz pk-pk |
| Tuning Sensitivity: | | 8 | | MHz/V |
| Phase Noise @ 10kHz offset: | | -114 | | dBc/Hz |
| Phase Noise @ 100kHz offset: | | -135 | | dBc/Hz |
| Load Impedance: | | 50 | | Ω |
| Input Capacitance: | | | 330 | pF |
| Operating Temperature Range: | -40 | | +85 | $^{\circ}\text{C}$ |
| Storage Temperature Range: | -45 | | +90 | $^{\circ}\text{C}$ |

Phase Noise (1 Hz BW, Typical)

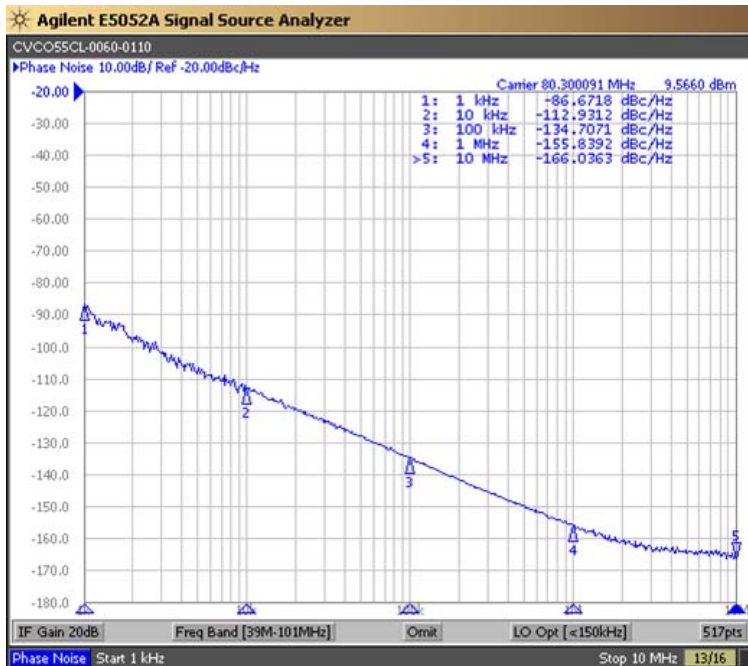




Tuning Curve (Typical)

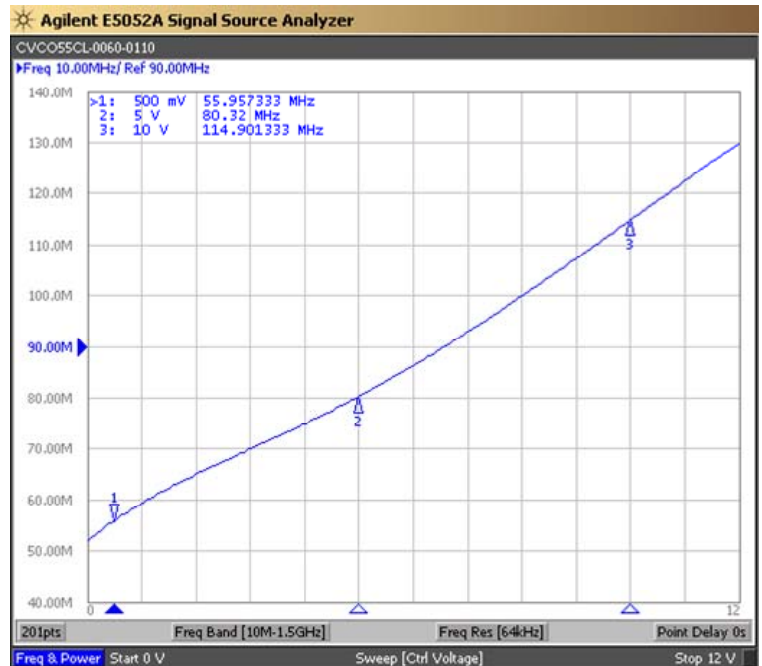


Product Control:

| | | | |
|----------------------|--------------------|---------------|-------------|
| Crystek Part Number: | CVCO55CL-0060-0110 | Release Date: | 22-May-2018 |
| Revision Level: | H | Responsible: | C. Vales |



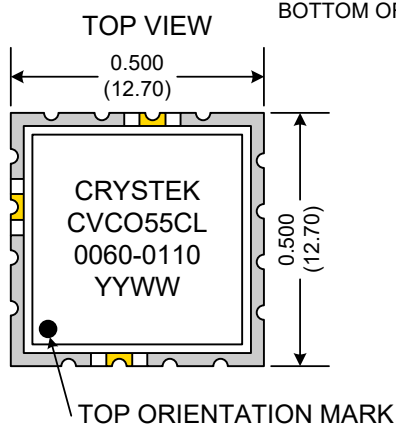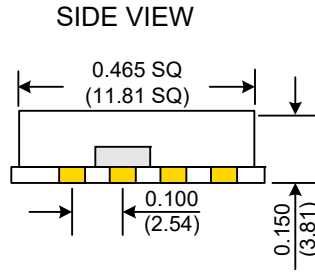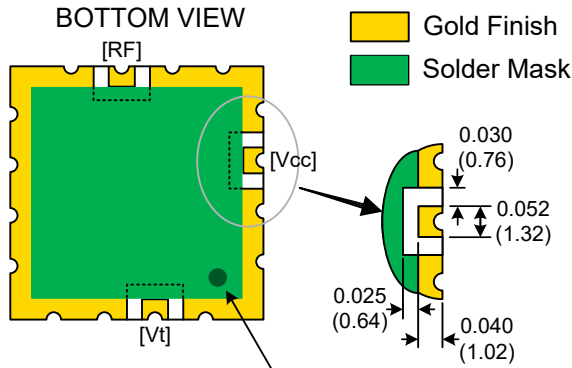


BOTTOM ORIENTATION MARK

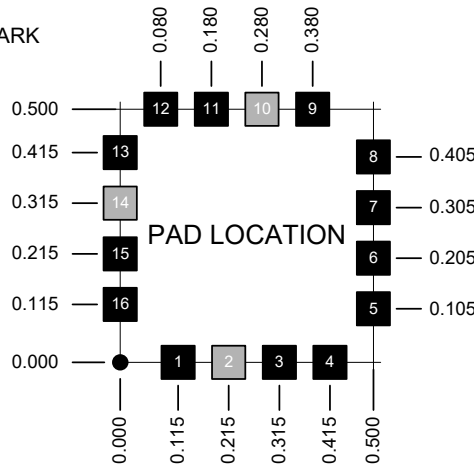

| Pad | Connection |
|--------|------------|
| 2 | Vt |
| 10 | RF-OUTPUT |
| 14 | Vcc |
| Others | GROUND |

- Unless otherwise specified, Dimensions are in: $\frac{IN}{(mm)}$
- Pad Location Dimensions are in: Inches

TAPE AND REEL

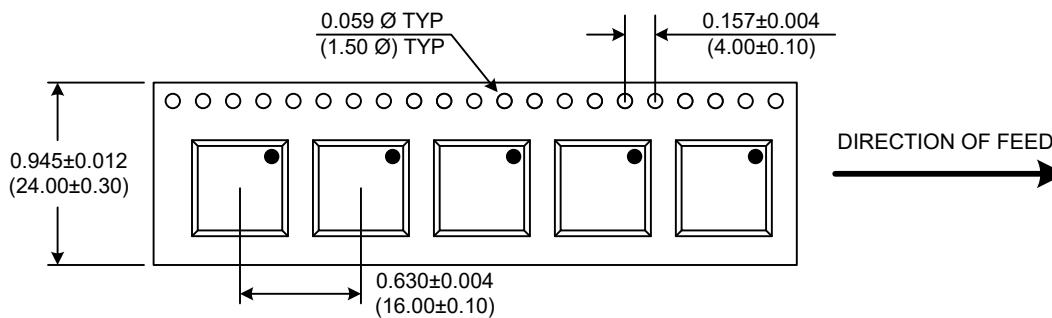

Drawing not to scale

Product Control:

| | | | |
|----------------------|--------------------|---------------|-------------|
| Crystek Part Number: | CVCO55CL-0060-0110 | Release Date: | 22-May-2018 |
| Revision Level: | H | Responsible: | C. Vales |

Specification is subject to change without notice

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Crystek:

[CVCO55CL-0060-0110](#)