

## 20-30W Single and Dual Output DC-DC Converters

### Features

- ◆ Industry Standard 2" x 1.6" Footprint
- ◆ Six Sided Shielding
- ◆ Agency Approved
- ◆ 12V, 24V and 48V Inputs
- ◆ UL, CSA, EN, CE approvals
- ◆ Wide range input



### Key Market Segments & Applications





Specifications		
Model	PXE20	PXE30
Max Output Power	20W	30W
Voltage Accuracy	±2%	±1%
Voltage Adjustment	±10%	
Minimum Load, each output (1)	10%	10%
Line Regulation	±0.2% for single, ±0.5% for dual	
Load Regulation (25% to 100%)	Single ±0.5%, Dual ±3%	Single ±0.5%, Dual ±1%
Cross Regulation (25% to 100%)	Dual ±5%	
Ripple and Noise (P-P)	Single: 75mV; Dual: 100mV	
Start up time	20ms - 1100ms typ.	10 - 25ms typ.
Remote on/off (3)	Positive Logic: ON: Open or 3.5-12V, OFF Short or <1.2V	
Temperature Coefficient	<±0.02%/°C	
Operating Temperature	-40 to +100°C, see derating curve	
Maximum Case Temperature	100°C (Over temperature protection at 115°C - PXE30 model)	
Storage Temperature	-55 to 105°C	
Thermal Shock	MIL-STD-810D	
Relative Humidity (non condensing)	5 to 95%	
Transient Response (25% step load change)	500us recovery	300us recovery
Oversvoltage Protection (Zener clamp)	3.3V: 3.9V, 5V: 6.2V, 12V: 15V, 15V: 18V	
Overcurrent and Short Circuit Protection	Typically at 150%, hiccup with self recovery	
Input Surge Voltage (Maximum for 100ms)	12V input: 36V, 24V input: 50V, 48V input: 100V	
Reflected input ripple (peak to peak) (2)	25mA	30mA
Isolation Voltage	1600VDC minimum (Input-Output, Input-Case)	
Isolation Resistance	10 <sup>9</sup> Ohms minimum	
Isolation Capacitance (max)	300pF	1000pF
Typical Switching Frequency (Fixed)	300kHz	
MTBF (BELLCORE TR-NWT-000332)	1,976,000 hours	1,535,000 hours
Vibration	10 - 55Hz, 2G, 30 minutes each X, Y, Z axis	
Conducted and Radiated Emissions	See Installation Diagrams	
Immunity	EN61000-4-2, -3, -4, -5, -6 Pref Criteria 2	
Safety Agency Approval	IEC60950-1, UL60950-1, EN60950-1, CE Mark (48V input only)	
Size (L x W x H)	2 x 1.6 x 0.4"	
Weight	1.69 oz (48g)	
Warranty	Three Year	

#### Notes:

- (1) To meet regulation & noise specifications. Operation at zero load will not damage the device
- (2) 12uH source impedance in series with + input
- (3) Max sink current 20mA (PXE20), 2.5mA (PXE30); The on/off pin is referenced to the negative input

Model Selector					
Output Volt (V)	Output Curr (A)	Output Power (W)	Input Volt (VDC)	Model	Eff.(%)
<b>Single Outputs</b>					
3.3	6.0	20	9 - 18	PXE30-12S3P3	85
3.3	6.0	20	10 - 40	PXE30-24WS3P3	87
3.3	6.0	20	18 - 36	PXE30-24S3P3	86
3.3	6.0	20	18 - 75	PXE30-48WS3P3	87
3.3	6.0	20	36 - 75	PXE30-48S3P3	87
5	4.0	20	9 - 36	PXE20-24WS05	79
5	4.0	20	18 - 75	PXE20-48WS05	80
5	6.0	30	9 - 18	PXE30-12S05	87
5	6.0	30	10 - 40	PXE30-24WS05	87
5	6.0	30	18 - 36	PXE30-24S05	88
5	6.0	30	18 - 75	PXE30-48WS05	88
5	6.0	30	36 - 75	PXE30-48S05	89
12	1.67	20	9 - 36	PXE20-24WS12	81
12	1.67	20	18 - 75	PXE20-48WS12	81
12	2.5	30	9 - 18	PXE30-12S12	88
12	2.5	30	10 - 40	PXE30-24WS12	87
12	2.5	30	18 - 36	PXE30-24S12	89
12	2.5	30	18 - 75	PXE30-48WS12	87
12	2.5	30	36 - 75	PXE30-48S12	90
15	1.33	20	9 - 36	PXE20-24WS15	81
15	1.33	20	18 - 75	PXE20-48WS15	81
15	2.0	30	9 - 18	PXE30-12S15	88
15	2.0	30	10 - 40	PXE30-24WS15	88
15	2.0	30	18 - 36	PXE30-24S15	89
15	2.0	30	18 - 75	PXE30-48WS15	88
15	2.0	30	36 - 75	PXE30-48S15	90
<b>Dual Outputs</b>					
±5	±2.0	20	9 - 36	PXE20-24WD05	79
±5	±2.0	20	18 - 75	PXE20-48WD05	79
±12	±0.833	20	9 - 36	PXE20-24WD12	81
±12	±0.833	20	18 - 75	PXE20-48WD12	83
±12	±1.25	30	9 - 18	PXE30-12D12	87
±12	±1.25	30	18 - 36	PXE30-24D12	88
±12	±1.25	30	36 - 75	PXE30-48D12	88
±15	±0.666	20	9 - 36	PXE20-24WD15	82
±15	±0.666	20	18 - 75	PXE20-48WD15	84
±15	±1.0	30	9 - 18	PXE30-12D15	87
±15	±1.0	30	18 - 36	PXE30-24D15	88
±15	±1.0	30	36 - 75	PXE30-48D15	88

Pinout		
PIN #	Single Output	Dual Output
1	+ Input	+ Input
2	- Input	- Input
4	Remote on/off	Remote on/off
5	No Pin	+ Output
6	+ Output	Common
7	- Output	- Output
8	Trim	Trim

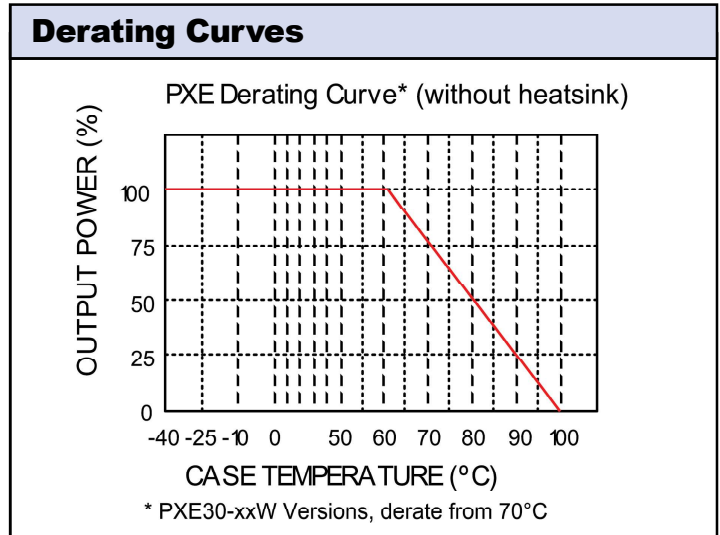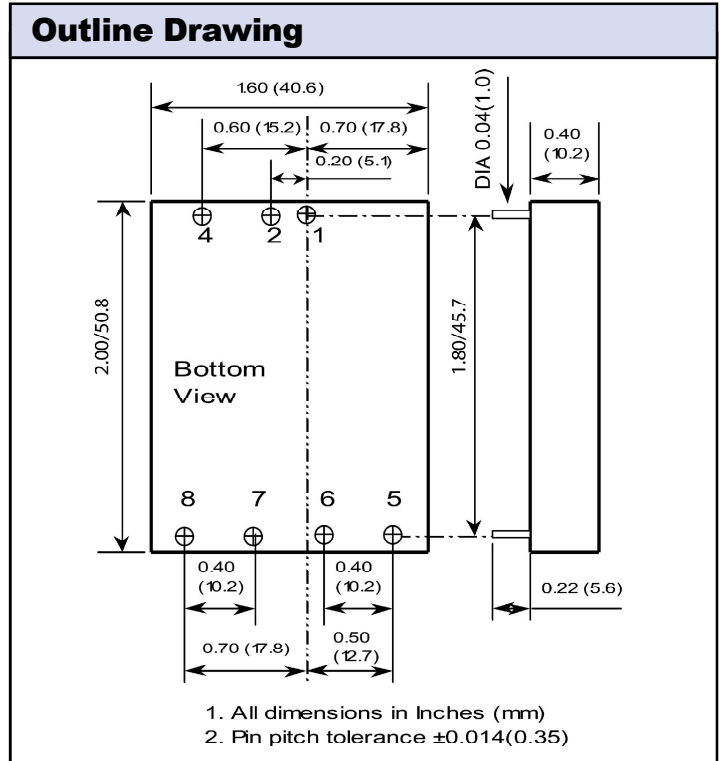

### Heat Sink (0.22" high)

HAPXE (includes thermal adhesive pad)  
HAPXECLIP (two clips required when used)

### Other Industrial Products

CC-E 1.5-25W, 5 to 48VDC input  
PAQ } 50 - 700W quarter, half & full bricks  
PAH }  
PAF }

For Additional Information, please visit [us.tdk-lambda.com/lp/products/px-series.htm](http://us.tdk-lambda.com/lp/products/px-series.htm)



# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## [TDK-Lambda:](#)

[PXE2024WD12](#) [PXE2024WD15](#) [PXE2024WS05](#) [PXE2024WS12](#) [PXE2024WS15](#) [PXE2048WD05](#) [PXE2048WD12](#)  
[PXE2048WD15](#) [PXE2048WS15](#) [PXE3012D12](#) [PXE3012S12](#) [PXE3012S15](#) [PXE3012S3P3](#) [PXE3024D12](#)  
[PXE3024D15](#) [PXE3024S05](#) [PXE3024S15](#) [PXE3024S3P3](#) [PXE3024WD15](#) [PXE3024WS05](#) [PXE3024WS12](#) [PXE30-](#)  
[24WS3P3](#) [PXE3048D12](#) [PXE3048D15](#) [PXE3048S05](#) [PXE3048S12](#) [PXE3048S15](#) [PXE3048S3P3](#) [PXE3048WD12](#)  
[PXE3048WD15](#) [PXE30-48WS05](#) [PXE30-48WS12](#) [PXE30-48WS3P3](#) [PXE2048WS12](#) [PXE3024WS15](#) [PXE3012D15](#)  
[PXE2048WS05](#) [PXE3024S12](#) [PXE2024WD05](#) [PXE3012S05](#) [PXE3024WD12](#) [PXE30-48WS15](#)