

Type 2 surge protection replacement module - VAL-SQ SP 80-120/240S/ FM - 2804000

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




Surge protection device for 120/240 V AC split/single phase configurations. Uses a compact, NEMA rated enclosure that connects easily to an existing enclosure. Hybrid Sine Wave Tracking provides 80 kA surge protection.

Product Description

Surge protection device for 120/240 V AC single/split phase configurations with 80 kA protection

Key Commercial Data

Packing unit	1 pc
GTIN	 4 046356 317122
GTIN	4046356317122

Technical data

Dimensions

Width	250 mm
Depth	122 mm

Ambient conditions

Degree of protection	IP40 / NEMA 1
Ambient temperature (operation)	-40 °C ... 60 °C
Ambient temperature (storage/transport)	-40 °C ... 85 °C
Altitude	3658 m

General

NEMA power supply system	120/240 V Single/Split Phase
Mounting type	3/4 inch NPT male
Type	Parallel hybrid
Surge protection fault message	Phase LEDs
	Audible alarm
	Remote indication contact
Direction of action	3L-N & N-GND

Protective circuit

Type 2 surge protection replacement module - VAL-SQ SP 80-120/240S/ FM - 2804000

Technical data

Protective circuit

IEC test classification	I
Maximum continuous operating voltage U_c	150 V
Response time t_A	< 1 ns

Connection, protective circuit

Connection method	#10 AWG/5.26 mm ² wires (24 in./61 cm long)
Connection technology	3-wire + Gnd
Conductor cross section AWG min.	10
Conductor cross section AWG max.	10

Remote indication contact

Connection method	#24 AWG/0.205 mm ² wires (24 in./61 cm long)
-------------------	---

Standards and Regulations


Standards/regulations	UL 1449 2 nd edition, February 2007
	UL 1283
	IEEE C62.41
	IEEE C62.45

NEMA / UL data

UL type	type 2
Maximum Surge Current per Phase	80 kA
Short-circuit current rating (SCCR)	22 kA
Maximum Circuit Breaker	30 A

Drawings

Circuit diagram

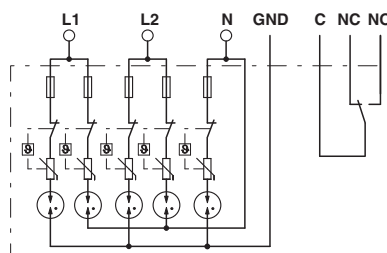

Phoenix Contact 2018 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Phoenix Contact:](#)

[2804000](#)