
	1	2	3	4	5		6	
A		4,5	Mating face according t MIL-C-24308 / DIN 41 6	0		4,5	0	
В	12,9				3 max		0,4 min.	
С		-+	7	2,84	Printed board layou view component side (PCB plating =Tin)	t (1,6±0,2 thick) 33,3		7x [2,]
D				10,4		$\begin{array}{c} \hline 2,74 \\ \hline 2,74 \\ \hline - \hline$		1,42
E	_		<u>-</u>		Mounting force			
F	Part number Performance level 0966 263 7813 AU3 0966 263 6813 AU2 0966 263 5813 0,76μm AU 1	el nut thread 4-40 UNC 4-40 UNC 4-40 UNC 2	3	4		^{nt} EC PD - CN	ZHUANGJ LUC Title D-Sub STD 15	spected by OK

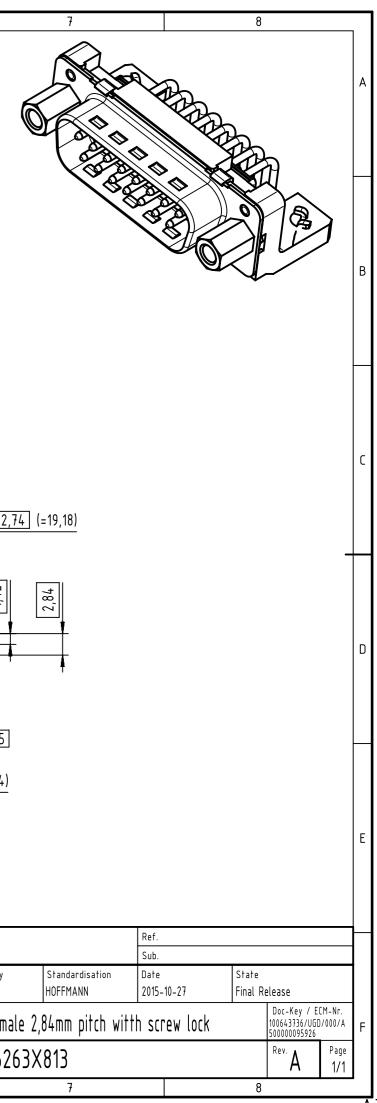

<u>A</u>3

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

HARTING: 09662636813