

Mixers

Double Balanced

Applications

- Wideband Down Converters
- Wideband Up Converters
- Balanced Modulators
- Bi-Phase Modulators
- Phase Detectors



Features


- Extremely Wide IF Bandwidth
- Good LO/RF Isolation
- Multi-Octave Performance
- Good Intercept Point
- Miniature Size
- Connectors Per MIL-C-39012

Electrical Specifications

Frequency <i>GHz</i>	Isolation _{LO-RF} <i>dB Min/Typ</i>	Convers. Loss <i>dB Max/Typ</i>	VSWR _{RF} <i>Typ : 1</i>
1.5 - 5.0	18/28	8.5/7.0	3.5
IF Freq. ¹ <i>MHz</i>	RF Power ² <i>Input dBm</i>	LO Power <i>dBm Nominal</i>	
DC-1500	+4	+12	

Notes: Impedance: 50 ohms nominal. Meets MIL-E-5400 Class 3 requirements. Additional screening available for military and space applications. 1) Upper IF frequency is the -3 dB response point. 2) At 1dB Compression point **Electrical and Mechanical Specifications subject to change without notice.**

Outline Drawing

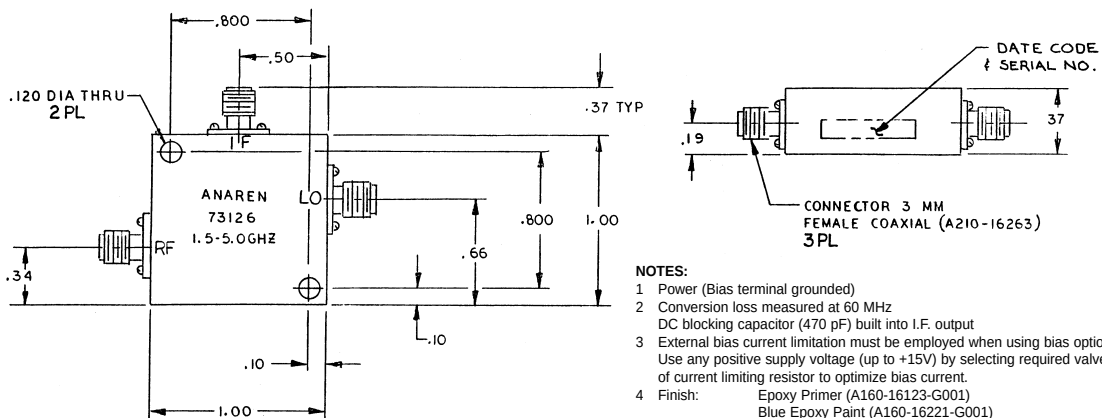

- NOTES:**
- 1 Power (Bias terminal grounded)
 - 2 Conversion loss measured at 60 MHz
DC blocking capacitor (470 pF) built into I.F. output
 - 3 External bias current limitation must be employed when using bias option.
Use any positive supply voltage (up to +15V) by selecting required valve of current limiting resistor to optimize bias current.
 - 4 Finish: Epoxy Primer (A160-16123-G001)
Blue Epoxy Paint (A160-16221-G001)
 - 5 Marking: Marking shall be in accordance with MIL-STD-130
 - 6 Dimensions: Inches

Sales Desk USA: Voice: (800) 544-2414 Fax: (315) 432-9121
Sales Desk Europe: Voice: (+44) 23 92 232392 Fax: (+44) 23 92 251369

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Anaren:](#)

[73126](#)