

Is Now Part of



ON Semiconductor®

To learn more about ON Semiconductor, please visit our website at <u>www.onsemi.com</u>

Please note: As part of the Fairchild Semiconductor integration, some of the Fairchild orderable part numbers will need to change in order to meet ON Semiconductor's system requirements. Since the ON Semiconductor product management systems do not have the ability to manage part nomenclature that utilizes an underscore (_), the underscore (_) in the Fairchild part numbers will be changed to a dash (-). This document may contain device numbers with an underscore (_). Please check the ON Semiconductor website to verify the updated device numbers. The most current and up-to-date ordering information can be found at www.onsemi.com. Please email any questions regarding the system integration to Fairchild_questions@onsemi.com.

ON Semiconductor and the ON Semiconductor logo are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or unavteries, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out or i, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that ON Semiconductor was negligent regarding the design or manufacture of the part. ON Semiconductor and is officers, employees, uniotificated use, even if such claim any manner.



November 2013

FDPF8N60ZUT N-Channel UniFETTM II Ultra FRFETTM MOSFET 600 V, 6.5 A, 1.35 Ω

Features

- $R_{DS(on)}$ = 1.15 Ω (Typ.) @ V_{GS} = 10 V, I_D = 3.25 A
- Low Gate Charge (Typ. 20 nC)
- Low C_{rss} (Typ. 10 pF)
- 100% Avalanche Tested
- · Improved dv/dt Capability
- RoHS Compliant


Applications

- LCD/LED TV
- Lighting
- Uninterruptible Power Supply
- AC-DC Power Supply

Description

UniFETTM II MOSFET is Fairchild Semiconductor's high voltage MOSFET family based on advanced planar stripe and DMOS technology. This advanced MOSFET family has the smallest on-state resistance among the planar MOSFET, and also provides superior switching performance and higher avalanche energy strength. In addition, internal gate-source ESD diode allows UniFET II MOSFET to withstand over 2kV HBM surge stress. UniFET II Ultra FRFET[™] MOSFET has much superior body diode reverse recovery performance. Its t_{rr} is less than 50nsec and the reverse dv/dt immunity is 20V/nsec while normal planar MOSFETs have over 200nsec and 4.5V/nsec respectively. Therefore UniFET II Ultra FRFET MOSFET can remove additional component and improve system reliability in certain applications that require performance improvement of the MOSFET's body diode. This device family is suitable for switching power converter applications such as power factor correction (PFC), flat panel display (FPD) TV power, ATX and electronic lamp ballasts.





MOSFET Maximum Ratings T_C = 25°C unless otherwise noted.


Symbol		Parameter	FDPF8N60ZUT	Unit		
V _{DSS}	Drain to Source Voltage		600	V		
V _{GSS}	Gate to Source Voltage		±30	V		
ID	Drain Current	- Continuous (T _C = 25°C)		6.5*	Α	
		- Continuous (T _C = 100 ^o C)		3.9*	A	
I _{DM}	Drain Current	- Pulsed	(Note 1)	26*	Α	
E _{AS}	Single Pulsed Avalanche Energy (Note 2)		420	mJ		
I _{AR}	Avalanche Current ((Note 1)	6.5	Α	
E _{AR}	Repetitive Avalanche Energy (Note 1)		(Note 1)	13.5	mJ	
dv/dt	Peak Diode Recovery dv/dt (Note 3)		20	V/ns		
P _D	Dower Dissinction	(T _C = 25 ^o C)		34.5	W	
	Power Dissipation	- Derate Above 25°C		0.28	W/ºC	
T _J , T _{STG}	Operating and Storage Temperature Range			-55 to +150	°C	
T	Maximum Lead Temperature for Soldering, 1/8" from Case for 5 Seconds			300	°C	

*Drain current limited by maximum junction temperature


Thermal Characteristics


Symbol	Parameter	FDPF8N60ZUT	Unit	
$R_{ extsf{ heta}JC}$	Thermal Resistance, Junction to Case, Max.	3.6	°C/W	
R_{\thetaJA}	Thermal Resistance, Junction to Ambient, Max.	62.5	°C/W	


racteristics T _C = 25°C u Parameter CS o Source Breakdown Voltage down Voltage Temperature cient Sate Voltage Drain Current o Body Leakage Current CS Threshold Voltage	I _D = I _D = V _{DS} V _{DS}	Tube wise noted. Test Conditions $250 \mu A, V_{GS} = 0 V, T_J = 250 \mu A, Referenced to 3 = 600 V, V_{GS} = 0 V 3 = 480 V, T_C = 125^{\circ}C 3 = \pm 30 V, V_{DS} = 0 V $		Min. 600 - - - -	N/A Typ. - 0.7 - - - - - - - - -	50 Max. - 25 250	Units Unit V/°C μA
Parameter Parame	I _D = I _D = V _{DS} V _{DS}	Test Conditions 250 μA, V _{GS} = 0 V, T _J = 250 μA, Referenced to $_{S} = 600 V, V_{GS} = 0 V$ $_{S} = 480 V, T_{C} = 125^{\circ}C$		600 - - -	- 0.7 - -	- - 25	V V/°C
cs o Source Breakdown Voltage down Voltage Temperature cient sate Voltage Drain Current o Body Leakage Current cs Threshold Voltage	I _D =	250 μA, V _{GS} = 0 V, T _J 250 μA, Referenced to $_{5}$ = 600 V, V _{GS} = 0 V $_{5}$ = 480 V, T _C = 125 ^o C		600 - - -	- 0.7 - -	- - 25	V V/°C
o Source Breakdown Voltage down Voltage Temperature cient sate Voltage Drain Current o Body Leakage Current cs Threshold Voltage	I _D =	250μ A, Referenced to $h_{3} = 600 V$, V _{GS} = 0 V $h_{3} = 480 V$, T _C = 125 ^o C		-	0.7 - -	- 25	V/ºC
o Source Breakdown Voltage down Voltage Temperature cient sate Voltage Drain Current o Body Leakage Current cs Threshold Voltage	I _D =	250μ A, Referenced to $h_{3} = 600 V$, V _{GS} = 0 V $h_{3} = 480 V$, T _C = 125 ^o C		-	0.7 - -	- 25	V/ºC
Iown Voltage Temperature cient Gate Voltage Drain Current D Body Leakage Current CS Chreshold Voltage	I _D =	250μ A, Referenced to $h_{3} = 600 V$, V _{GS} = 0 V $h_{3} = 480 V$, T _C = 125 ^o C		-	-	25	
cient ciate Voltage Drain Current D Body Leakage Current CS Threshold Voltage	V _{DS} V _{DS}	s = 600 V, V _{GS} = 0 V s = 480 V, T _C = 125°C	25°C	-	-	25	
o Body Leakage Current	V _{DS}	_s = 480 V, T _C = 125 ^o C		-	-		μA
o Body Leakage Current	-					250	μι
cs Threshold Voltage	V _{Gt}	_S = ±30 V, V _{DS} = 0 V		-			
hreshold Voltage					-	±10	μA
	VG	_S = V _{DS} , I _D = 250 μA		3.0	-	5.0	V
Drain to Source On Resistance		V _{GS} = 10 V, I _D = 3.25 A		-	1.15	1.35	Ω
rd Transconductance		_S = 40 V, I _D = 3.25 A		-	7	-	S
eristics					1		
					950	1265	pF
	$V_{DS} = 25 \text{ V}, \text{ V}_{GS} = 0 \text{ V},$ f = 1 MHz		_				pF
				_			pF
-	$V_{DS} = 480 \text{ V}, \text{ I}_{D} = 6.5 \text{ A},$ $V_{GS} = 10 \text{ V} $ (Note 4			-			nC
-			_	-	-	-	nC
			(Note 4)	-	8	-	nC
			I				
,	V	- 300 \/ L - 6 5 A		-			ns
			_	-		-	ns
				-			ns
	f -	· · · · · · · · · · · · · · · · · · ·					ns Ω
				0.5	5		32
de Characteristics							
Im Continuous Drain to Source	Diode For	ward Current		-	-	6.5*	Α
Im Pulsed Drain to Source Dio		Forward Current		-	-	26	A
				-	-	1.6	V
e Recovery Time		V _{GS} = 0 V, I _{SD} = 6.5 A,		-	40	-	ns
e Recovery Charge	dI _F /dt = 100 A/µs				42		nC
	um Continuous Drain to Source um Pulsed Drain to Source Dioo o Source Diode Forward Voltag	Capacitance VDC Capacitance f = Se Transfer Capacitance f = Sate Charge at 10V VDC So Source Gate Charge VGC D Drain "Miller" Charge VGC D Drain "Miller" Charge VGC Cteristics VDC In Delay Time RG If Delay Time RG If Fall Time Interference Ident Series Resistance f = Ce Characteristics Jum Continuous Drain to Source Diode Forward Im Pulsed Drain to Source Diode Forward VGC D Source Diode Forward Voltage VGC	Capacitance $V_{DS} = 25 \text{ V}, V_{GS} = 0 \text{ V},$ f = 1 MHzCapacitancef = 1 MHzSe Transfer Capacitance $V_{DS} = 480 \text{ V}, I_D = 6.5 \text{ A},$ $V_{GS} = 10 \text{ V}$ Source Gate Charge $V_{DS} = 480 \text{ V}, I_D = 6.5 \text{ A},$ $V_{GS} = 10 \text{ V}$ Drain "Miller" Charge $V_{DD} = 300 \text{ V}, I_D = 6.5 \text{ A},$ $R_G = 25 \Omega, V_{GS} = 10 \text{ V}$ In Delay Time $V_{DD} = 300 \text{ V}, I_D = 6.5 \text{ A},$ $R_G = 25 \Omega, V_{GS} = 10 \text{ V}$ If Fall TimeIntermediate for the formation of the f	Capacitance $V_{DS} = 25 \text{ V}, V_{GS} = 0 \text{ V},$ f = 1 MHzSee Transfer Capacitancef = 1 MHzSeate Charge at 10V $V_{DS} = 480 \text{ V}, I_D = 6.5 \text{ A},$ $V_{GS} = 10 \text{ V}$ Source Gate Charge $V_{GS} = 10 \text{ V}$ Source Gate Charge $V_{GS} = 10 \text{ V}$ Source Gate Charge $V_{DD} = 300 \text{ V}, I_D = 6.5 \text{ A},$ Source Time $V_{DD} = 300 \text{ V}, I_D = 6.5 \text{ A},$ In Delay Time $V_{DD} = 300 \text{ V}, I_D = 6.5 \text{ A},$ If Delay Time $R_G = 25 \Omega, V_{GS} = 10 \text{ V}$ If Fall Time(Note 4)Ient Series Resistancef = 1 MHzde Characteristicsum Continuous Drain to Source Diode Forward Currentum Pulsed Drain to Source Diode Forward CurrentSource Diode Forward CurrentU Pulsed Drain to Source Diode Forward CurrentDiode Forward VoltageV_{GS} = 0 V, I_{SD} = 6.5 \text{ A}	Capacitance $V_{DS} = 25 \text{ V}, V_{GS} = 0 \text{ V},$ f = 1 MHz-Capacitancef = 1 MHz-Se Transfer Capacitance-State Charge at 10V $V_{DS} = 480 \text{ V}, I_D = 6.5 \text{ A},$ $V_{GS} = 10 \text{ V}$ -O Source Gate Charge $V_{GS} = 10 \text{ V}$ -O Drain "Miller" Charge(Note 4)-TetristicsIn Delay Time ff Delay Time ff Fall Time $V_{DD} = 300 \text{ V}, I_D = 6.5 \text{ A},$ $R_G = 25 \Omega, V_{GS} = 10 \text{ V}$ -In Series Resistancef = 1 MHz0.5Other Series Resistancef = 1 MHz0.5Other Continuous Drain to Source Diode Forward Current um Pulsed Drain to Source Diode Forward Current-O Source Diode Forward Voltage $V_{GS} = 0 \text{ V}, I_{SD} = 6.5 \text{ A}$ -	Capacitance $V_{DS} = 25 \text{ V}, V_{GS} = 0 \text{ V}, f = 1 \text{ MHz}$ -950Gapacitance-110se Transfer Capacitance-10sate Charge at 10V $V_{DS} = 480 \text{ V}, I_D = 6.5 \text{ A}, V_{GS} = 10 \text{ V}$ -20o Source Gate Charge $V_{GS} = 10 \text{ V}$ -5o Drain "Miller" Charge(Note 4)-8cteristics-20-5on Delay Time $V_{DD} = 300 \text{ V}, I_D = 6.5 \text{ A}, R_G = 25 \Omega, V_{GS} = 10 \text{ V}$ -20ff Delay TimeR_G = 25 \Omega, V_{GS} = 10 \text{ V}-30-ff Fall Time(Note 4)-35-55de Characteristicsf = 1 \text{ MHz}0.555um Continuous Drain to Source Diode Forward Currentum Pulsed Drain to Source Diode Forward Currento Source Diode Forward Voltage $V_{GS} = 0 \text{ V}, I_{SD} = 6.5 \text{ A}$	Capacitance $V_{DS} = 25 \text{ V}, V_{GS} = 0 \text{ V},$ - 950 1265 capacitance f = 1 MHz - 110 150 is ate Charge at 10V $V_{DS} = 480 \text{ V}, I_D = 6.5 \text{ A},$ - 20 26 is Source Gate Charge $V_{GS} = 10 \text{ V}$ - 5 - is Deain "Miller" Charge $V_{GS} = 10 \text{ V}$ - 8 - cteristics - 100 15 - in Delay Time $V_{DD} = 300 \text{ V}, I_D = 6.5 \text{ A},$ - 20 50 in Rise Time $V_{DD} = 300 \text{ V}, I_D = 6.5 \text{ A},$ - 30 70 if Delay Time $V_{CD} = 300 \text{ V}, I_D = 6.5 \text{ A},$ - 30 70 if F all Time $V_{DD} = 300 \text{ V}, I_D = 6.5 \text{ A},$ - 35 80 ilent Series Resistance f = 1 MHz 0.5 5 11 de Characteristics - - 6.5* 11 ium Continuous Drain to Source Diode Forward Current - - 26 ium Pulsed Drain to Source

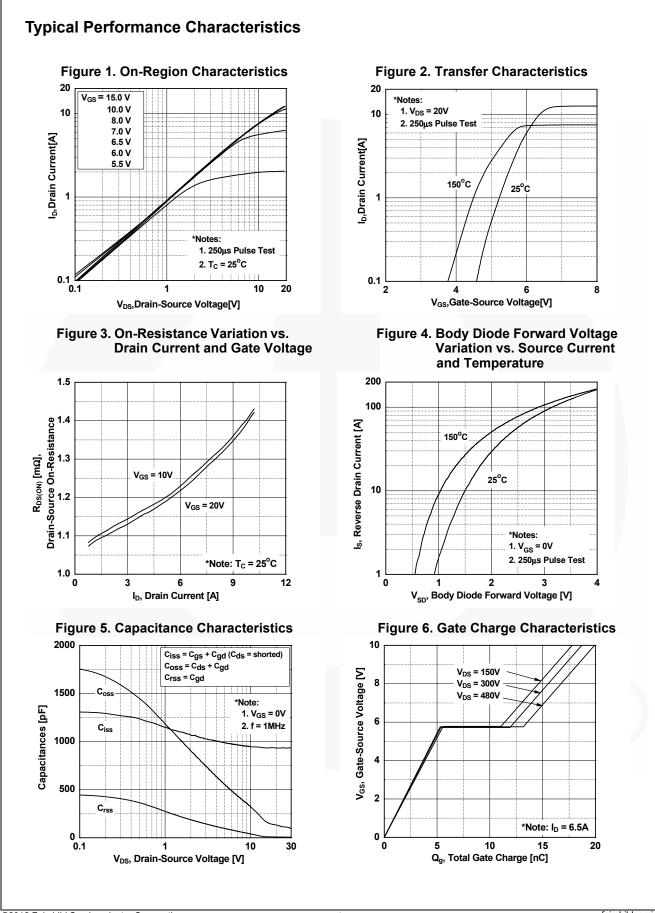


©2012 Fairchild Semiconductor Corporation FDPF8N60ZUT Rev. C2

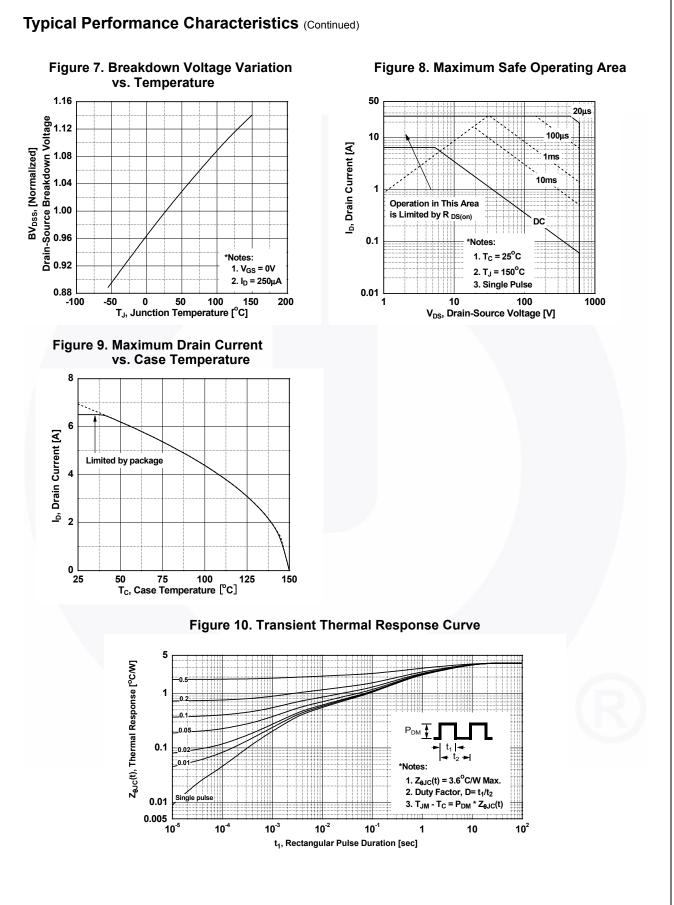

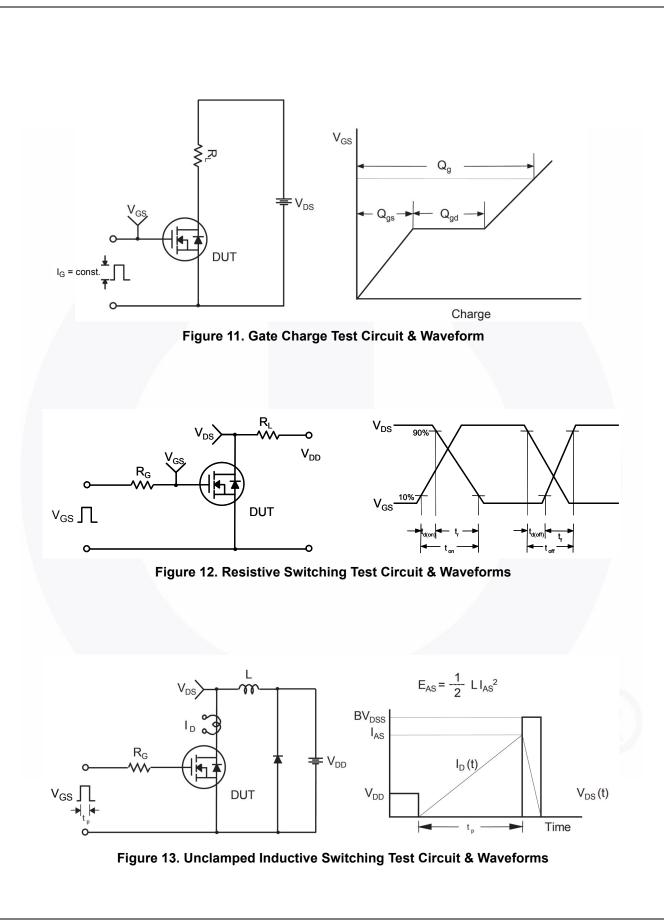

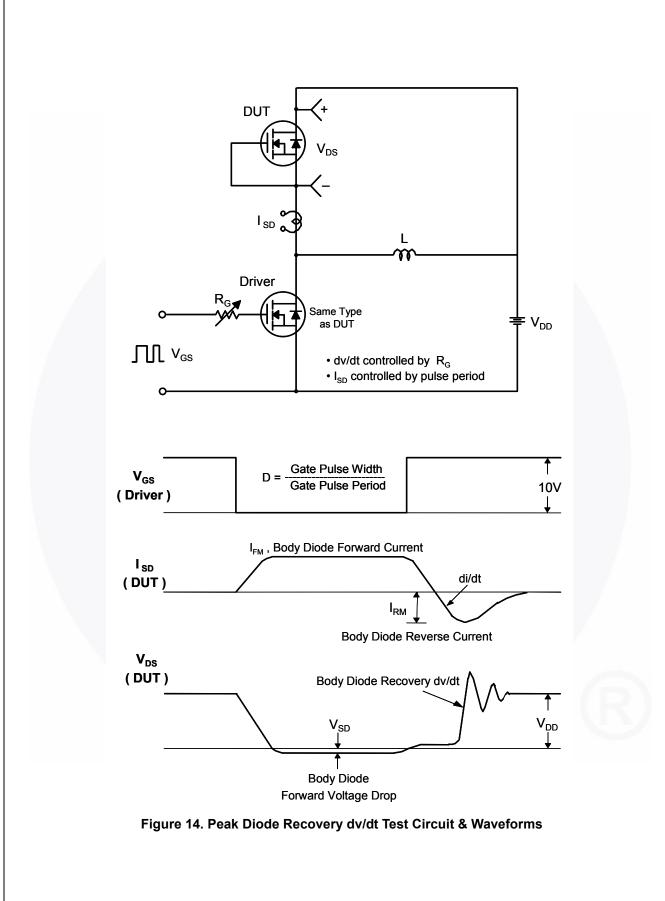

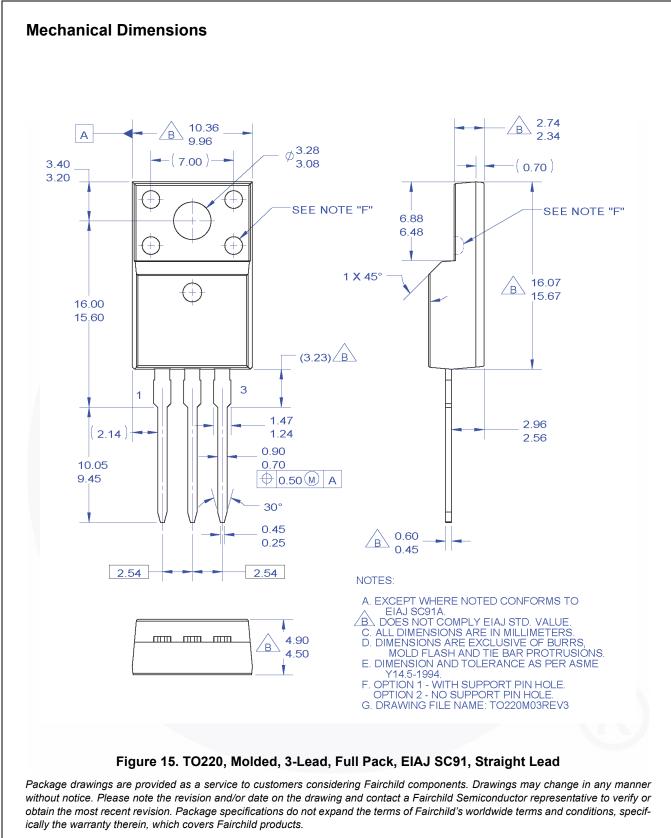

Always visit Fairchild Semiconductor's online packaging area for the most recent package drawings:

http://www.fairchildsemi.com/package/packageDetails.html?id=PN_TF220-003



TRADEMARKS

The following includes registered and unregistered trademarks and service marks, owned by Fairchild Semiconductor and/or its global subsidiaries, and is not intended to be an exhaustive list of all such trademarks.

airchild® Fairchild Semiconductor® FACT Quiet Series™ FACT® FAST® FastvCore™ FETBench™ FPS™

E-PES™ FRFET® Global Power ResourceSM GreenBridge™ Green FPS™ Green FPS™ e-Series™ G*max*™ GTO™ IntelliMAX™ **ISOPLANAR™** Marking Small Speakers Sound Louder and Better™ MegaBuck™ MICROCOUPLER™ MicroFET™ MicroPak™ MicroPak2™ MillerDrive™ MotionMax™ mWSaver® OptoHiT™ **OPTOLOGIC® OPTOPLANAR[®]**

 $(1)_{\mathbb{R}}$ PowerTrench[®] PowerXS™ Programmable Active Droop™ QFET QS™ Quiet Series™ RapidConfigure[™] Saving our world, 1mW/W/kW at a time™ SignalWise™ SmartMax™ SMART START™ Solutions for Your Success™ SPM[®] STEALTH™ SuperFET[®] SuperSOT™-3 SuperSOT™-6 SuperSOT™-8 SupreMOS®

Sync-Lock™ **E**SYSTEM^{®*} GENERAL TinyBoost[®] TinyBuck® TinyCalc™ TinvLogic® TINYOPTO™ TinvPower™ TinyPWM™ TinyWire™ TranSiC™ TriFault Detect™ TRUECURRENT®* uSerDes™ UHC® Ultra FRFET™ UniFFT™ VCX™ VisualMax™ VoltagePlus™

XS™

*Trademarks of System General Corporation, used under license by Fairchild Semiconductor.

DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION, OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS. THESE SPECIFICATIONS DO NOT EXPAND THE TERMS OF FAIRCHILD'S WORLDWIDE TERMS AND CONDITIONS, SPECIFICALLY THE WARRANTY THEREIN, WHICH COVERS THESE PRODUCTS.

SvncFET™

LIFE SUPPORT POLICY FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION.

As used here in:

- Life support devices or systems are devices or systems which, (a) are 1. intended for surgical implant into the body or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
- 2. A critical component in any component of a life support, device, or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

ANTI-COUNTERFEITING POLICY

Fairchild Semiconductor Corporation's Anti-Counterfeiting Policy. Fairchild's Anti-Counterfeiting Policy is also stated on our external website, www.Fairchildsemi.com, under Sales Support.

Counterfeiting of semiconductor parts is a growing problem in the industry. All manufactures of semiconductor products are experiencing counterfeiting of their parts. Customers who inadvertently purchase counterfeit parts experience many problems such as loss of brand reputation, substandard performance, failed application, and increased cost of production and manufacturing delays. Fairchild is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. Fairchild strongly encourages customers to purchase Fairchild parts either directly from Fairchild or from Authorized Fairchild Distributors who are listed by country on our web page cited above. Products customers buy either from Fairchild directly or from Authorized Fairchild Distributors are genuine parts, have full traceability, meet Fairchild's quality standards for handing and storage and provide access to Fairchild's full range of up-to-date technical and product information. Fairchild and our Authorized Distributors will stand behind all warranties and will appropriately address and warranty issues that may arise. Fairchild will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources. Fairchild is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.

PRODUCT STATUS DEFINITIONS Definition of Terms

Datasheet Identification	Product Status	Definition
Advance Information	Formative / In Design	Datasheet contains the design specifications for product development. Specifications may change in any manner without notice.
Preliminary	First Production	Datasheet contains preliminary data; supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve design.
No Identification Needed	Full Production	Datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve the design.
Obsolete	Not In Production	Datasheet contains specifications on a product that is discontinued by Fairchild Semiconductor. The datasheet is for reference information only.

ON Semiconductor and are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at <u>www.onsemi.com/site/pdf/Patent-Marking.pdf</u>. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor has against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death ass

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor 19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada Email: orderlit@onsemi.com N. American Technical Support: 800–282–9855 Toll Free USA/Canada Europe, Middle East and Africa Technical Support: Phone: 421 33 790 2910

Japan Customer Focus Center Phone: 81-3-5817-1050 ON Semiconductor Website: www.onsemi.com

Order Literature: http://www.onsemi.com/orderlit

For additional information, please contact your local Sales Representative

© Semiconductor Components Industries, LLC

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

ON Semiconductor: <u>FDPF8N60ZUT</u>