


CONNETTORE TIPO B (CON MOLLA DI RITEGNO INTERNA)
CONNECTOR TYPE B (WITH INTERNAL SPRING)

SCALA NON IMPEGNATIVA
(DO NOT SCALE)
DIMENSIONI IN mm
(DIMENSIONS IN mm)

METRIC

PROIEZIONE EUROPEA
(EUROPEAN PROJECTION)

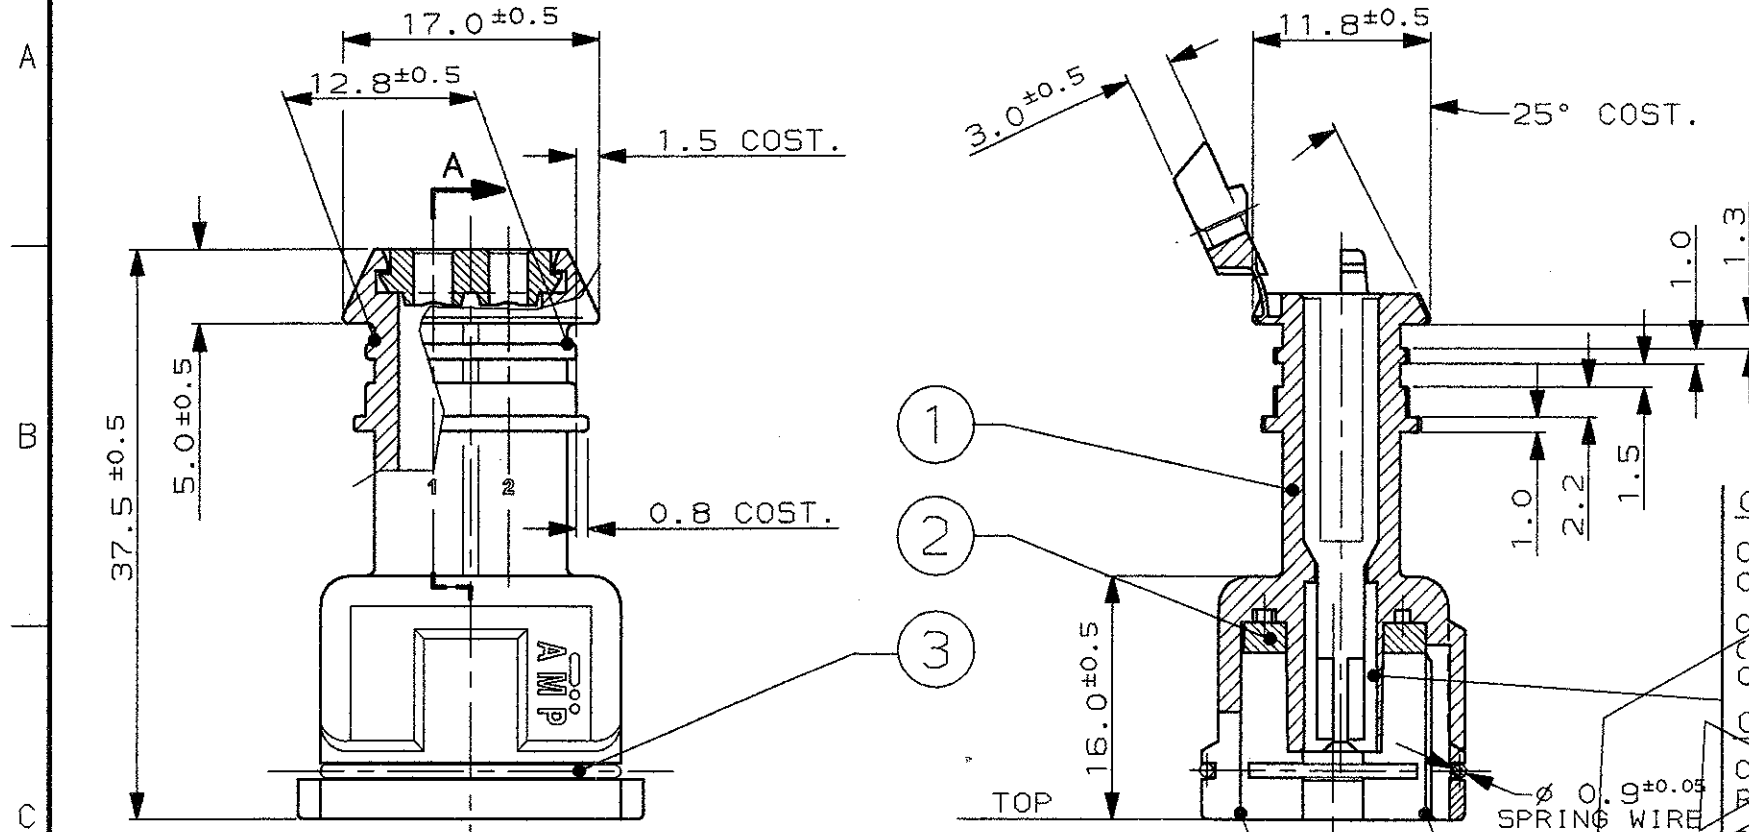

SEZIONE A-A
(SECTION A-A)

CAVITA' ADATTA PER TERMINALI JUNIOR POWER TIMER:

CONTATTO P/N 929939-1 0 -3 CON GOMMINO P/N 828904-1
CAVO ISOLANTE RIDOTTO Ø1.5-2.1mm; SEZIONE 0.5-1.0mm²

CONTATTO P/N 929937-1 0 -3 CON GOMMINO P/N 828905-1
(O GOMMINO P/N 282536-1 SOLO PER CAVI SEZIONE 2.5mm²)
CAVO ISOLANTE RIDOTTO Ø2.2-3.0mm; SEZIONE 1.5-2.5mm²


CAVITY SUITABLE FOR JUNIOR POWER TIMER CONTACT:

CNT. P/N 929939-1 OR -3 PLUS WIRE SEAL P/N 828904-1
REDUCED INS. CABLE Ø1.5-2.1mm; WIRE RANGE 0.5-1.0mm²

CNT. P/N 929937-1 OR -3 PLUS WIRE SEAL P/N 828905-1
(OR WIRE SEAL P/N 282536-1 ONLY FOR WIRE SECT. 2.5 mm²)
REDUCED INS. CABLE Ø2.2-3.0mm; WIRE RANGE 1.5-2.5mm²

- PER DIMENSIONI CONTROPARTE VEDERE FOGLIO 2 DI 2.
(- FOR PIN HEADER DIMENSIONS SEE SHEET 2 OF 2).

PASSO 5.0±0.15
(PITCH 5.0±0.15)

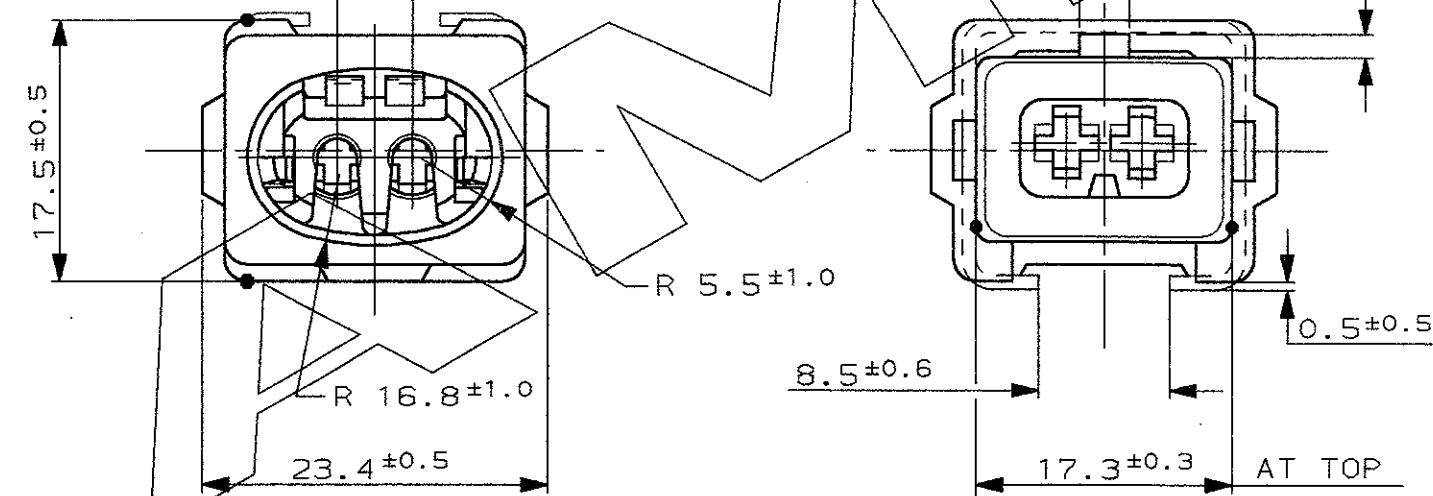

VISTA DA K
(VIEW FROM K)

ROSSO (RED)	282788-8
GIALLO (YELLOW)	282788-7
MARRONE (BROWN)	282788-6
BLU (BLUE)	282788-5
VERDE (GREEN)	282788-4
NATURALE (NATUR)	282788-3
GRIGIO (GREY)	282788-2
NERO (BLACK)	282788-1

COLORE (COLOR)	NUMERO (PART N°.)	N° (ITEM)	FINITURA / COLORE (FINISH / COLOUR)	MATERIALE (MATERIAL)	DESCRIZIONE (DESCRIPTION)
-------------------	----------------------	--------------	--	-------------------------	------------------------------

3	///////	ACCIAIO INOX (STAINLESS STEEL)	MOLLA (SPRING)
2	NATURALE (NATURAL)	GOMMA (RUBBER)	GUARNIZIONE (RUBBER GASKET)
1	///////	PA 6.6	BLOCCHETTO (HOUSING)

CUSTOMER DWG. FOR REFERENCE ONLY		DISEGNO PER CLIENTE SOLO PER RIFERIMENTO	
-------------------------------------	--	---	--

THIS DRAWING IS UNPUBLISHED - RELEASE FOR PUBLICATION		19	
---	--	----	--

© COPYRIGHT 19 BY AMP INCORPORATED, HARRISBURG, PA. ALL INTERNATIONAL RIGHT RESERVED. AMP PRODUCTS MAY BE COVERED BY U.S. AND FOREIGN PATENT AND/OR PATENT PENDING			
--	--	--	--

TOLLERANZE, SE NON DIVERSAMENTE SPECIFICATO (TOLERANCES, UNLESS OTHERWISE SPECIFIED)	DIAM. ISOLANTE (INS. DIA. RANGE) 1.5-3.0 (REDUCED INS. CABLE)	RANGO FILO (WIRE RANGE) 0.5-2.5 mm ²	SCALA (SCALE) ***
---	--	---	-------------------------

C ECR-14-003472	MP	24 MAR 2014	± 0.3
-----------------	----	-------------	-------

B IN PRODUZIONE (RELEASED FOR PRODUCTION) EC ET00-0325-96	A.F.	26 JUL '96	ANGOLI (ANGLES) ± 2°
---	------	------------	----------------------------

A1 REVISED PER EC ET00-0096	A.F.	26 FEB '96	DIS. 22 DEC 95 (DR.) R. MARTINI
-----------------------------	------	------------	---------------------------------------




A FIRST ISSUE PER EC ET00-0004-96 (PROP. NO. WAS 95-51276)	R.M.	03-01 '96	CONT. 22 DEC 95 (CHK) C. TARTARI
--	------	-----------	--

REV. (REV. LTR.)	REVISIONI (REVISION RECORD)	DIS. DATA (DR. DATE)	APP. (APP.)
------------------	--------------------------------	-------------------------	-------------

LOC. SIZE	NUMERO (CONEG NO.)	REV.	FOGLIO (SHEET)
-----------	-----------------------	------	-------------------

I A3	C-282788	C	1 DI 2 (1 OF 2)
------	----------	---	--------------------

DISTRIBUZIONE
(PRINT DIST.)

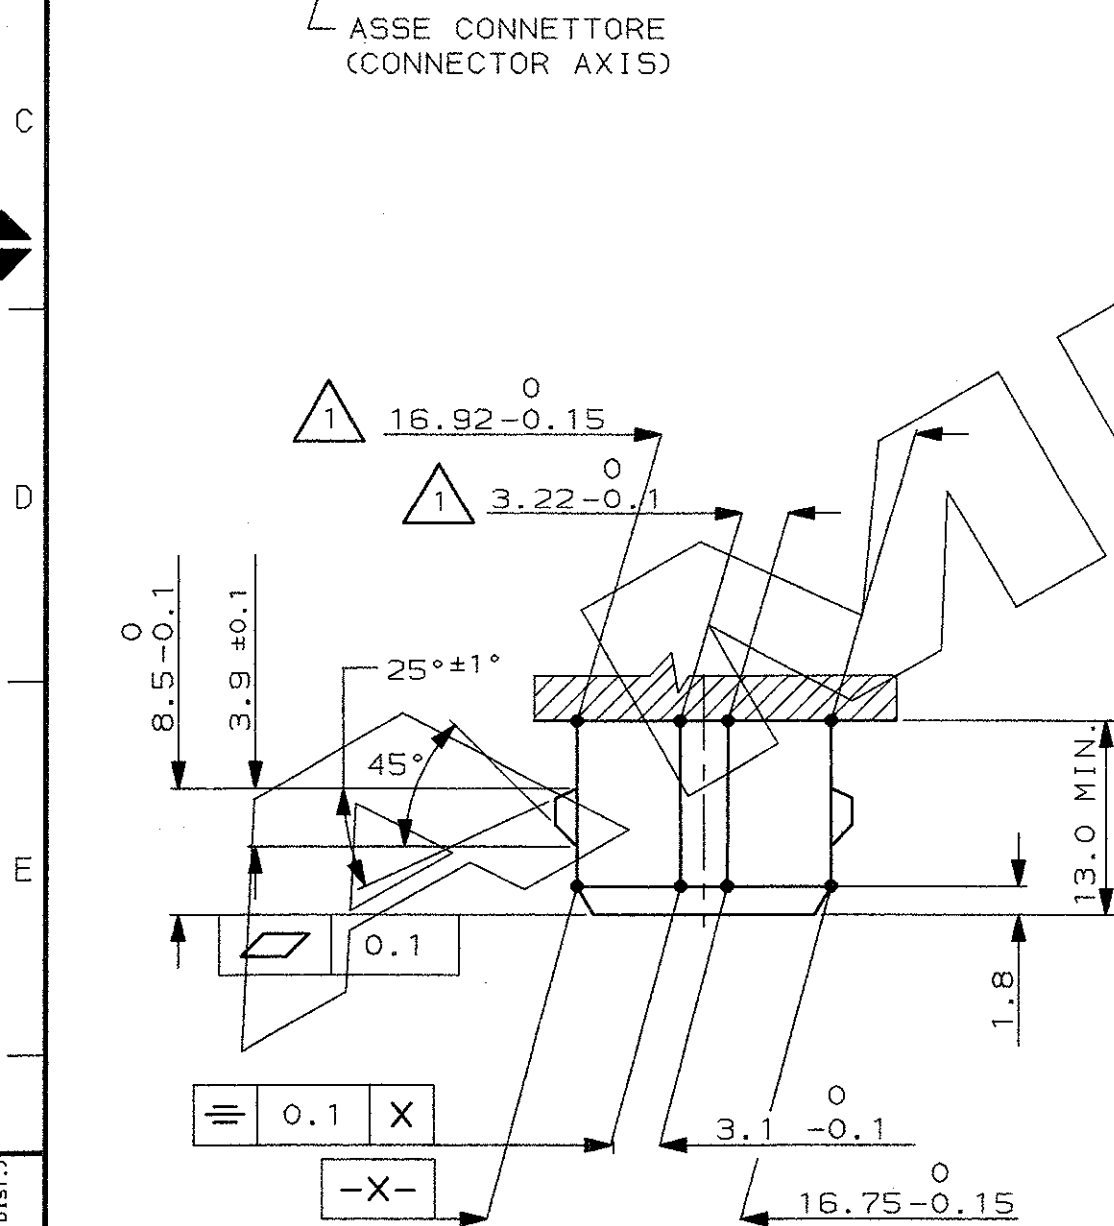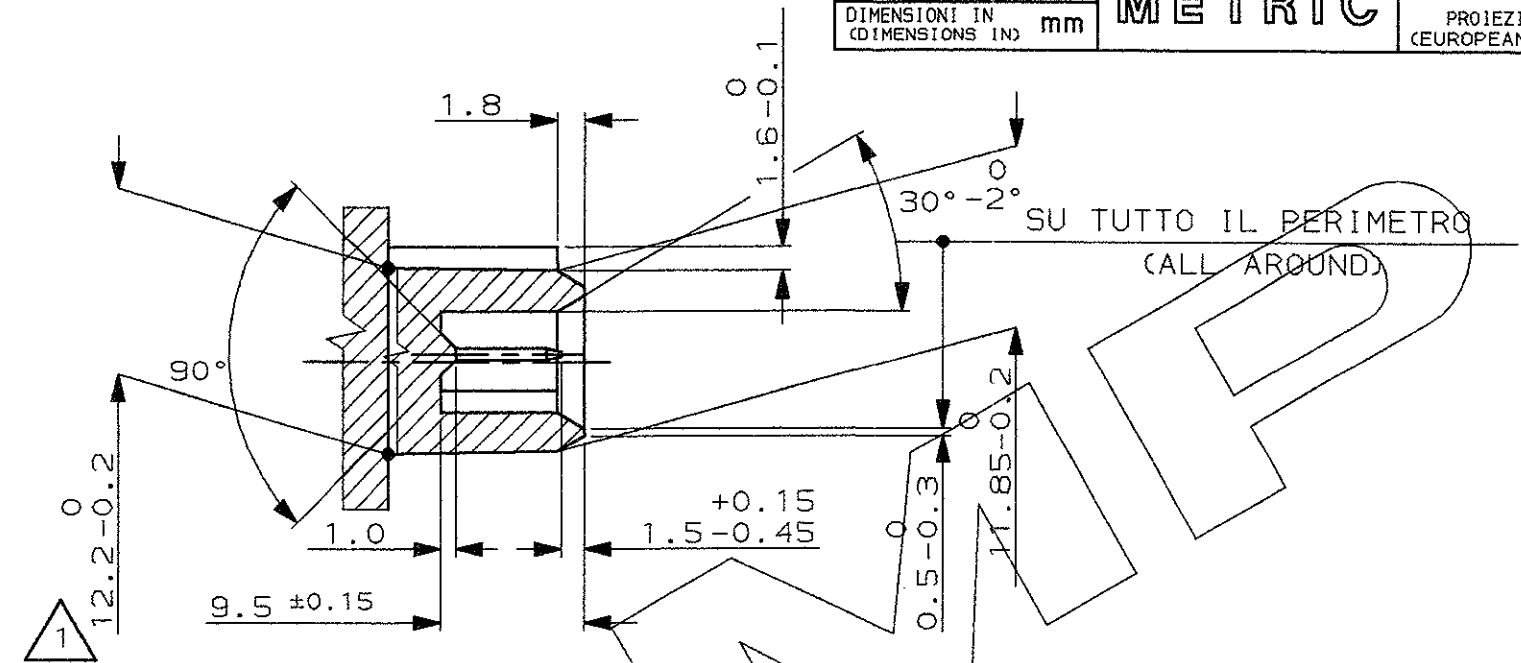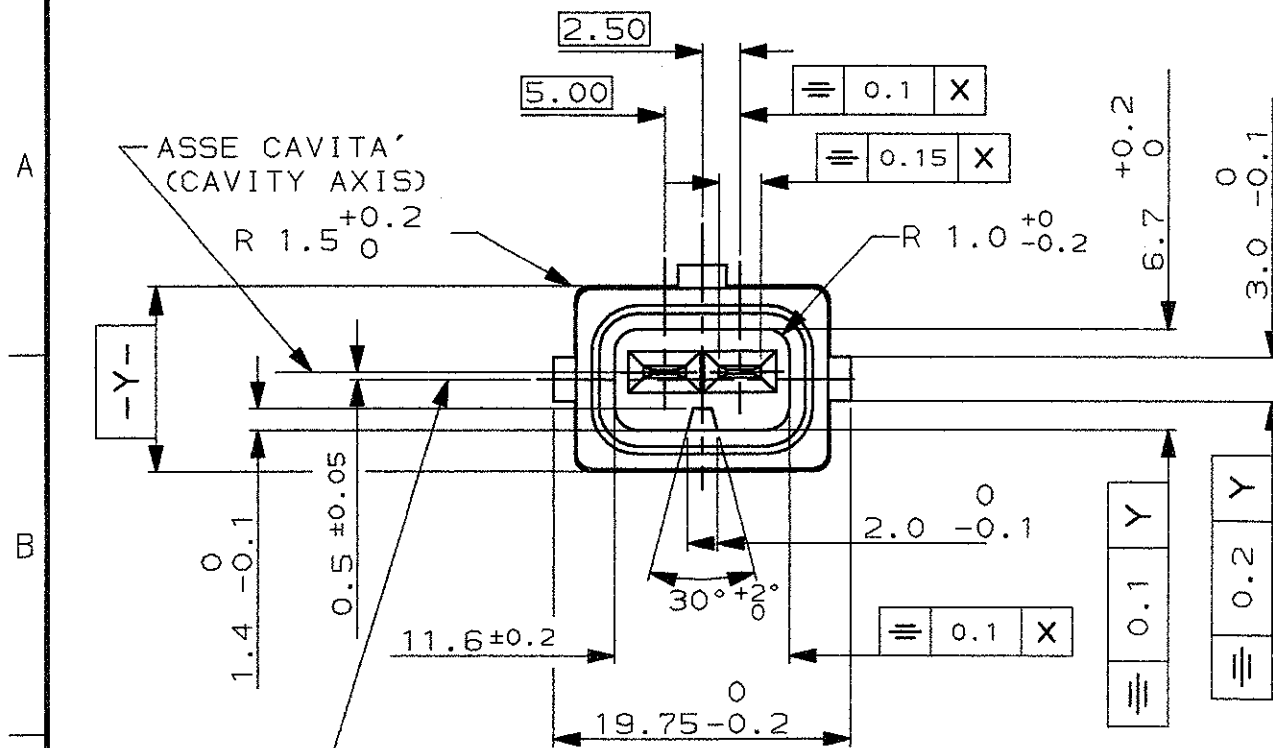

NOTE (NOTES):

- QUOTE APPLICABILI PER SFORMATURA PEZZO (RIGHT DIMENSIONS FOR EXTRACTION ITEM FROM THE MOULD)
- MATERIALE CONTATTI: LEGA DI RAME STAGNATA, ES. OTTONE STAGNATO. (TAB MATERIAL: TINNED CU ALLOY, E.G. TINNED BRASS)
- MATERIALE BLOCCHETTO: TERMOPLASTICO CARICATO FIBRA VETRO. (HOUSING MATERIAL: THERMOPLASTIC GLASS FIBER FILLED).

FINITURA / COLORE (FINISH / COLOUR)		MATERIALE (MATERIAL)		NUMERO (PART NUMBER)	
CUSTOMER DWG. FOR REFERENCE ONLY		DISEGNO PER CLIENTE SOLO PER RIFERIMENTO		19	
THIS DRAWING IS UNPUBLISHED		RELEASE FOR PUBLICATION		19	
© COPYRIGHT 19 BY AMP INCORPORATED, HARRISBURG, PA. ALL INTERNATIONAL RIGHT RESERVED. AMP PRODUCTS MAY BE COVERED BY U.S. AND FOREIGN PATENT AND/OR PATENT PENDING					
TOLLERANZE, SE NON DIVERSAMENTE SPECIFICATO (TOLERANCES, UNLESS OTHERWISE SPECIFIED)		DIAM. ISOLANTE (INS. DIA. RANGE)		RANGO FILO (WIRE RANGE)	
± 0.3		SEE SHEET 1		SEE SHEET 1 ***	
ANGOLI (ANGLES)		± 2°		SCALA (SCALE)	
DIS. (DR.)		DESCRIZIONE (DESCRIPTION)		2 POS. SPLASH PROOF CONN. ASS'Y with SECONDARY LOCK	
CONT. (CHK.)		LOC. SIZE NUMERO (DWG NO)		REV. FOGLIO (SHEET)	
SEE SHEET 1 OF 2		I A3 C-282788		2 OF 2	
REV. (REV. DATE)		DIS. DATA (DR. DATE)		APP. (APP.)	
REVISIONI (REVISION RECORD)		DIS. DATA (DR. DATE)		APP. (APP.)	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[282788-1](#)