

Manual Switches

Electronic Control Rocker Switches

MML24 Series

LED, INCANDESCENT, OR NON-LIGHTED DISPLAY



PWB Mount



Panel Mount



PWB Mount
(Lighted rocker)

FEATURES

- Accepts one or two LEDs or incandescent lamps which are ordered separately
- Printed wiring board mounting or snap-in panel mounting
- Bezels and mounting clips can be furnished installed or ordered separately
- UL recognized, CSA certified

MML24 ORDER GUIDE (Catalog listing for switch, less assembled display options)

MML24K			
A			
3			
AA			
Housing Type	Mounting	Terminals	Circuitry
MML24K Black housing	A No bezel (PWB mounting) K Black bezel, mtg. clip/long sides	3 Printed wiring board 2 Solder	Insert code letters from Circuitry Chart


Electrical Data	page 69
Bezels	page 84
Strip and matrix mounting	page 83
Mounting dimensions	pages 97/98
PWB pin locations	page 97
Rockers are permanently installed.	

CIRCUITRY

Silver Contacts	Gold Contacts	2-Position		3-Position	
AA	BA				
AC	BC				

Example: MML24KA3AA01HDRXX
Electronic control rocker switch with black housing, printed wiring board terminals; 1 pole, silver contacts; 2-position, maintained action; one circuit ON in each position; black rocker, red lens for LED display in Side 1 and no lens in Side 2.

The "MICRO SWITCH" identification is shown on this side of the switch housings.

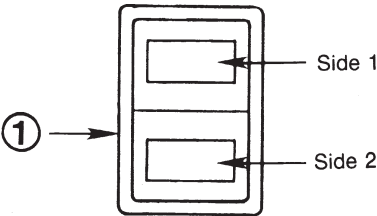

OPERATING ACTION

2-Position	01	Maint.	None	Maint.
	02	Mom.	None	Maint.
	03	Maint.	None	Mom.
3-Position	04	Maint.	Maint.	Maint.
	05	Mom.	Maint.	Mom.
	07	Mom.	Maint.	Maint.

Order display options assembled to switch by adding codes below.

01		H		DRXX				Leave blank, if legend not desired	
Action		Rocker		Lens				Legend	
Insert code numbers from Operating Action Chart		K Black rocker, non-lighted H Black rocker, one lens* F White rocker, one lens*		Side 1		Side 2		20 With legend	
				XX None		XX None		Use legend order sheet FO-74193 to cover each catalog listing (see page 82).	
				LED display: DR Red DY Yellow DG Green		Incand. display: LR Red LY Yellow LG Green LW White			
		* Lighted switches with solder terminals require MML93R receptacle to install lamps or LEDs. See page 88.							

CUSTOMER INSTALLATION:

LED

1. Order LED and receptacle, page 85.

2. Installation instructions, pages 86/88.

Incandescent Lamp

1. Order lamp/PWB receptacle or lamp/solder receptacle, page 87.

2. Installation instructions, page 88.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Honeywell:

[MML24KA3BA04K-TTC](#) [MML24KA3BC01MDGDY](#) [MML24KA3BA01HDRXX](#) [MML24KK2AA04MDRDG](#)
[MML24KA3BA04MDRDR](#) [MML24KA3AC01K](#)