


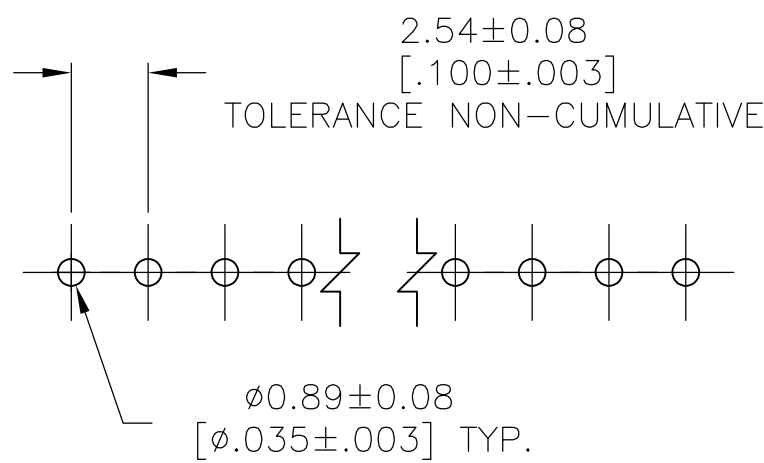

RECOMMENDED HOLE LAYOUT

1. ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS
2. TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADER IS HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD
3. THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING
4. HOUSING: FLAME RETARDANT THERMOPLASTIC; COLOR: BLACK.
CONTACT: COPPER ALLOY
5. FINISH: 0.00254-0.00508 [.000100-.000200] MATTE TIN-LEAD
OVER 0.00127 [.000050] NICKEL ENTIRE POST.
6. FINISH: 0.00254-0.00508 [.000100-.000200] MATTE TIN
OVER 0.00127 [.000050] NICKEL ENTIRE POST.

△ ₆	98.65 [3.884]	96.52 [3.800]	39	40	9-146461-0
△ ₆	101.19 [3.984]	99.06 [3.900]	38	39	8-146461-9
△ ₆	96.11 [3.784]	93.98 [3.700]	37	38	8-146461-8
△ ₆	93.57 [3.684]	91.44 [3.600]	36	37	8-146461-7
△ ₆	91.03 [3.584]	88.90 [3.500]	35	36	8-146461-6
△ ₆	88.49 [3.484]	86.36 [3.400]	34	35	8-146461-5
△ ₆	85.95 [3.384]	83.82 [3.300]	33	34	8-146461-4
△ ₆	83.41 [3.284]	81.28 [3.200]	32	33	8-146461-3
△ ₆	80.87 [3.184]	78.74 [3.100]	31	32	8-146461-2
△ ₆	78.33 [3.084]	76.20 [3.000]	30	31	8-146461-1
△ ₆	75.79 [2.984]	73.66 [2.900]	29	30	8-146461-0
△ ₆	73.25 [2.884]	71.12 [2.800]	28	29	7-146461-9
△ ₆	70.71 [2.784]	68.58 [2.700]	27	28	7-146461-8
△ ₆	68.17 [2.684]	66.04 [2.600]	26	27	7-146461-7
△ ₆	65.63 [2.584]	63.50 [2.500]	25	26	7-146461-6
△ ₆	63.09 [2.484]	60.96 [2.400]	24	25	7-146461-5
△ ₆	60.55 [2.384]	58.42 [2.300]	23	24	7-146461-4
△ ₆	58.01 [2.284]	55.88 [2.200]	22	23	7-146461-3
△ ₆	55.47 [2.184]	53.34 [2.100]	21	22	7-146461-2
△ ₆	52.93 [2.084]	50.80 [2.000]	20	21	7-146461-1
△ ₆	50.39 [1.984]	48.26 [1.900]	19	20	7-146461-0
△ ₆	47.85 [1.884]	45.72 [1.800]	18	19	6-146461-9
△ ₆	45.31 [1.784]	43.18 [1.700]	17	18	6-146461-8
△ ₆	42.77 [1.684]	40.64 [1.600]	16	17	6-146461-7
△ ₆	40.23 [1.584]	38.10 [1.500]	15	16	6-146461-6
△ ₆	37.69 [1.484]	35.56 [1.400]	14	15	6-146461-5
△ ₆	35.15 [1.384]	33.02 [1.300]	13	14	6-146461-4
△ ₆	32.61 [1.284]	30.48 [1.200]	12	13	6-146461-3
△ ₆	30.07 [1.184]	27.94 [1.100]	11	12	6-146461-2
△ ₆	27.53 [1.084]	25.40 [1.000]	10	11	6-146461-1
△ ₆	24.99 [.984]	22.86 [.900]	9	10	6-146461-0
△ ₆	22.45 [.884]	20.32 [.800]	8	9	5-146461-9
△ ₆	19.91 [.784]	17.78 [.700]	7	8	5-146461-8
△ ₆	17.37 [.684]	15.24 [.600]	6	7	5-146461-7
△ ₆	14.83 [.584]	12.70 [.500]	5	6	5-146461-6
△ ₆	12.29 [.484]	10.16 [.400]	4	5	5-146461-5
△ ₆	9.75 [.384]	7.62 [.300]	3	4	5-146461-4
△ ₆	7.21 [.284]	5.08 [.200]	2	3	5-146461-3
△ ₆	4.67 [.184]	2.54 [.100]	1	2	5-146461-2
△ ₆	2.13 [.084]	-	-	1	5-146461-1
PLATING	G	F	E	NO. OF POSITIONS	PART NUMBER

5	98.65 [3.884]	96.52 [3.800]	39	40	4-146461-0
5	101.19 [3.984]	99.06 [3.900]	38	39	3-146461-9
5	96.11 [3.784]	93.98 [3.700]	37	38	3-146461-8
5	93.57 [3.684]	91.44 [3.600]	36	37	3-146461-7
5	91.03 [3.584]	88.90 [3.500]	35	36	3-146461-6
5	88.49 [3.484]	86.36 [3.400]	34	35	3-146461-5
5	85.95 [3.384]	83.82 [3.300]	33	34	3-146461-4
5	83.41 [3.284]	81.28 [3.200]	32	33	3-146461-3
5	80.87 [3.184]	78.74 [3.100]	31	32	3-146461-2
5	78.33 [3.084]	76.20 [3.000]	30	31	3-146461-1
5	75.79 [2.984]	73.66 [2.900]	29	30	3-146461-0
5	73.25 [2.884]	71.12 [2.800]	28	29	2-146461-9
5	70.71 [2.784]	68.58 [2.700]	27	28	2-146461-8
5	68.17 [2.684]	66.04 [2.600]	26	27	2-146461-7
5	65.63 [2.584]	63.50 [2.500]	25	26	2-146461-6
5	63.09 [2.484]	60.96 [2.400]	24	25	2-146461-5
5	60.55 [2.384]	58.42 [2.300]	23	24	2-146461-4
5	58.01 [2.284]	55.88 [2.200]	22	23	2-146461-3
5	55.47 [2.184]	53.34 [2.100]	21	22	2-146461-2
5	52.93 [2.084]	50.80 [2.000]	20	21	2-146461-1
5	50.39 [1.984]	48.26 [1.900]	19	20	2-146461-0
5	47.85 [1.884]	45.72 [1.800]	18	19	1-146461-9
5	45.31 [1.784]	43.18 [1.700]	17	18	1-146461-8
5	42.77 [1.684]	40.64 [1.600]	16	17	1-146461-7
5	40.23 [1.584]	38.10 [1.500]	15	16	1-146461-6
5	37.69 [1.484]	35.56 [1.400]	14	15	1-146461-5
5	35.15 [1.384]	33.02 [1.300]	13	14	1-146461-4
5	32.61 [1.284]	30.48 [1.200]	12	13	1-146461-3
5	30.07 [1.184]	27.94 [1.100]	11	12	1-146461-2
5	27.53 [1.084]	25.40 [1.000]	10	11	1-146461-1
5	24.99 [.984]	22.86 [.900]	9	10	1-146461-0
5	22.45 [.884]	20.32 [.800]	8	9	146461-9
5	19.91 [.784]	17.78 [.700]	7	8	146461-8
5	17.37 [.684]	15.24 [.600]	6	7	146461-7
5	14.83 [.584]	12.70 [.500]	5	6	146461-6
5	12.29 [.484]	10.16 [.400]	4	5	146461-5
5	9.75 [.384]	7.62 [.300]	3	4	146461-4
5	7.21 [.284]	5.08 [.200]	2	3	146461-3
5	4.67 [.184]	2.54 [.100]	1	2	146461-2
5	2.13 [.084]	-	-	1	146461-1
PLATING	G	F	E	NO. OF POSITIONS	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWG. NO.	1/17/96		 TE Connectivity	
		CHKD.	3/16/96			
DIMENSIONS: mm. (INCHES)		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME		
		0 P.L.C. ± 1 P.L.C. ± 2 P.L.C. ± 0.51[.02] 3 P.L.C. ± 0.127[.005] 4 P.L.C. ± 0.254[.010] ANGLES ± 0.52[.02] (2009)		G. DUBNICZKI G. DUBNICZKI 3/16/96		
		PRODUCT SPEC		HEADER ASSEMBLY, MOD II, STACKING, SINGLE ROW, .025 SUB.POST, UNSHROUDED		
MATERIAL		APPLICATION SPEC		SIZE CAGE CODE DRAWING NO.		
		WEIGHT —		A1 00779 C 146461		
SEE TABLE		CUSTOMER DRAWING		RESTRICTED TO —		
				SCALE 4:1 SHEET 1 OF 1 REV B		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[8-146461-7](#)