

M3 x 0.5 - 6g Thread
4.0mm Hexagonal Head

Electrical Details

Electrical Configuration	C Filter
Capacitance Measurement	@ 1000hr Point
Current Rating	10A
Insulation Resistance (IR)	10GΩ or 1000ΩF
Temperature Rating	-55°C to +125°C
Ferrite Inductance (Typical)	Not Applicable



Mechanical Details

Head (A/F)	4.0mm (0.157")
Nut A/F	4.0mm (0.187")
Washer diameter	6.9mm (0.272")
Mounting Torque	0.25Nm (2.21lbf in) max. if using nut 0.15Nm (1.32lbf in) max. into tapped hole
Mounting Hole Diameter	3.15mm ±0.1 (0.124" ±0.004")
Max. Panel Thickness	3.2mm (0.126")
Weight (Typical)	0.5g (0.017oz)
Finish	Silver plate on copper undercoat



Product Code	Capacitance (±20%) UOS	Dielectric	Rated Voltage (Vdc)	DWV (Vdc)	Typical No-Load Insertion Loss (dB)								
					0.01MHz	0.1MHz	1MHz	10MHz	100MHz	1GHz			
*SFAJCS000100ZC	10pF -20% / +80%	COG/NPO	500#	750	-	-	-	-	-	4			
SFAJCS000150ZC	15pF -20% / +80%				-	-	-	-	-	7			
SFAJCS000220ZC	22pF -20% / +80%				-	-	-	-	-	10			
SFAJCS000330ZC	33pF -20% / +80%				-	-	-	-	-	12			
*SFAJCS000470ZC	47pF -20% / +80%				-	-	-	-	1	15			
*SFAJCS000680MC	68pF				-	-	-	-	2	18			
*SFAJCS000101MC	100pF				-	-	-	-	4	22			
SFAJCS000151MC	150pF				-	-	-	-	7	25			
*SFAJCS000221MC	220pF				-	-	-	-	10	29			
*SFAJCS000331MC	330pF				-	-	-	-	13	33			
*SFAJCS000471MX	470pF	†X7R			-	-	-	1	16	35			
SFAJCS000681MX	680pF	X7R			-	-	-	2	19	36			
*SFAJCS000102MX	1.0nF				-	-	-	4	23	41			
SFAJCS000152MX	1.5nF				-	-	-	7	26	45			
*SFAJCS000222MX	2.2nF				-	-	-	10	30	50			
SFAJCS000332MX	3.3nF				-	-	-	13	33	52			
*SFAJCS000472MX	4.7nF				-	-	1	16	36	55			
*SFAJCS000682MX	6.8nF				-	-	2	19	39	57			
*SFAJCS000103MX	10nF				-	-	4	22	41	60			
*SFAJCS000153MX	15nF				-	-	7	25	44	62			
*SFAJCS000223MX	22nF				-	-	10	29	46	65			
SFAJCS000333MX	33nF				-	-	13	33	48	68			
*SFAJCS000473MX	47nF					200	500	-	1	16	35	50	70
SFAJCS000683MX	68nF					-	2	19	39	54	>70		
*SFAJCS000104MX	100nF					100	250	-	4	22	41	57	>70
*SFAJCS000154MX	150nF					50	125	-	7	25	45	60	>70

Also rated for operation at 115Vac 400Hz. Self heating will occur - evaluation in situ recommended. * Recommended values. † Also available in COG/NPO.

Ordering Information - SFAJC range

SF	A	J	C	050	0154	M	X	0
Type	Case style	Thread	Electrical configuration	Voltage (dc)	Capacitance in picofarads (pF)	Tolerance	Dielectric	Hardware
Syfer Filter	4.0mm Hex Head	M3	C = C Filter	050 = 50V 100 = 100V 200 = 200V 500 = 500V	First digit is 0. Second and third digits are significant figures of capacitance code. The fourth digit is number of zeros following Example: 0101 = 100pF 0332 = 3300pF	M = ±20% Z = -20+80%	C = COG/NPO X = X7R	0 = Without 1 = With

Note: The addition of a 4-digit numerical suffix code can be used to denote changes to the standard part.
Options include for example: change of finish / alternative voltage rating / non-standard intermediate capacitance values / test requirements. Please refer specific requests to the factory.

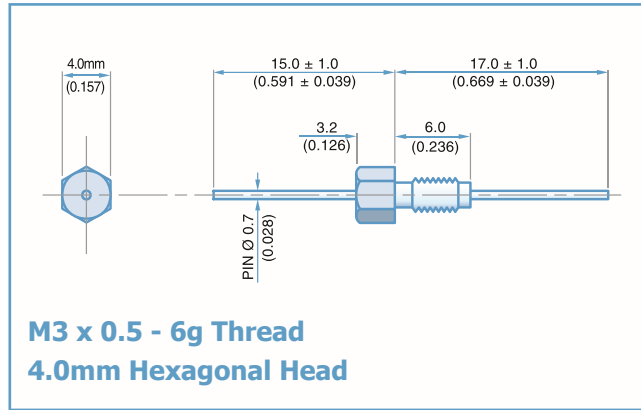

Electrical Details

Electrical Configuration	L-C Filter
Capacitance Measurement	@ 1000hr Point
Current Rating	10A
Insulation Resistance (IR)	10GΩ or 1000ΩF
Temperature Rating	-55°C to +125°C
Ferrite Inductance (Typical)	50nH



Mechanical Details

Head (A/F)	4.0mm (0.157")
Nut A/F	4.0mm (0.157")
Washer diameter	6.9mm (0.272")
Mounting Torque	0.25Nm (2.21lbf in) max. if using nut 0.15Nm (1.32lbf in) max. into tapped hole
Mounting Hole Diameter	3.15mm ±0.1 (0.124" ±0.004")
Max. Panel Thickness	3.2mm (0.126")
Weight (Typical)	0.5g (0.017oz)
Finish	Silver plate on copper undercoat

Product Code	Capacitance (±20%) UOS	Dielectric	Rated Voltage (Vdc)	DWV (Vdc)	Typical No-Load Insertion Loss (dB)					
					0.01MHz	0.1MHz	1MHz	10MHz	100MHz	1GHz
*SFAJL5000100ZC	10pF -20% / +80%	COG/NP0	500#	750	-	-	-	-	-	6
SFAJL5000150ZC	15pF -20% / +80%				-	-	-	-	-	9
SFAJL5000220ZC	22pF -20% / +80%				-	-	-	-	-	12
SFAJL5000330ZC	33pF -20% / +80%				-	-	-	-	1	15
*SFAJL5000470ZC	47pF -20% / +80%				-	-	-	-	2	19
*SFAJL5000680MC	68pF				-	-	-	-	4	20
*SFAJL5000101MC	100pF				-	-	-	-	7	24
SFAJL5000151MC	150pF				-	-	-	-	10	27
*SFAJL5000221MC	220pF				-	-	-	-	12	30
*SFAJL5000331MC	330pF				-	-	-	1	16	34
*SFAJL5000471MX	470pF	†X7R			-	-	-	2	19	38
SFAJL5000681MX	680pF				-	-	-	3	22	41
*SFAJL5000102MX	1.0nF	X7R			-	-	-	6	25	44
SFAJL5000152MX	1.5nF				-	-	-	9	29	48
*SFAJL5000222MX	2.2nF				-	-	-	12	31	51
SFAJL5000332MX	3.3nF				-	-	-	15	35	54
*SFAJL5000472MX	4.7nF				-	-	1	18	39	57
SFAJL5000682MX	6.8nF				-	-	2	21	41	60
*SFAJL5000103MX	10nF				-	-	4	23	43	63
*SFAJL5000153MX	15nF				-	-	7	27	46	66
*SFAJL5000223MX	22nF				-	-	10	30	48	68
SFAJL5000333MX	33nF				-	-	13	34	50	70
*SFAJL2000473MX	47nF		200	500	-	1	17	37	51	>70
SFAJL2000683MX	68nF		-	2	20	40	55	>70		
*SFAJL1000104MX	100nF		100	250	-	4	22	44	60	>70
*SFAJL0500154MX	150nF		50	125	-	7	25	47	62	>70

Also rated for operation at 115Vac 400Hz. Self heating will occur - evaluation in situ recommended. * Recommended values. † Also available in COG/NP0.

Ordering Information - SFAJL range

SF	A	J	L	200	0683	M	X	1
Type	Case style	Thread	Electrical configuration	Voltage (dc)	Capacitance in picofarads (pF)	Tolerance	Dielectric	Hardware
Syfer Filter	4.0mm Hex Head	M3	L = L-C Filter	050 = 50V 100 = 100V 200 = 200V 500 = 500V	First digit is 0. Second and third digits are significant figures of capacitance code. The fourth digit is number of zeros following Example: 0101 = 100pF 0332 = 3300pF	M = ±20% Z = -20+80%	C = COG/NP0 X = X7R	0 = Without 1 = With

Note: The addition of a 4-digit numerical suffix code can be used to denote changes to the standard part.
Options include for example: change of finish / alternative voltage rating / non-standard intermediate capacitance values / test requirements. Please refer specific requests to the factory.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Knowles:

<u>SFAJL1000223MX1</u>	<u>SFAJL5000682MX1</u>	<u>SFAJC5000101MC1</u>	<u>SFAJC5000472MX1</u>	<u>SFAJC0500473MX1</u>
<u>SFAJC5000682MX1</u>	<u>SFAJC5000221MC1</u>	<u>SFAJC0500154MX1</u>	<u>SFAJC1000104MX1</u>	<u>SFAJC2000683MX1</u>
<u>SFAJC5000100ZC1</u>	<u>SFAJL0500154MX1</u>	<u>SFAJL1000104MX1</u>	<u>SFAJL2000473MX1</u>	<u>SFAJL5000333MX1</u>
<u>SFAJL5000681MX1</u>	<u>SFAJC5000330ZC1</u>	<u>SFAJC5000102MX1</u>	<u>SFAJC2000103MX1</u>	<u>SFAJC2000153MX1</u>
<u>SFAJL5000101MC1</u>	<u>SFAJL5000102MX1</u>	<u>SFAJL0500473MX1</u>	<u>SFAJL0500333MX1</u>	<u>SFAJC5000331MC1</u>
<u>SFAJC5000101MC0</u>	<u>SFAJC5000152MX1</u>	<u>SFAJL5000150ZC0</u>	<u>SFAJC5000680MC0</u>	<u>SFAJL5000150ZC1</u>
<u>SFAJL2000103MX1</u>	<u>SFAJL5000470ZC0</u>	<u>SFAJC5000330ZC0</u>	<u>SFAJC5000471MX0</u>	<u>SFAJC0500333MX1</u>
<u>SFAJC5000331MC0</u>	<u>SFAJL1000223MX0</u>	<u>SFAJL5000102MX0</u>	<u>SFAJL2000153MX0</u>	<u>SFAJC0500333MX0</u>
<u>SFAJC5000100ZC0</u>	<u>SFAJC5000680MC1</u>	<u>SFAJL5000221MC0</u>	<u>SFAJL5000151MC1</u>	<u>SFAJL2000153MX1</u>
<u>SFAJC5000682MX0</u>	<u>SFAJL5000331MC1</u>	<u>SFAJL5000152MX1</u>	<u>SFAJL5000471MX0</u>	<u>SFAJL5000470ZC1</u>
<u>SFAJC5000221MC0</u>	<u>SFAJC1000223MX0</u>	<u>SFAJL5000681MX0</u>	<u>SFAJC5000332MX1</u>	<u>SFAJL5000472MX1</u>
<u>SFAJC5000150ZC0</u>	<u>SFAJL5000332MX1</u>	<u>SFAJC5000471MX1</u>	<u>SFAJL5000152MX0</u>	<u>SFAJC5000472MX0</u>
<u>SFAJL5000151MC0</u>	<u>SFAJC5000222MX1</u>	<u>SFAJL5000332MX0</u>	<u>SFAJL5000220ZC0</u>	<u>SFAJC5000220ZC0</u>
<u>SFAJL5000471MX1</u>	<u>SFAJL5000222MX1</u>	<u>SFAJC5000150ZC1</u>	<u>SFAJC5000470ZC1</u>	<u>SFAJL5000101MC0</u>
<u>SFAJC2000153MX0</u>	<u>SFAJC0500473MX0</u>	<u>SFAJL5000100ZC1</u>	<u>SFAJC5000681MX0</u>	<u>SFAJC5000681MX1</u>
<u>SFAJC5000151MC0</u>	<u>SFAJC1000223MX1</u>	<u>SFAJL0500473MX0</u>	<u>SFAJL5000100ZC0</u>	<u>SFAJC5000222MX0</u>
<u>SFAJL0500333MX0</u>	<u>SFAJL5000221MC1</u>	<u>SFAJC5000470ZC0</u>	<u>SFAJL5000222MX0</u>	<u>SFAJL5000682MX0</u>
<u>SFAJC5000152MX0</u>	<u>SFAJL5000330ZC0</u>	<u>SFAJL5000680MC1</u>	<u>SFAJC5000220ZC1</u>	<u>SFAJC2000103MX0</u>
<u>SFAJL5000331MC0</u>	<u>SFAJL5000680MC0</u>	<u>SFAJL5000330ZC1</u>	<u>SFAJC5000151MC1</u>	<u>SFAJL5000472MX0</u>
<u>SFAJL2000103MX0</u>	<u>SFAJL5000220ZC1</u>	<u>SFAJC5000332MX0</u>	<u>SFAJC5000102MX0</u>	