
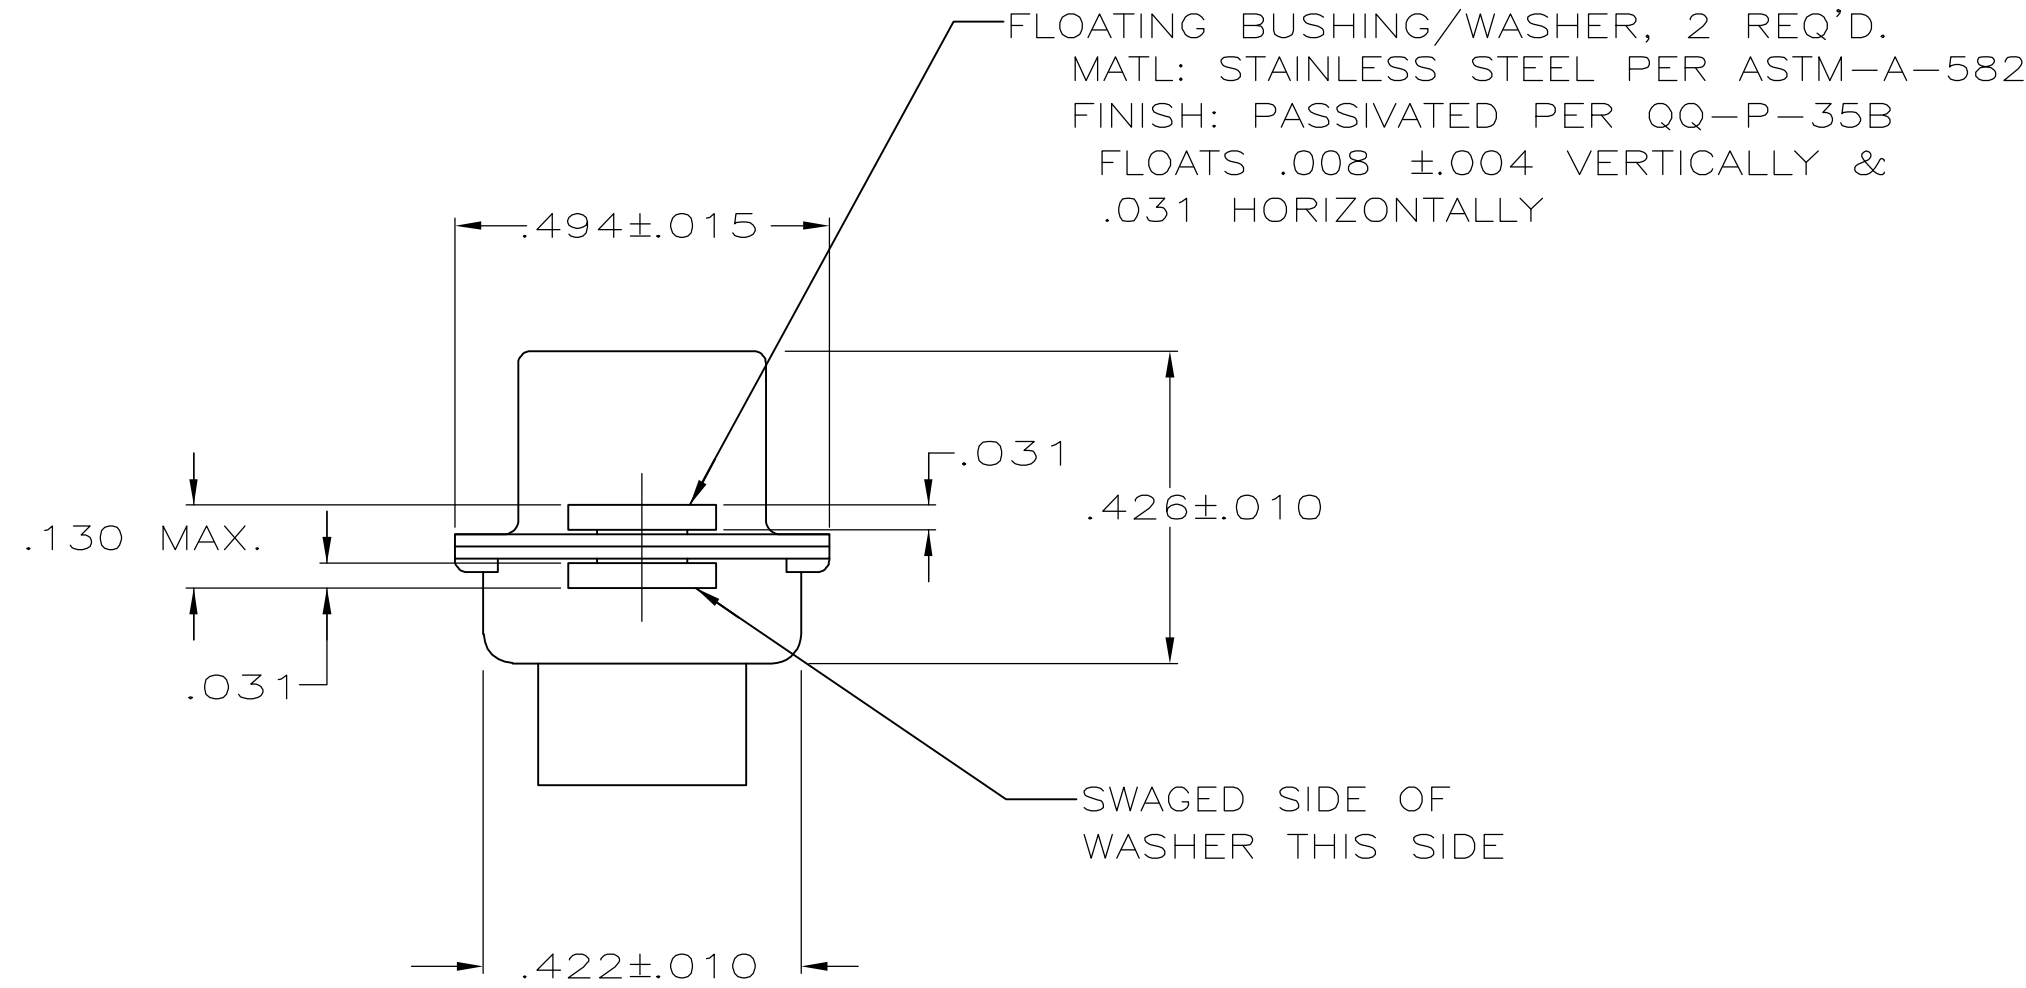
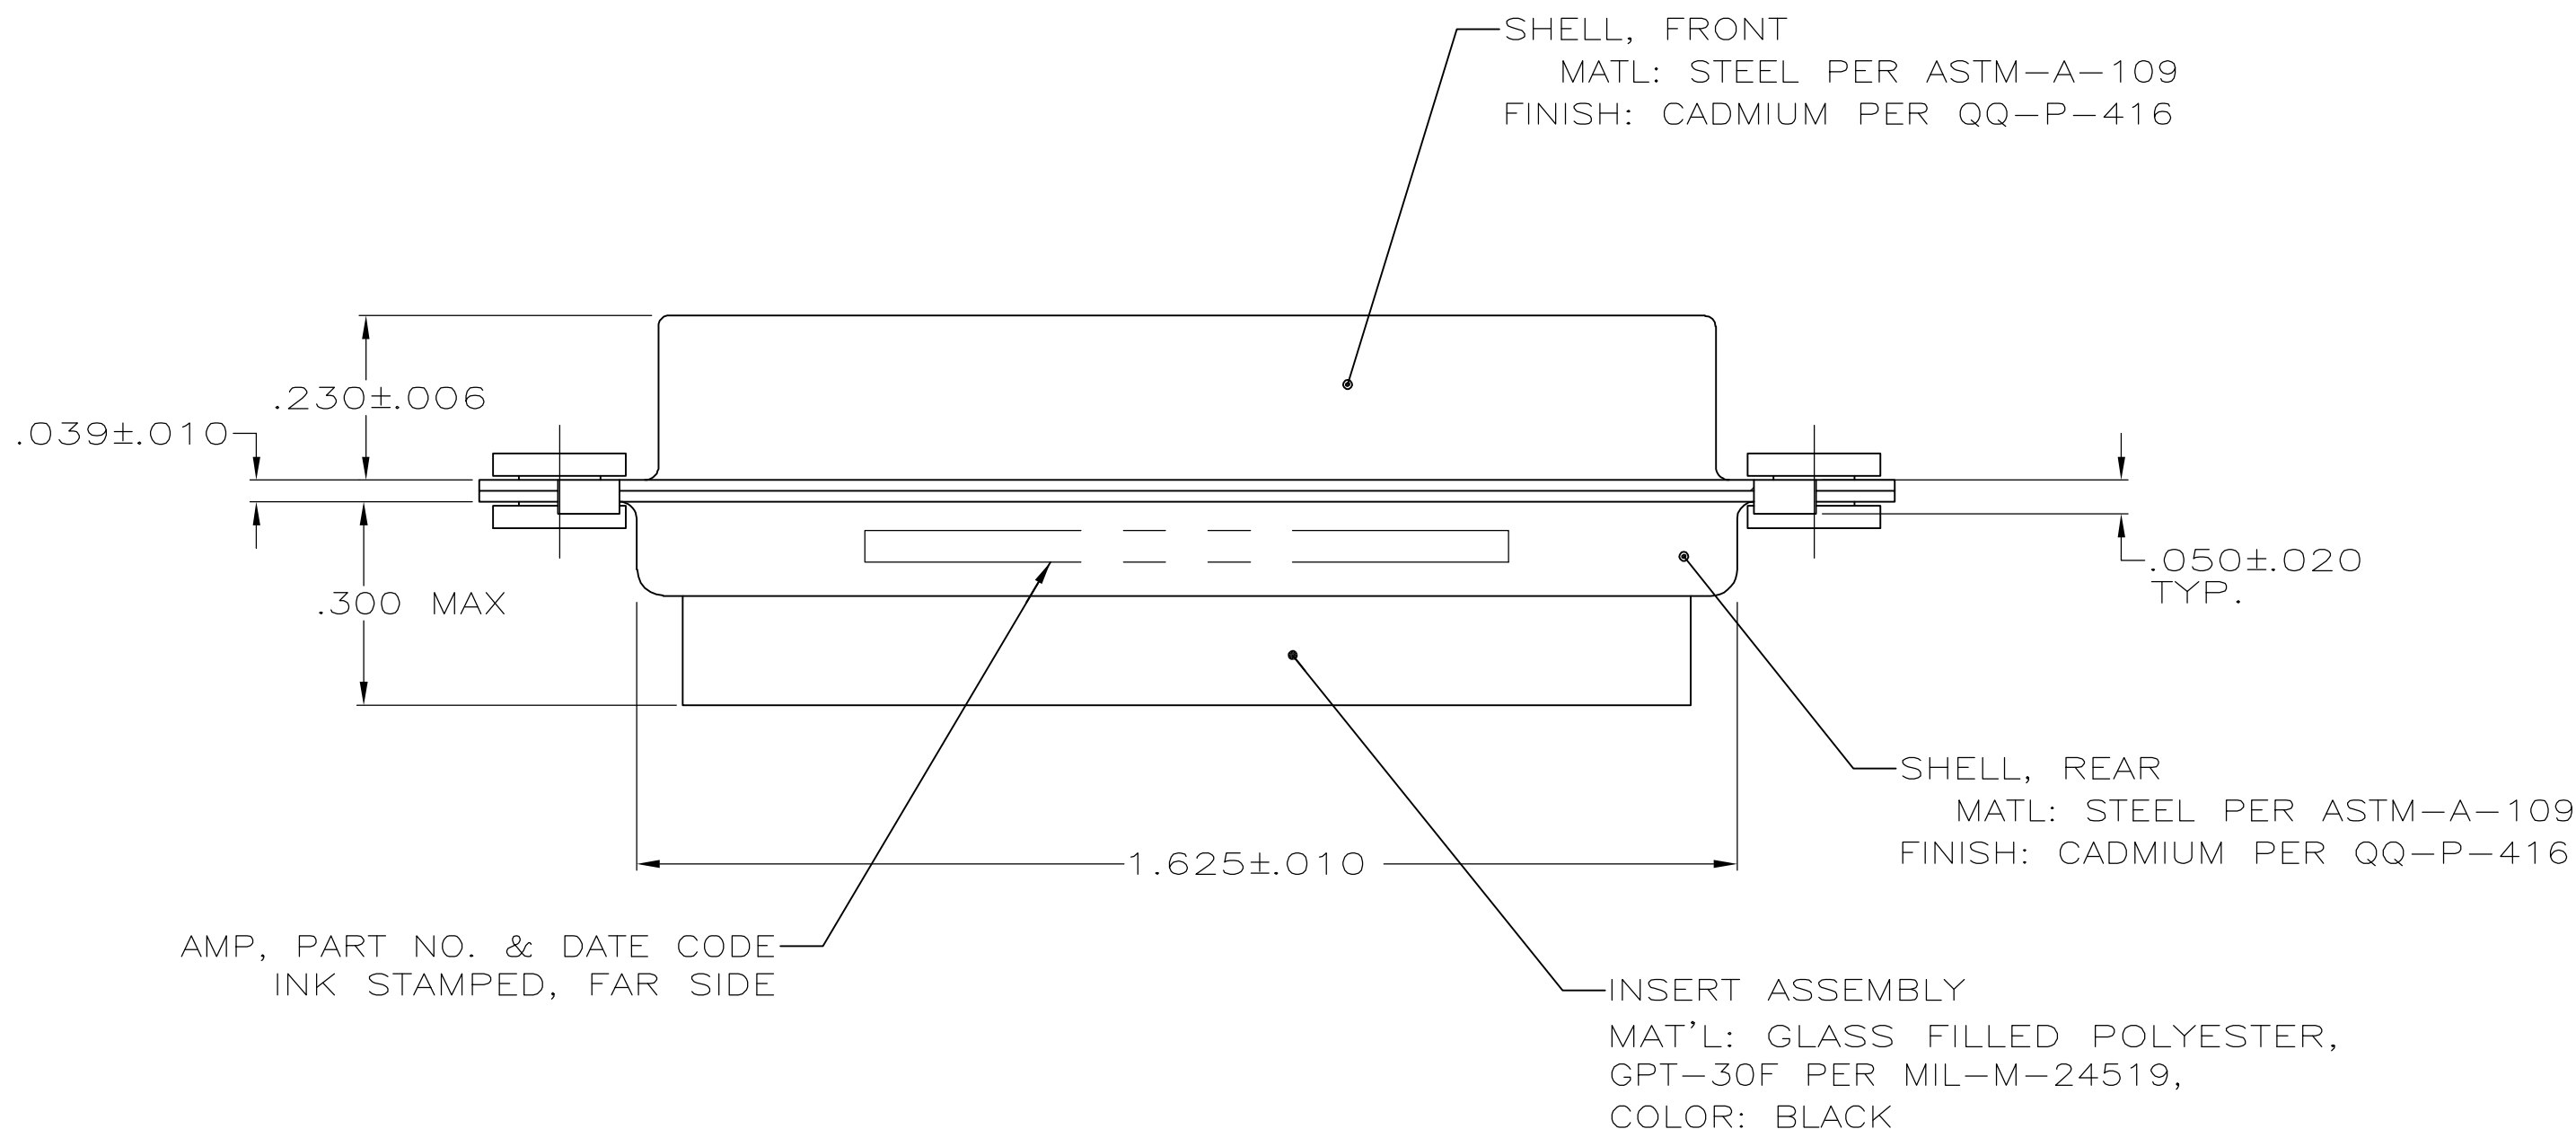


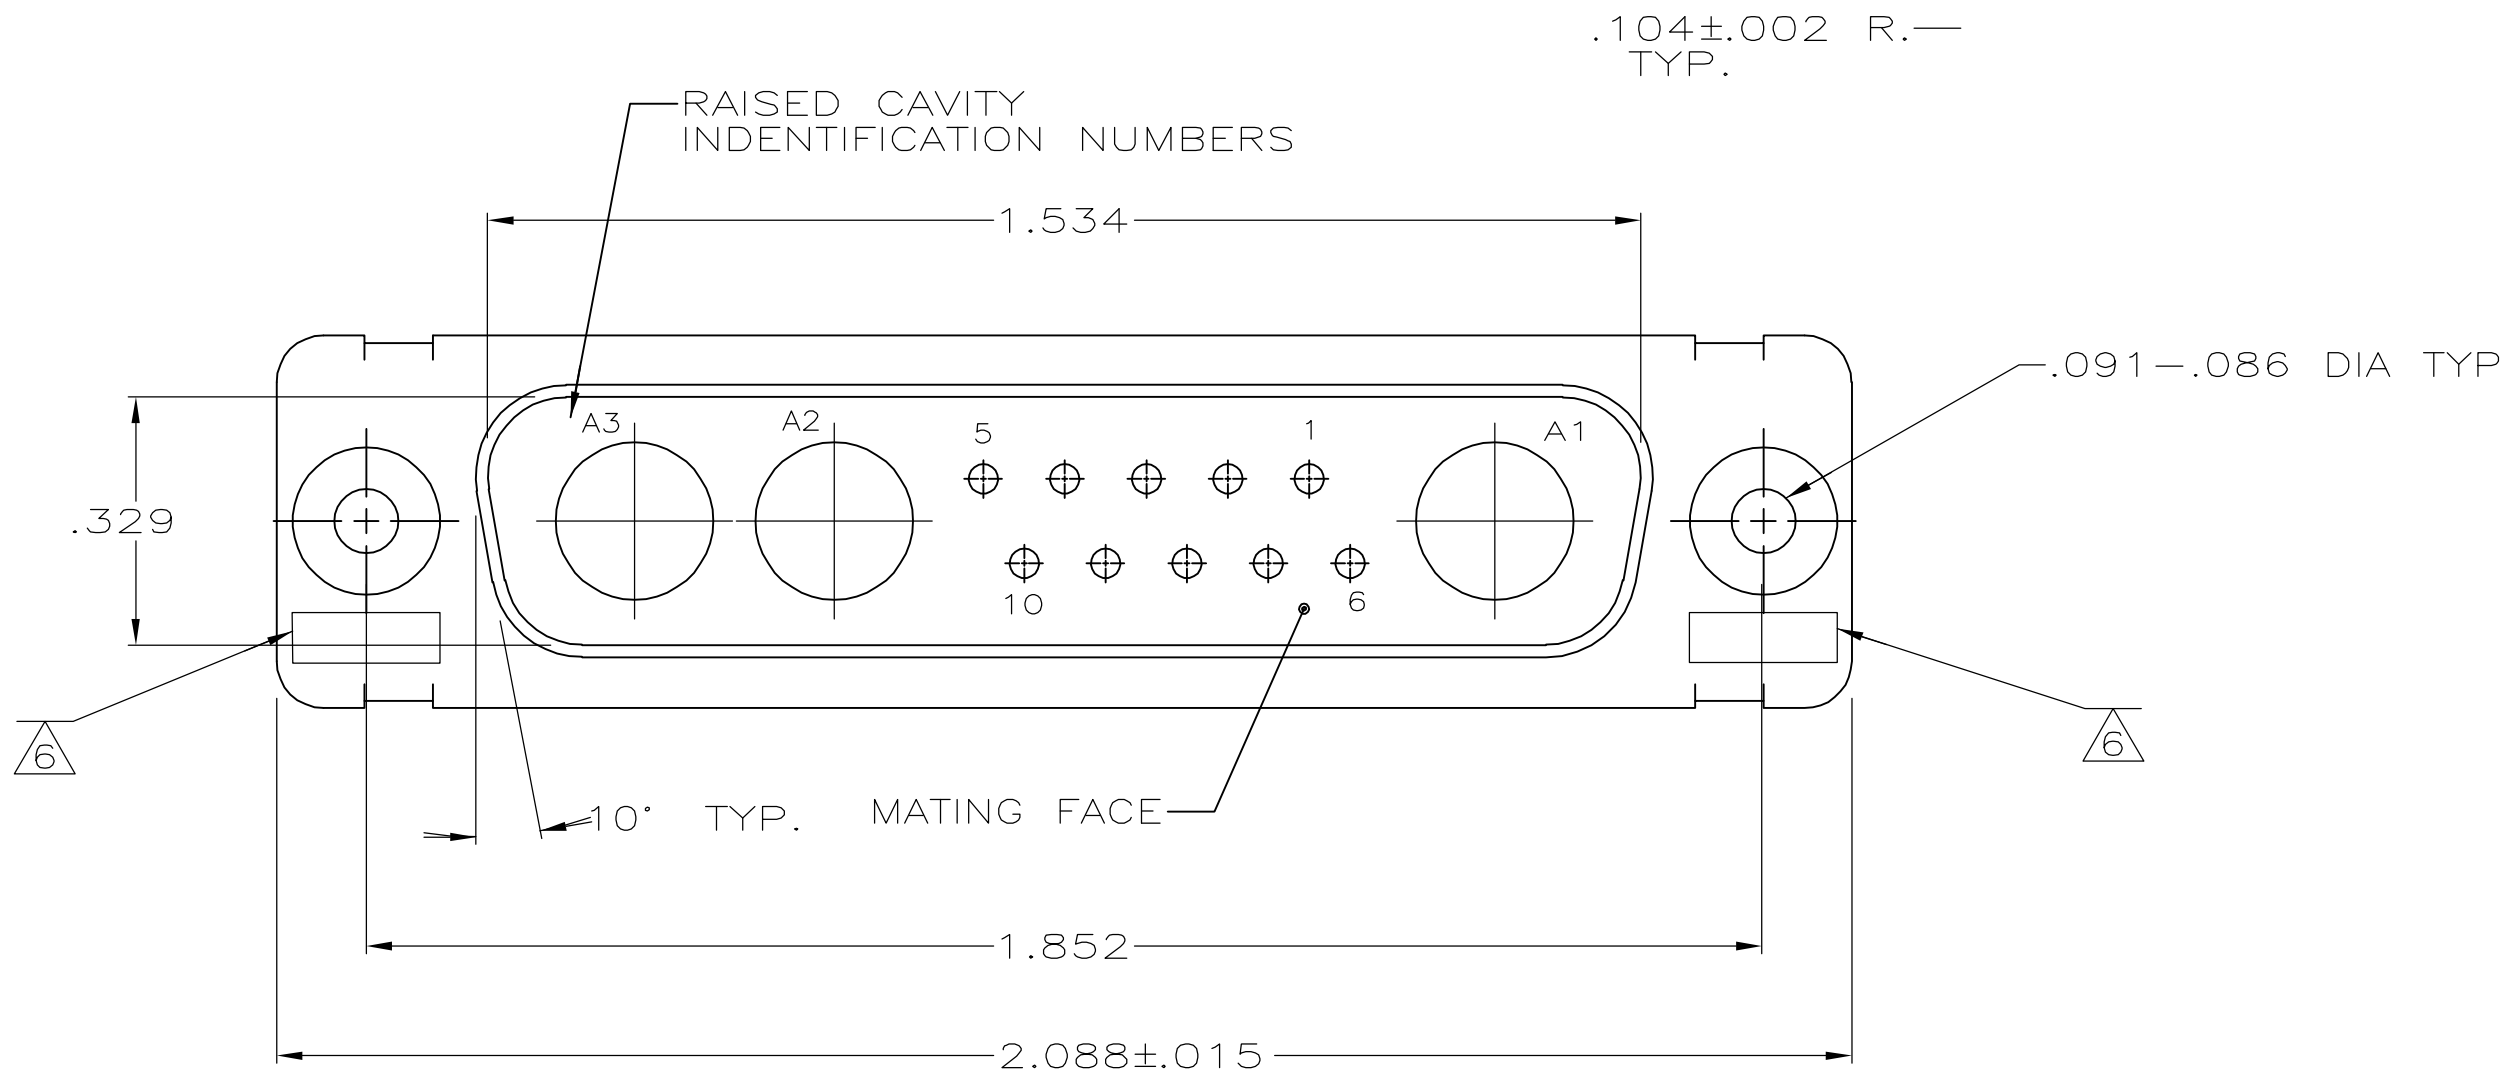

1. THIS PLUG WILL MATE WITH ANY 13C3,SIZE 3 RECEPTACLE IN AMPLIMITE SERIES.
2. MAXIMUM WIRE INSULATION TO BE USED WITH THIS PLUG IS .068 DIA.
3. STAINLESS STEEL RETENTION CLIPS (10) ARE INCLUDED IN INSERT ASSEMBLY.
- 4 CONNECTOR SUPPLIED WITH (11) SIGNAL PIN CONTACTS; PACKAGED IN A SEPERATE BAG.
5. USE 3 SIZE 8 POWER OR COAX PIN CONTACTS. CONSULT PRODUCT ENGINEERING FOR MORE DETAILS
- 6 UL/CSA DESIGNATION STAMPED IN THIS AREA, OPTIONAL.

-	212058-2
4	212058-1
REMARKS	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN C.C.THOMAS CHK A.FMADI	1-27-88 2-3-88	Tyco Electronics Corporation Harrisburg, Pa 17105-3608	
DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD	-	NAME	PLUG ASSY, AMPLIMITE 13C3, SIZE 3, SERIES 109 COAX MIX, FLOAT BUSHINGS
	0 PLC ± -	PRODUCT SPEC	-	SIZE	A1
	1 PLC ± -	APPLICATION SPEC	-	CAGE CODE	00779
MATERIAL SEE CALLOUTS	FINISH SEE CALLOUTS	WEIGHT	-	DRAWING NO	212058
CUSTOMER DRAWING				SCALE	4:1
				SHEET	1 OF 1
				REV	F

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[212058-1](#)