

## Galvanically-isolated 8 channel high-side driver based on the ISO8200B

Data brief



STEVAL-IFP015V2

### Features

- $V_{CC}$  operating voltage from 10.5 to 33 V
- 0.7 A for each channel
- Reverse polarity protection on  $V_{CC}$  and  $V_{DD}$  supply voltage
- Digital supply voltage  $V_{DD}$  3.3/5 V
- Microcontroller interface direct/synchronous mode communication
- Designed to meet requirements of IEC 61000-4-2, IEC 61000-4-4, IEC 61000-4-5 standards
- RoHS compliant

### Description

The STEVAL-IFP015V2 demonstration board works in combination with the STEVAL-

PCC009V2 or STEVAL-PCC009V1 interface board to allow evaluation of all the features of the ISO8200B device. A large GND area on the printed circuit board has been designed to minimize noise effects and ensure good thermal performance.


The ISO8200B is a galvanic isolated 8 channel driver featuring a very low supply current. It contains 2 independent galvanic isolated voltage domains ( $V_{CC}$  for the power stage and  $V_{DD}$  for the digital stage). The IC is intended to drive any type of load with one side connected to ground. Active channel current limitation combined with thermal shutdown, independent for each channel, and automatic restart protect the device against overload. Additional embedded functions are: loss of GND protection which automatically turns off the outputs in case of analog ground, undervoltage shutdown with hysteresis, and reset function for immediate power output shutdown.

Built-in thermal shutdown protects the chip against overtemperature and short-circuit. In overload condition, the channel turns off, then back on automatically after the IC temperature has decreased below a reset threshold. If this condition causes the case temperature to reach the TCR limit, the overloaded channel is turned off and will restart only when case and junction temperature have decreased down to the reset threshold. Non overloaded channels continue to operate normally.

An internal circuit provides an OR-wired non latched common FAULT indicator signaling channel OVT. The FAULT pin is an open-drain active-low fault indication pin.

# 1 Schematic diagram

Figure 1: STEVAL-IFP015V2 circuit schematic

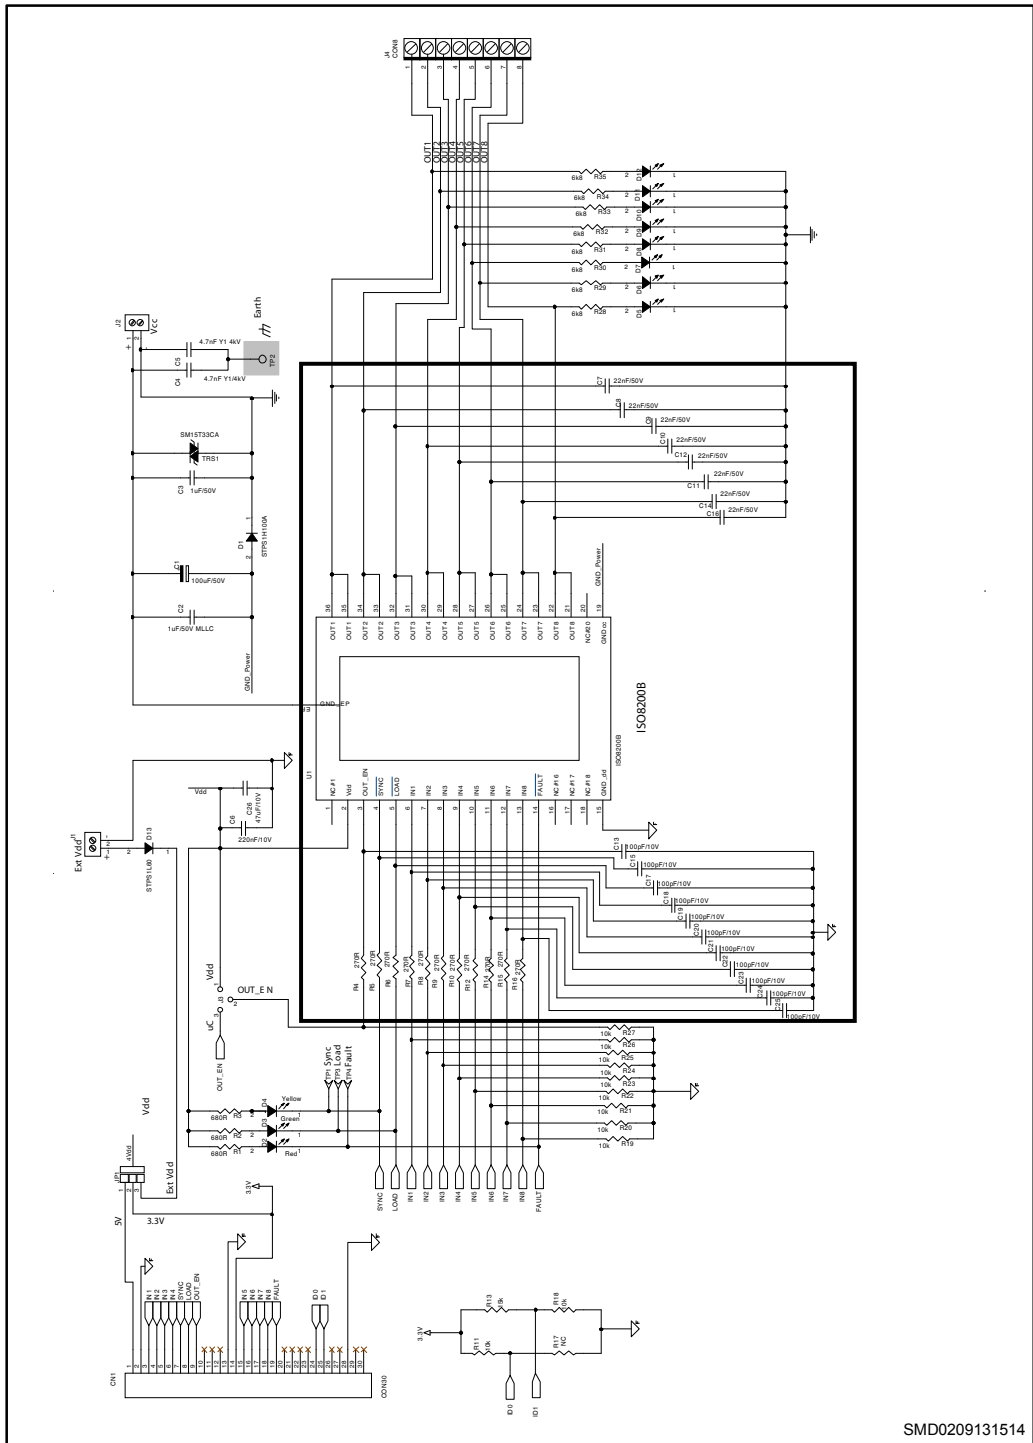

## 2 Revision history

Table 1: Document revision history

Date	Revision	Changes
02-Sep-2013	1	Initial release.

**Please Read Carefully**

Information in this document is provided solely in connection with ST products. STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, modifications or improvements, to this document, and the products and services described herein at any time, without notice.

All ST products are sold pursuant to ST's terms and conditions of sale.

Purchasers are solely responsible for the choice, selection and use of the ST products and services described herein, and ST assumes no liability whatsoever relating to the choice, selection or use of the ST products and services described herein.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted under this document. If any part of this document refers to any third party products or services it shall not be deemed a license grant by ST for the use of such third party products or services, or any intellectual property contained therein or considered as a warranty covering the use in any manner whatsoever of such third party products or services or any intellectual property contained therein.

**UNLESS OTHERWISE SET FORTH IN ST'S TERMS AND CONDITIONS OF SALE ST DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY WITH RESPECT TO THE USE AND/OR SALE OF ST PRODUCTS INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION), OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.**

**ST PRODUCTS ARE NOT AUTHORIZED FOR USE IN WEAPONS. NOR ARE ST PRODUCTS DESIGNED OR AUTHORIZED FOR USE IN: (A) SAFETY CRITICAL APPLICATIONS SUCH AS LIFE SUPPORTING, ACTIVE IMPLANTED DEVICES OR SYSTEMS WITH PRODUCT FUNCTIONAL SAFETY REQUIREMENTS; (B) AERONAUTIC APPLICATIONS; (C) AUTOMOTIVE APPLICATIONS OR ENVIRONMENTS, AND/OR (D) AEROSPACE APPLICATIONS OR ENVIRONMENTS. WHERE ST PRODUCTS ARE NOT DESIGNED FOR SUCH USE, THE PURCHASER SHALL USE PRODUCTS AT PURCHASER'S SOLE RISK, EVEN IF ST HAS BEEN INFORMED IN WRITING OF SUCH USAGE, UNLESS A PRODUCT IS EXPRESSLY DESIGNATED BY ST AS BEING INTENDED FOR "AUTOMOTIVE, AUTOMOTIVE SAFETY OR MEDICAL" INDUSTRY DOMAINS ACCORDING TO ST PRODUCT DESIGN SPECIFICATIONS. PRODUCTS FORMALLY ESCC, QML OR JAN QUALIFIED ARE DEEMED SUITABLE FOR USE IN AEROSPACE BY THE CORRESPONDING GOVERNMENTAL AGENCY.**

Resale of ST products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by ST for the ST product or service described herein and shall not create or extend in any manner whatsoever, any liability of ST.

ST and the ST logo are trademarks or registered trademarks of ST in various countries.

Information in this document supersedes and replaces all information previously supplied.

The ST logo is a registered trademark of STMicroelectronics. All other names are the property of their respective owners.

© 2013 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy  
- Japan - Malaysia - Malta - Morocco - Philippines - Singapore - Spain - Sweden - Switzerland - United Kingdom - United  
States of America

[www.st.com](http://www.st.com)

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[STMicroelectronics:](#)

[STEVAL-IFP015V2](#)