


Item List	P/N	Connector Description	Jumper/Switch	Setting
Controller: ACG-1024	4167202-00	CN2 Panel connector,Hirose DF11-28DP-2DSA	JA1 On board +5V logic supply enable (factory set)	1-3, 2-4 closed
Panel connection kit: Panel cable, 330mm	4263112-00	CN3 Panel connector,Hirose DF11-32DP-2DSA	JA2 On board +3.3V Logic supply enable	1-3, 2-4 closed
		CN4 Panel connector,Hirose DF11-20DP-2DSA	JA3 Panel power voltage select	3-5 & 4-6 closed
		CN8 Serial Control input connector,JST B6B-XH-A	JA5 +12V Panel power select	open
		CNA1 Auxiliary power connector, JST B4B-XH-A	JA6 Input power control	open
Inverter kit: Inverter: INV15-208	5560202-00	CNB1 Backlight inverter connector, JST B5B-XH-A	JB2 Backlight inverter On/Off control - signal level	2-3 closed
	Inverter cable,300mm	4260518-01	JB3 Backlight inverter On/Off control - polarity level	1-2 closed
OSD kit: OSD switch mount (VR type)	4106805-50	CNC1 OSD control connector, JST B12B-XH-A	JP15 Panel selection	1-2 & 3-4 closed
	OSD cable, 150mm	4206802-60		
Others	VGA cable 1.8m	4200003-11		
	Switch power supply, 12V 4A	5000007-00		
		GND1 Ground blade		
		LED1 Dual colour LED connector, header pin 3x1		
		P1 VGA in, DB 15 way DDC version		
		PP1 Main power in, 2.5mm DC jack		

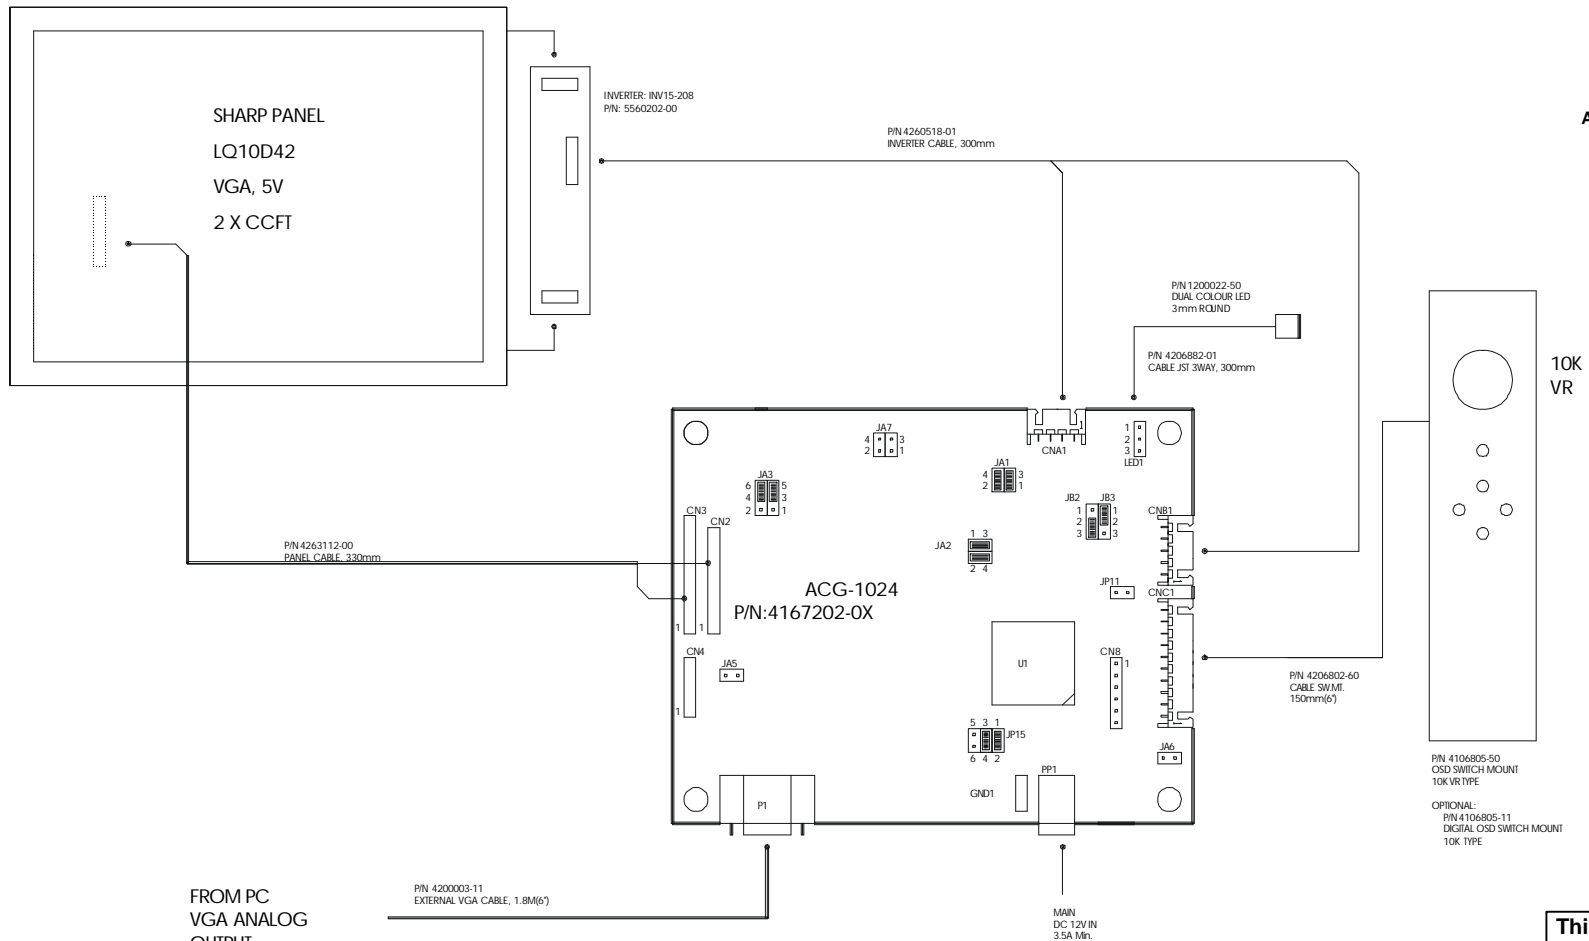

**READ DOCUMENTS FOR  
PROPER JB2 & JB3 SETTINGS  
AND PROPER INVERTER CABLE  
IF USING OTHER INVERTER**

PIN 4106805-50  
OSD SWITCH MOUNT  
10K VR TYPE  
OPTIONAL:  
PIN 4106805-11  
DIGITAL OSD SWITCH MOUNT  
10K TYPE

**This Connection diagram is also  
applicable to controller  
p/n:4167202-0X,  
where X=0**

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Digital View:](#)

[426311200-3](#)