

Series F Ferrite Filtered Connectors


The Series F filtered D-subminiature connectors incorporate a solid slab of ferrite material as the filtering element. This rugged one-piece design provides a com-pact connector that is a drop-in replacement for standard connectors. The ferrite material has been chosen for optimum filtering performance in the 10 to 300 MHz range.

Series F Applications

- Personal computers, microcomputer-applied products and peripheral/terminal equipment
- Eliminates common-mode noise along data lines in data communication terminals and digital equipment

Features

- Low cost, high performance ferrite filter
- No distortion of wave forms
- Replaces individual ferrite bead filters, saving cost and space
- Provides both pin to ground and pin to pin filtering
- Effective in helping meet requirements of FCC, VDE, EN55022 and Japan's VCCI
- Short, space saving .318" footprint
- Interchangeable with standard D-subminiature connectors
- Can be installed directly over PCB trace pattern with no shorting
- 4-40 UNC locking insert eliminates loose hardware
- Metal shielding front shell
- Gold plated contacts
- RoHS compliant versions available (replace 56- with 56F)

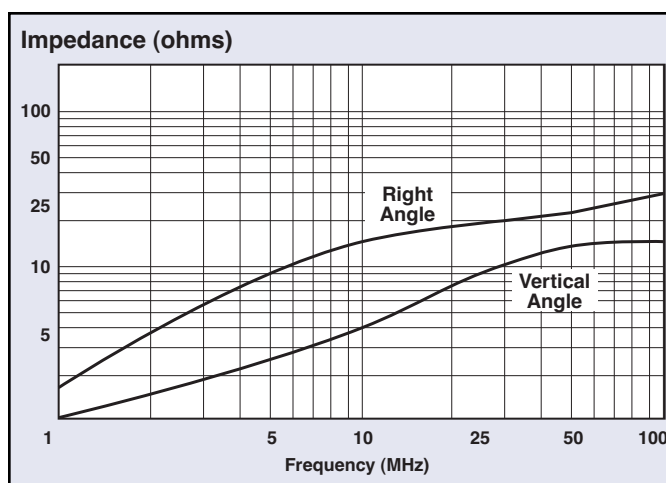

Mechanical Specifications

Front Shell. Steel (Tin plated)

Housing UL 94V-0 Rated thermoplastic, black

Contacts Phosphor bronze (sockets)
or brass (pins)

Contact

Plating Gold Flash (<10µ in.) over nickel

Operating

Temperature. -40°C to +105°C

Electrical Specifications

Frequency (MHz)	Impedance (Ohms)	
	Right Angle	Vertical
1	2	1
10	15	6
30	20	10
50	23	12
100	27	15

Frequency

Range 10 – 300 MHz

Current

Rating. 5 Amps

Dielectric


Withstand Voltage . . 1000 VAC for one minute

Insulation

Resistance 1000 megohms Min. @ 500VDC

Series F Ferrite Filtered Connectors

Pin Contact – Right Angle Mount

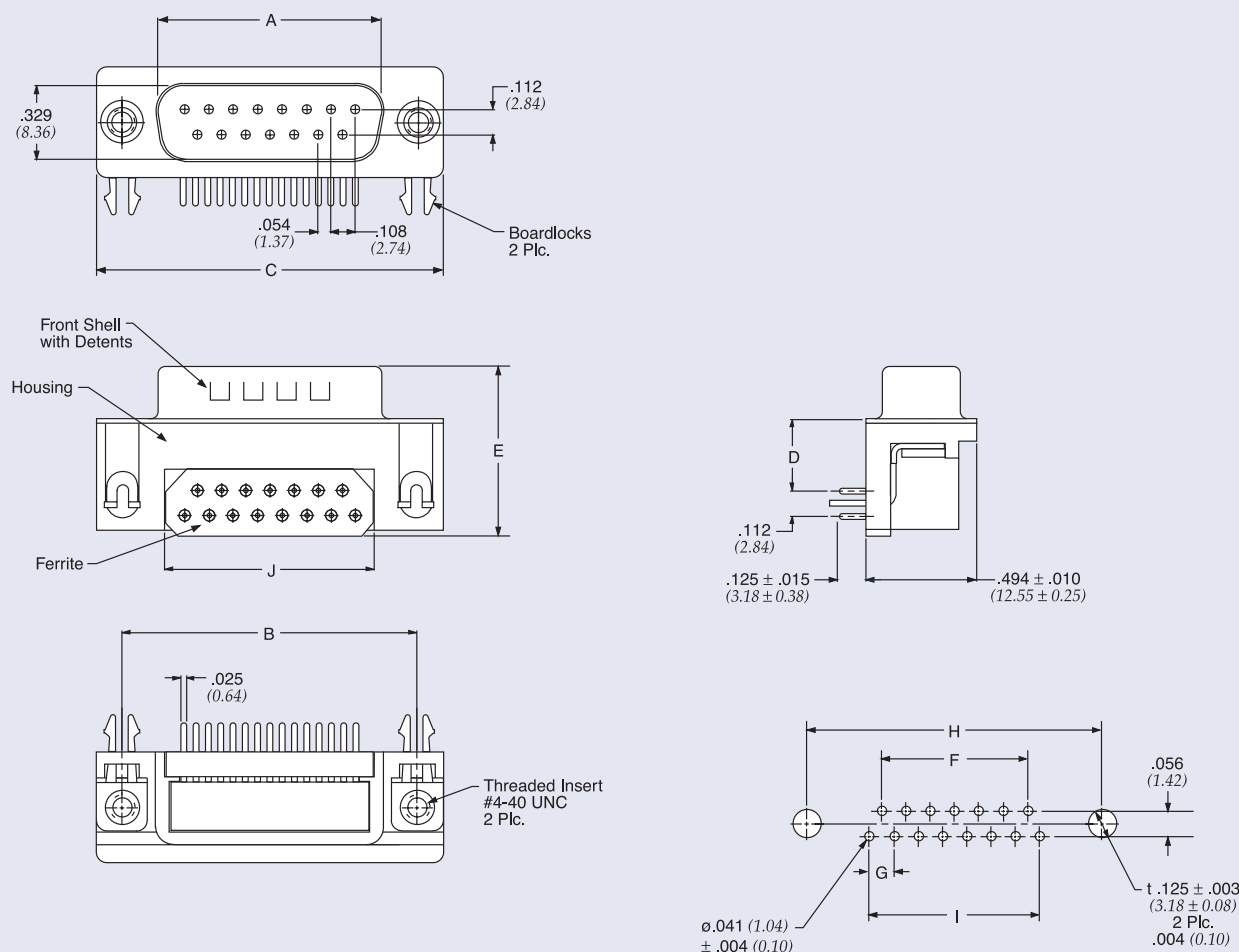




Part Number	Description	Typ. Impedance (Ohms)		Frequency Range	A +/-	B +/-	C +/-	D +/-	E +/-	F +/-	G +/-	H +/-	I +/-	J +/-
		30 MHz	100 MHz		0.010 (0.25)	0.005 (0.13)	0.015 (0.38)	0.010 (0.25)	0.015 (0.38)	0.005 (0.13)	0.004 (0.10)	0.005 (0.13)	0.005 (0.13)	0.005 (0.13)
€ 56-402-001	D-Sub 9 pin	20	27	10 MHz to 300 MHz	0.666 (16.92)	0.984 (25.00)	1.213 (30.81)	0.318 (8.08)	0.751 (19.10)	0.324 (8.22)	0.108 (2.74)	0.984 (25.00)	0.432 (10.98)	0.606 (15.40)
€ 56-412-001	D-Sub 15 pin				0.994 (25.25)	1.312 (33.32)	1.541 (39.14)	0.318 (8.08)	0.751 (19.10)	0.648 (16.46)	0.108 (2.74)	1.312 (33.32)	0.756 (19.20)	0.929 (23.60)
€ 56-422-001	D-Sub 25 pin				1.534 (38.96)	1.852 (47.04)	2.088 (53.04)	0.318 (8.08)	0.751 (19.10)	1.196 (30.36)	0.110 (2.76)	1.852 (47.04)	1.304 (31.12)	1.476 (37.50)

€ Also available through API's authorized European distributors/agents.





Dimensions in inches (mm)

Series F Ferrite Filtered Connectors

Socket Contact – Right Angle Mount

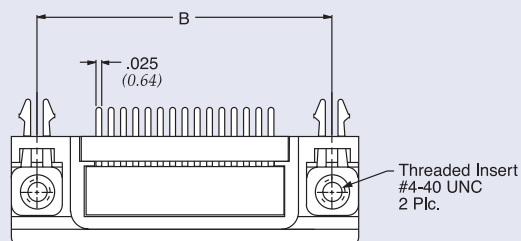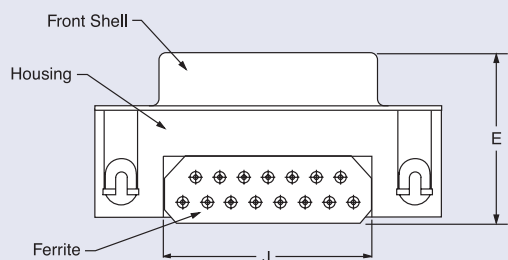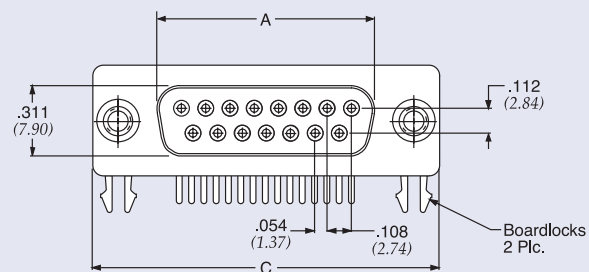

*High-Density

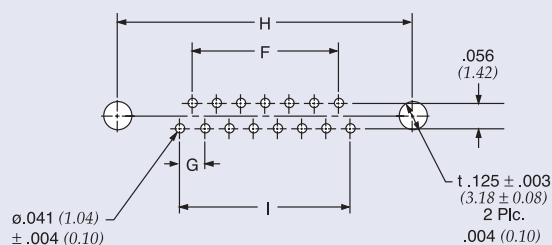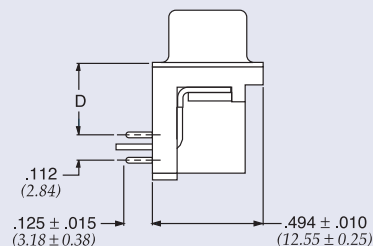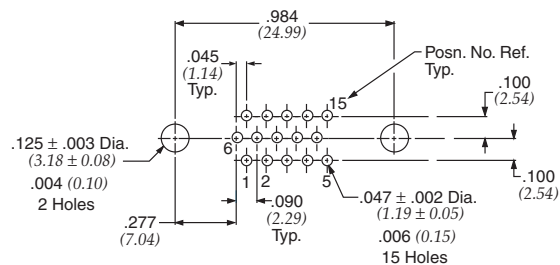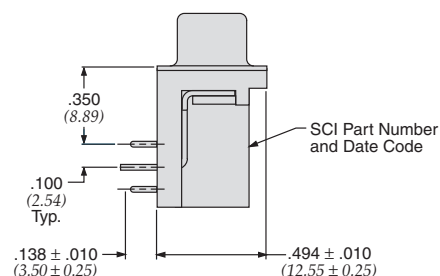


Part Number	Description	Typ. Impedance (Ohms)		Frequency Range	A +/- 0.010 <i>(0.25)</i>	B +/- 0.005 <i>(0.13)</i>	C +/- 0.015 <i>(0.38)</i>	D +/- 0.010 <i>(0.25)</i>	E +/- 0.015 <i>(0.38)</i>	F +/- 0.005 <i>(0.13)</i>	G +/- 0.004 <i>(0.10)</i>	H +/- 0.005 <i>(0.13)</i>	I +/- 0.005 <i>(0.13)</i>	J +/- 0.005 <i>(0.13)</i>
		30 MHz	100 MHz											
€ 56-404-001	D-Sub 9 socket	20	27	10 MHz to 300 MHz	0.643 <i>(16.33)</i>	0.984 <i>(25.00)</i>	1.213 <i>(30.81)</i>	0.318 <i>(8.08)</i>	0.755 <i>(19.20)</i>	0.324 <i>(8.22)</i>	0.108 <i>(2.74)</i>	0.984 <i>(25.00)</i>	0.432 <i>(10.98)</i>	0.606 <i>(15.40)</i>
€ 56-414-001	D-Sub 15 socket				0.971 <i>(24.66)</i>	1.312 <i>(33.32)</i>	1.541 <i>(39.14)</i>	0.318 <i>(8.08)</i>	0.755 <i>(19.20)</i>	0.648 <i>(16.46)</i>	0.108 <i>(2.74)</i>	1.312 <i>(33.32)</i>	0.756 <i>(19.20)</i>	0.929 <i>(23.60)</i>
€ 56-424-001	D-Sub 25 socket				1.511 <i>(38.38)</i>	1.852 <i>(47.04)</i>	2.088 <i>(53.04)</i>	0.318 <i>(8.08)</i>	0.755 <i>(19.20)</i>	1.196 <i>(30.36)</i>	0.110 <i>(2.76)</i>	1.852 <i>(47.04)</i>	1.304 <i>(31.12)</i>	1.476 <i>(37.50)</i>
€ 56-414-001-HD	Hi-Density 15 socket	16	26		0.643 <i>(16.33)</i>	0.984 <i>(25.00)</i>	1.213 <i>(30.81)</i>	★ See inset drawing						

€ Also available through API's authorized European distributors/agents.

Dimensions in inches (*mm*)

Series F Ferrite Filtered Connectors

Pin Contact – Vertical Mount

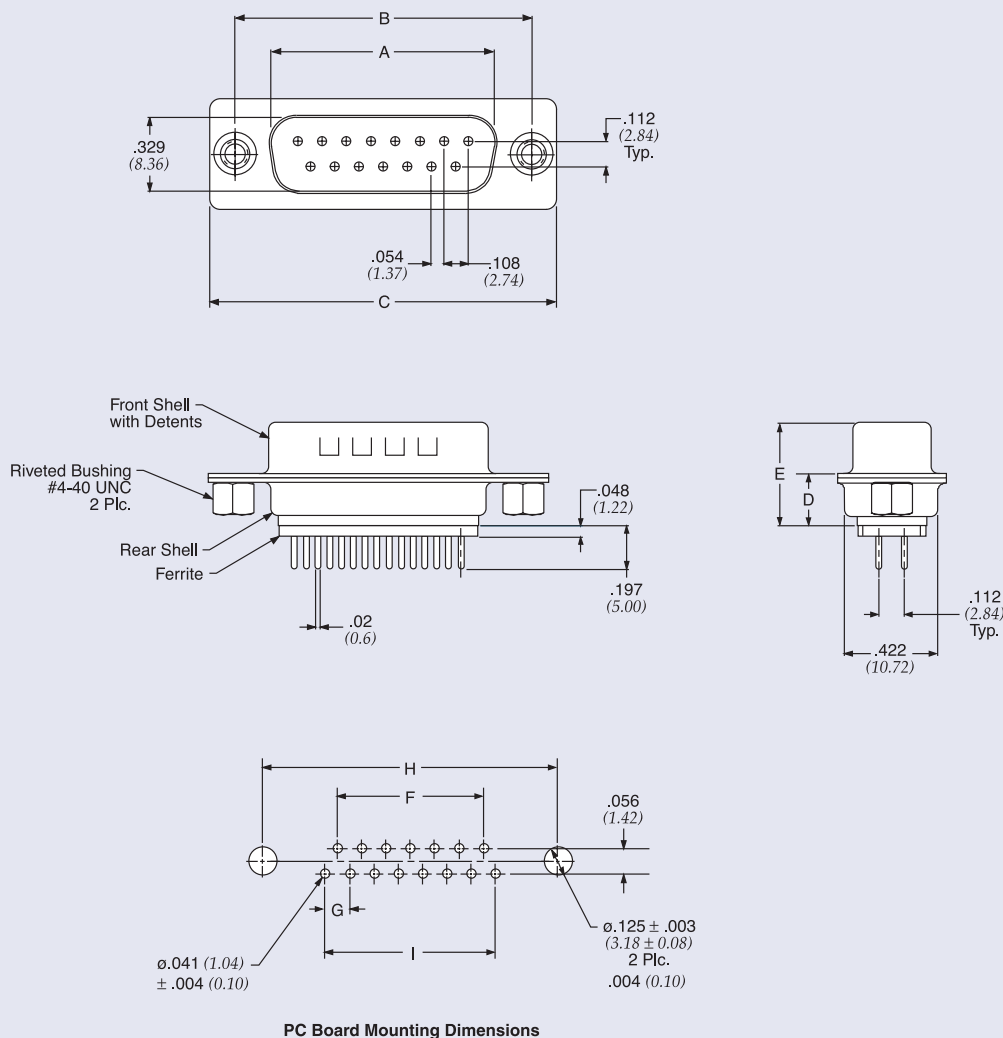


Part Number	Description	Typ. Impedance (Ohms)		Frequency Range	A +/-	B +/-	C +/-	D +/-	E +/-	F +/-	G +/-	H +/-	I +/-
		30 MHz	100 MHz		0.010 (0.25)	0.005 (0.13)	0.015 (0.38)	0.010 (0.25)	0.015 (0.38)	0.005 (0.13)	0.004 (0.10)	0.005 (0.13)	0.005 (0.13)
56-407-001	D-Sub 9 pin	10	15	10 MHz to 300 MHz	0.666 (16.92)	0.984 (25.00)	1.213 (30.81)	0.236 (5.99)	0.468 (11.88)	0.324 (8.22)	0.108 (2.74)	0.984 (25.00)	0.432 (10.98)
56-417-001	D-Sub 15 pin				.994 (25.25)	1.312 (33.32)	1.541 (39.14)	0.236 (5.99)	0.468 (11.88)	0.648 (16.46)	0.108 (2.74)	1.312 (33.32)	0.756 (19.20)
56-427-001	D-Sub 25 pin				1.534 (38.96)	1.852 (47.04)	2.088 (53.04)	0.236 (5.99)	0.468 (11.88)	1.196 (30.36)	0.110 (2.76)	1.852 (47.04)	1.304 (31.12)

Dimensions in inches (mm)

Series F Ferrite Filtered Connectors

Socket Contact – Vertical Mount

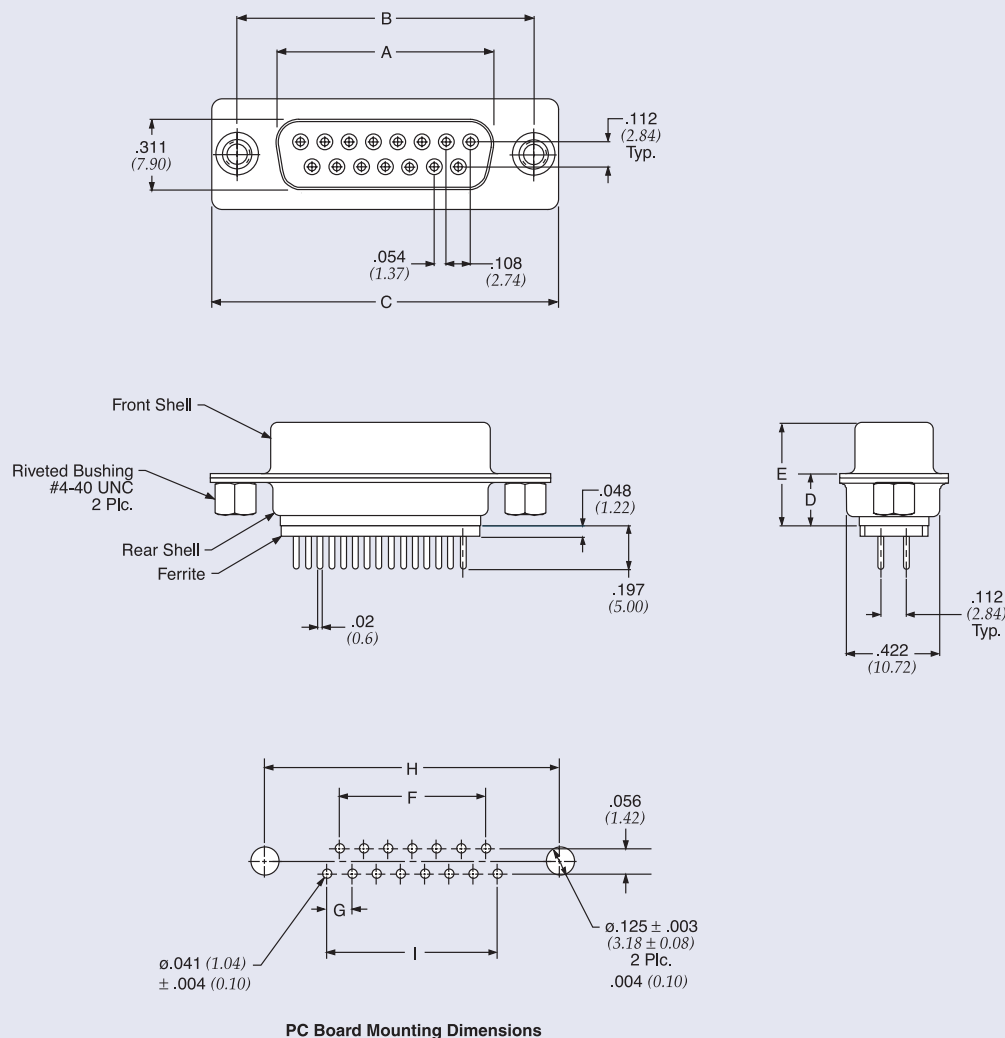

Part Number	Description	Typ. Impedance (Ohms)		Frequency Range	A +/-	B +/-	C +/-	D +/-	E +/-	F +/-	G +/-	H +/-	I +/-
		30 MHz	100 MHz		0.010 (0.25)	0.005 (0.13)	0.015 (0.38)	0.010 (0.25)	0.015 (0.38)	0.005 (0.13)	0.004 (0.10)	0.005 (0.13)	0.005 (0.13)
56-403-001	D-Sub 9 socket	10	15	10 MHz to 300 MHz	0.643 (16.33)	0.984 (25.00)	1.213 (30.81)	0.236 (5.99)	0.472 (11.98)	0.324 (8.22)	0.108 (2.74)	0.984 (25.00)	0.432 (10.98)
56-413-001	D-Sub 15 socket				.971 (24.66)	1.312 (33.32)	1.541 (39.14)	0.236 (5.99)	0.472 (11.98)	0.648 (16.46)	0.108 (2.74)	1.312 (33.32)	0.756 (19.20)
56-423-001	D-Sub 25 socket				1.511 (38.38)	1.852 (47.04)	2.088 (53.04)	0.236 (5.99)	0.472 (11.98)	1.196 (30.36)	0.110 (2.76)	1.852 (47.04)	1.304 (31.12)

Dimensions in inches (mm)

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

API Technologies:

[56-403-001](#) [56-407-001](#) [56-414-001-HD](#) [56-402-001](#) [56-417-001](#) [56-427-001](#) [56F404-001](#) [56F412-001](#) [56F424-001](#) [56F407-001](#) [56F413-001](#) [56-413-001](#) [56-422-001](#) [56-414-001](#) [56-412-001](#) [56-424-001](#) [56-423-001](#) [56-404-001](#) [56F422-001](#) [56F427-001](#) [56F414-001-HD](#) [56F417-001](#) [56F402-001](#) [56F403-001](#)