

Manual Switches

Electronic Control Rocker Switches

MML24 Series

LED, INCANDESCENT, OR NON-LIGHTED DISPLAY



PWB Mount



Panel Mount



PWB Mount
(Lighted rocker)

FEATURES

- Accepts one or two LEDs or incandescent lamps which are ordered separately
- Printed wiring board mounting or snap-in panel mounting
- Bezels and mounting clips can be furnished installed or ordered separately
- UL recognized, CSA certified

MML24 ORDER GUIDE (Catalog listing for switch, less assembled display options)

MML24K			
A			
3			
AA			
Housing Type	Mounting	Terminals	Circuitry
MML24K Black housing	A No bezel (PWB mounting) K Black bezel, mtg. clip/long sides	3 Printed wiring board 2 Solder	Insert code letters from Circuitry Chart


Electrical Data page 69
Bezels page 84
Strip and matrix mounting page 83
Mounting dimensions pages 97/98
PWB pin locations page 97
Rockers are permanently installed.

CIRCUITRY

Table with 4 columns: Silver Contacts, Gold Contacts, 2-Position, 3-Position. Rows include AA BA, AC BC with circuit diagrams.

Example: MML24KA3AA01HDRXX
Electronic control rocker switch with black housing, printed wiring board terminals; 1 pole, silver contacts; 2-position, maintained action; one circuit ON in each position; black rocker, red lens for LED display in Side 1 and no lens in Side 2.

The "MICRO SWITCH" identification is shown on this side of the switch housings.

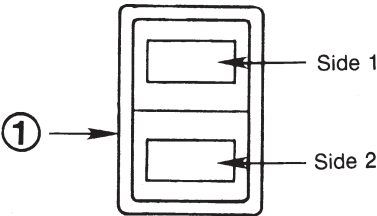

OPERATING ACTION

Table with 4 columns: 2-Position, 3-Position, and two unlabeled columns. Rows 01-07 show action types like Maint., Mom., None.

Order display options assembled to switch by adding codes below.

01 Action: Insert code numbers from Operating Action Chart
H Rocker: K Black rocker, non-lighted; H Black rocker, one lens*; F White rocker, one lens*
DRXX Lens: Side 1 (LED display: DR Red, DY Yellow, DG Green; Incand. display: LR Red, LY Yellow, LG Green, LW White); Side 2 (LED display: DR Red, DY Yellow, DG Green; Incand. display: LR Red, LY Yellow, LG Green, LW White)
Legend: 20 With legend
CUSTOMER INSTALLATION: LED (1. Order LED and receptacle, page 85. 2. Installation instructions, pages 86/88.) Incandescent Lamp (1. Order lamp/PWB receptacle or lamp/solder receptacle, page 87. 2. Installation instructions, page 88.)

Manuals

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Honeywell:

[MML24KA3AA01K](#) [MML24KA3AA05K](#) [MML24KA3AC05K](#) [MML24KK2AA01K](#)