

20-30W Single and Dual Output DC-DC Converters

Features

- ◆ Industry Standard 2" x 1.6" Footprint
- ◆ Six Sided Shielding
- ◆ Agency Approved
- ◆ 12V, 24V and 48V Inputs
- ◆ UL, CSA, EN, CE approvals
- ◆ Wide range input



Key Market Segments & Applications





Specifications		
Model	PXE20	PXE30
Max Output Power	20W	30W
Voltage Accuracy	±2%	±1%
Voltage Adjustment	±10%	
Minimum Load, each output (1)	10%	10%
Line Regulation	±0.2% for single, ±0.5% for dual	
Load Regulation (25% to 100%)	Single ±0.5%, Dual ±3%	Single ±0.5%, Dual ±1%
Cross Regulation (25% to 100%)	Dual ±5%	
Ripple and Noise (P-P)	Single: 75mV; Dual: 100mV	
Start up time	20ms - 1100ms typ.	10 - 25ms typ.
Remote on/off (3)	Positive Logic: ON: Open or 3.5-12V, OFF Short or <1.2V	
Temperature Coefficient	<±0.02%/°C	
Operating Temperature	-40 to +100°C, see derating curve	
Maximum Case Temperature	100°C (Over temperature protection at 115°C - PXE30 model)	
Storage Temperature	-55 to 105°C	
Thermal Shock	MIL-STD-810D	
Relative Humidity (non condensing)	5 to 95%	
Transient Response (25% step load change)	500us recovery	300us recovery
Overvoltage Protection (Zener clamp)	3.3V: 3.9V, 5V: 6.2V, 12V: 15V, 15V: 18V	
Overcurrent and Short Circuit Protection	Typically at 150%, hiccup with self recovery	
Input Surge Voltage (Maximum for 100ms)	12V input: 36V, 24V input: 50V, 48V input: 100V	
Reflected input ripple (peak to peak) (2)	25mA	30mA
Isolation Voltage	1600VDC minimum (Input-Output, Input-Case)	
Isolation Resistance	10 ⁹ Ohms minimum	
Isolation Capacitance (max)	300pF	1000pF
Typical Switching Frequency (Fixed)	300kHz	
MTBF (BELLCORE TR-NWT-000332)	1,976,000 hours	1,535,000 hours
Vibration	10 - 55Hz, 2G, 30 minutes each X, Y, Z axis	
Conducted and Radiated Emissions	See Installation Diagrams	
Immunity	EN61000-4-2, -3, -4, -5, -6 Pref Criteria 2	
Safety Agency Approval	IEC/UL/CSA/EN 62368-1, 60950-1, CE Mark	
Size (L x W x H)	2 x 1.6 x 0.4"	
Weight	1.69 oz (48g)	
Warranty	Three Year	

Notes:

- (1) To meet regulation & noise specifications. Operation at zero load will not damage the device
- (2) 12uH source impedance in series with + input
- (3) Max sink current 20mA (PXE20), 2.5mA (PXE30); The on/off pin is referenced to the negative input

Model Selector					
Output Volt (V)	Output Curr (A)	Output Power (W)	Input Volt (VDC)	Model	Eff.(%)
Single Outputs					
3.3	6.0	20	9 - 18	PXE30-12S3P3	85
3.3	6.0	20	10 - 40	PXE30-24WS3P3	87
3.3	6.0	20	18 - 36	PXE30-24S3P3	86
3.3	6.0	20	18 - 75	PXE30-48WS3P3	87
3.3	6.0	20	36 - 75	PXE30-48S3P3	87
5	4.0	20	9 - 36	PXE20-24WS05	79
5	4.0	20	18 - 75	PXE20-48WS05	80
5	6.0	30	9 - 18	PXE30-12S05	87
5	6.0	30	10 - 40	PXE30-24WS05	87
5	6.0	30	18 - 36	PXE30-24S05	88
5	6.0	30	18 - 75	PXE30-48WS05	88
5	6.0	30	36 - 75	PXE30-48S05	89
12	1.67	20	9 - 36	PXE20-24WS12	81
12	1.67	20	18 - 75	PXE20-48WS12	81
12	2.5	30	9 - 18	PXE30-12S12	88
12	2.5	30	10 - 40	PXE30-24WS12	87
12	2.5	30	18 - 36	PXE30-24S12	89
12	2.5	30	18 - 75	PXE30-48WS12	87
12	2.5	30	36 - 75	PXE30-48S12	90
15	1.33	20	9 - 36	PXE20-24WS15	81
15	1.33	20	18 - 75	PXE20-48WS15	81
15	2.0	30	9 - 18	PXE30-12S15	88
15	2.0	30	10 - 40	PXE30-24WS15	88
15	2.0	30	18 - 36	PXE30-24S15	89
15	2.0	30	18 - 75	PXE30-48WS15	88
15	2.0	30	36 - 75	PXE30-48S15	90
Dual Outputs					
±5	±2.0	20	9 - 36	PXE20-24WD05	79
±5	±2.0	20	18 - 75	PXE20-48WD05	79
±12	±0.833	20	9 - 36	PXE20-24WD12	81
±12	±0.833	20	18 - 75	PXE20-48WD12	83
±12	±1.25	30	9 - 18	PXE30-12D12	87
±12	±1.25	30	18 - 36	PXE30-24D12	88
±12	±1.25	30	36 - 75	PXE30-48D12	88
±15	±0.666	20	9 - 36	PXE20-24WD15	82
±15	±0.666	20	18 - 75	PXE20-48WD15	84
±15	±1.0	30	9 - 18	PXE30-12D15	87
±15	±1.0	30	18 - 36	PXE30-24D15	88
±15	±1.0	30	36 - 75	PXE30-48D15	88

Pinout			
PIN #	Single Output	Function	Dual Output
1	+ Input		+ Input
2	- Input		- Input
4	Remote on/off		Remote on/off
5	No Pin		+ Output
6	+ Output		Common
7	- Output		- Output
8	Trim		Trim

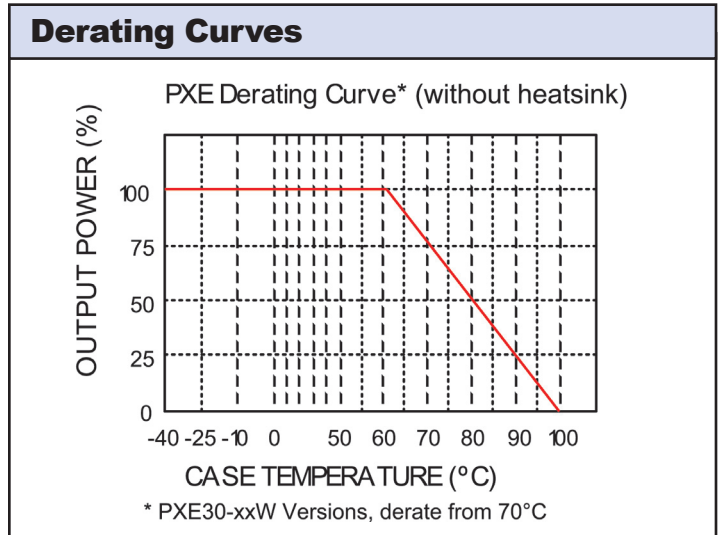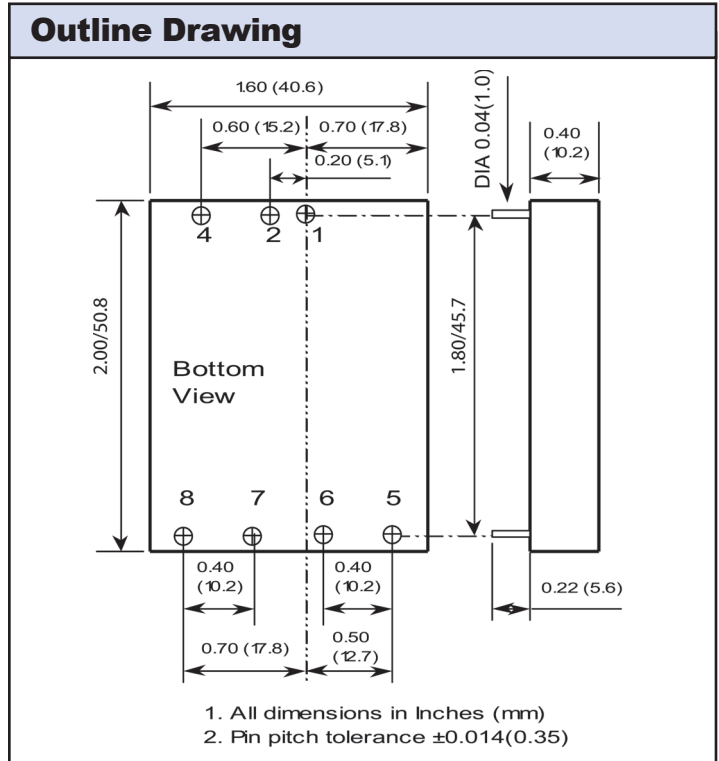

Heat Sink (0.22" high)

HAPXE (includes thermal adhesive pad)
HAPXECLIP (two clips required when used)

Other Industrial Products

CC-E 1.5-25W, 5 to 48VDC input
PAQ }
PAH } 50 - 700W quarter, half & full bricks
PAF }

For Additional Information, please visit
<https://product.tdk.com/info/en/products/power/index.html>

