

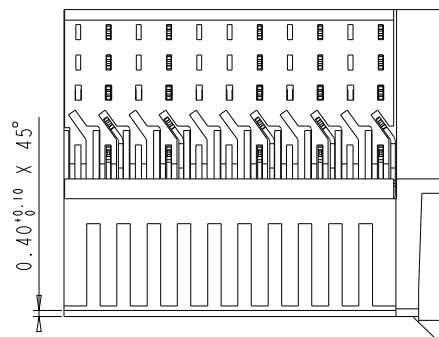
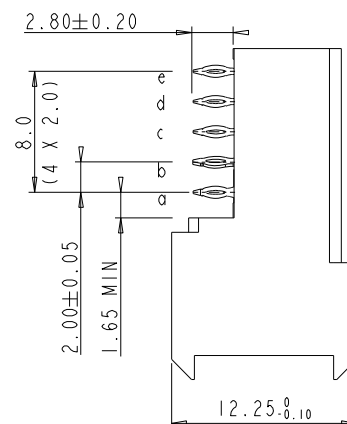


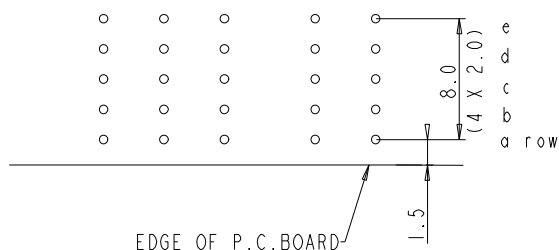

□ EMPTY CAVITY
 ■ CAVITY LOADED WITH CONTACT

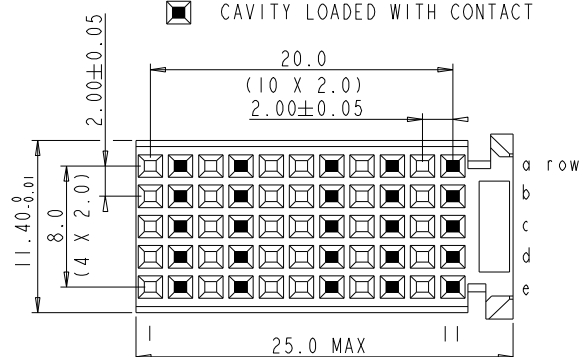

PERFORMANCE CHARACTERISTICS

CURRENT RATING 1.5A AT 20°C (FULLY LOADED)
 1 A AT 70°C (FULLY LOADED)
 RATED VOLTAGE : 500 V AC (CONT /CONT)
 OPERATING TEMPERATURE : -55°C TO 125°C
 CONTACT RESISTANCE 20 mΩ MAX
 INSERTION FORCE : 0.75N MAX/CONT
 EXTRACTION FORCE : 0.15N MIN/CONT
 INSULATION RESISTANCE : 10⁴ MΩ MIN

- NOTES 1. " " LEAD FREE INDICATOR : LF=LEAD FREE
 " " PERFORMANCE LEVEL INDICATION (REF DWG NO.BSC .201844.003)
 2. THIS PRODUCT IS CSA APPROVED.
 THIS PRODUCT IS UL RECOGNIZED.
 3. FOR RECOMMENDED PTH DIMENSIONS REFER DRAWING : BS.A.201572.001
 4. THIS PRODUCT (LF) MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008

Material			Spec ref			
Mat code			✓	tolerance IDEC ± 0.2 IDEC 2DEC ± 0.1 2DEC ANGLES ± 1° HOEKEN	projection 	MM 
Heattreat						
Plating/Finish						
Dr	M.Fret	17-05-99			size A4	Scale 2.000
Eng			Product family MILLIPACS			
Chr			Model Name		ECN	DG05-0278
Appr			Model Revision		REL Level	
		title MPACS 5+2R RA RCP CONN TYPE C		dwg no BSC202468015		Rev B
Pro/E file	catalog		HM2P30PACA20 --- CUSTOMER DRAWING		sheet 1 of 1	

LAY-OUT
 P.C.B. - HOLE

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[FCI / Amphenol:](#)

[HM2R30PACA20N9LF](#)