



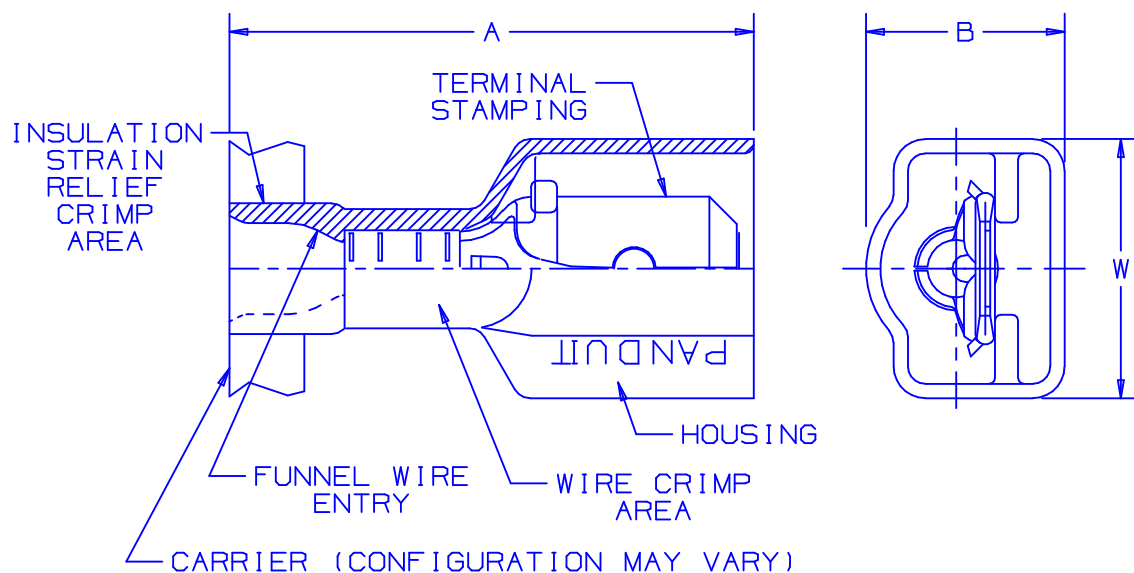


- NOTES:
1. USED FOR:
 - A. 600V MAX VOLTAGE RATING
 - B. 221°F (105°C) MAX TEMP RATING
 - C. STRANDED COPPER WIRE ONLY
 2. WIRE STRIP LENGTH: $9/32^{+1/32}_{-0}$ (7.1 $^{+.8}_{-0}$)
 3. MATERIAL:
 - A. STAMPING: NICKEL PLATED BRASS
 - B. HOUSING : PREMIUM GRADE NYLON FOR SUPERIOR STRAIN RELIEF INSULATION CRIMPING
 4. PACKAGING: -2K = 2000 PCS CONTINUOUS MOLDED STRIP CARRIER
 5. DIMENSIONS IN BRACKETS ARE IN MILLIMETERS OR mm²

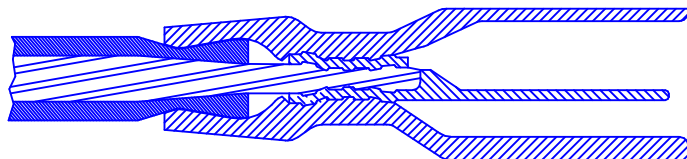

SECTION VIEW OF CRIMPED DISCONNECT

SECTION VIEW OF CRIMPED DISCONNECT										TOOL CHART RECOMMENDED PRESSES CP-861, CP-860 CP-851, CP-862
PART NUMBER		TAB SIZE	WIRE RANGE AWG (mm ²)	COLOR	MAX WIRE INSULATION DIAMETER	MIN WIRE INSULATION DIAMETER	DIMENSIONS in			
PREFIX	PK						A $\pm .03$ (.8)	B $\pm .02$ (.5)	W $\pm .02$ (.5)	
DPF18-250FIM	-2K	.250 X .032 (6.3 X 0.8)	22-18 (0.5-1.5)	RED	.133 (3.38)	.060 (1.52)	.90 (22.9)	.29 (7.4)	.41 (10.4)	CD-800-10 CD9-10B
DPF14-250FIM	-2K	.250 X .032 (6.3 X 0.8)	16-14 (1.5-2.5)	BLUE	.156 (3.96)	.090 (2.29)	.90 (22.9)	.29 (7.4)	.41 (10.4)	CD-800-11 CD9-11B



A41514_05

05	7/03	KLFU		ADDED INTERNAL SERRATIONS ADDED CA9 TO TOOL CHART							 PANDUIT CORP. TINLEY PARK, ILLINOIS
04	1/01	RM	SKB	FILESPEC WAS N41514AA_PCD_03	8933		CCH		JAC		
03	10/98	JD		MATERIAL WAS TIN PLATED ADDED CP-862, CA9	07845						
02	10/96	TM	RS	UPDATED NOTES AND DIMENSIONS	05134		DH		LA		
REV	DATE	BY	CHK	DESCRIPTION	ECN	QA	PM	SUP	CUST	APP	DRAWN BY KC CHK'D SCALE  DRAWING NO A41514

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Panduit:

[DPF14-250FIM-2K](#) [DPF18-250FIM-2K](#)