


MICRO SWITCH
 a Honeywell Division
 FED. MFG. CODE 91929

SWITCH-BASIC

CATALOG LISTING
V3-3120
 CK-X4134

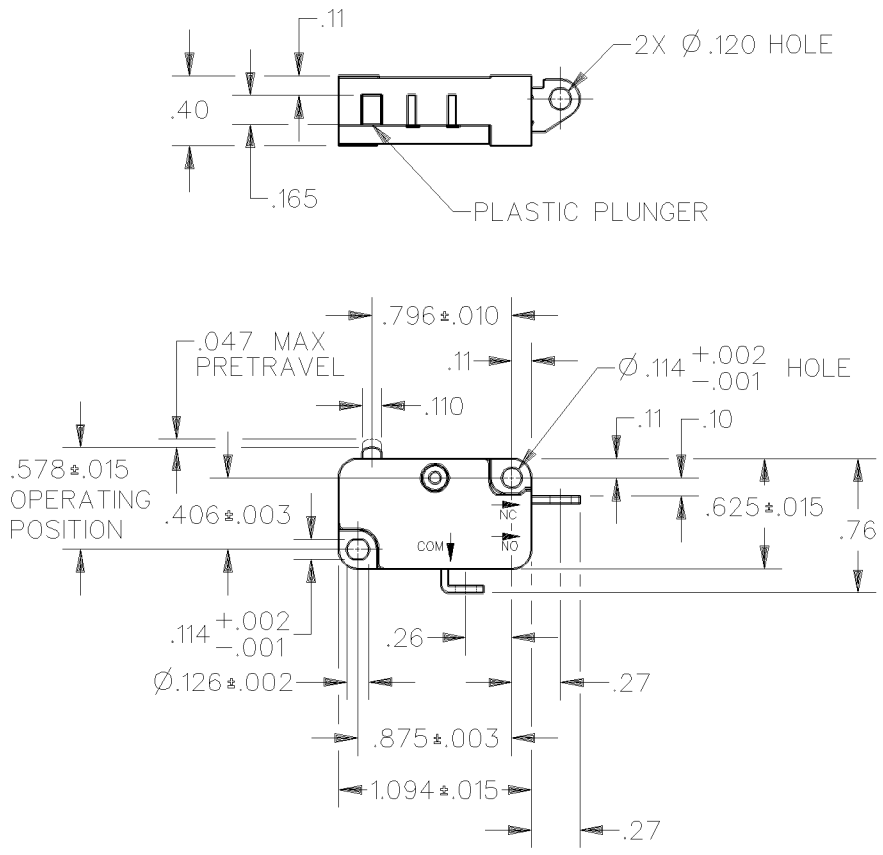

NOTE
 1 - TERMINALS ARE SILVER PLATED FOR SOLDERING

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION

CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL	DO NOT SCALE PRINT
OPERATING FORCE— — —150 GRAMS MAX	CONTACT ARRANGEMENT S P N C	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE ONE PLACE (.0) ±.030 TWO PLACE (.00) ±.015 THREE PLACE (.000) ±.005 ANGLES ± WEIGHT .016 LB	
RELEASE FORCE— — —15 GRAMS MIN	L83 15.1A 1/2HP 125, <u>250</u> VAC 1/2A 125 VDC, 1/4A 250 VDC 5A 125 VAC "L" 		
DIFFERENTIAL TRAVEL— — —.002—.010			
OVERTRAVEL— — — — —.050 MIN			
FREE POSITION— — — — —.625 MAX			
RELEASE TRAVEL— — — — —.010 MIN			

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Honeywell:](#)

[V3-3120](#)