


## NPN Bipolar RF Transistor

- For low noise, high-gain amplifiers up to 2 GHz
- For linear broadband amplifiers
- $f_T = 8 \text{ GHz}$ ,  $NF_{\min} = 1 \text{ dB}$  at 900 MHz
- Pb-free (RoHS compliant) package
- Qualification report according to AEC-Q101 available

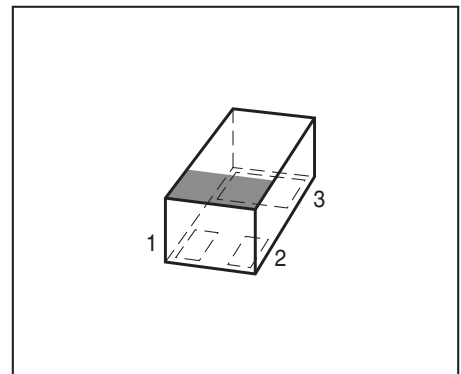

**ESD (Electrostatic discharge) sensitive device, observe handling precaution!**

| Type     | Marking | Pin Configuration |       |       | Package  |
|----------|---------|-------------------|-------|-------|----------|
| BFR193L3 | RC      | 1 = B             | 2 = E | 3 = C | TSLP-3-1 |

**Maximum Ratings** at  $T_A = 25^\circ\text{C}$ , unless otherwise specified

| Parameter                                                            | Symbol           | Value       | Unit             |
|----------------------------------------------------------------------|------------------|-------------|------------------|
| Collector-emitter voltage                                            | $V_{CEO}$        | 12          | V                |
| Collector-emitter voltage                                            | $V_{CES}$        | 20          |                  |
| Collector-base voltage                                               | $V_{CBO}$        | 20          |                  |
| Emitter-base voltage                                                 | $V_{EBO}$        | 2           |                  |
| Collector current                                                    | $I_C$            | 80          | mA               |
| Base current                                                         | $I_B$            | 10          |                  |
| Total power dissipation <sup>1)</sup><br>$T_S \leq 89^\circ\text{C}$ | $P_{\text{tot}}$ | 580         | mW               |
| Junction temperature                                                 | $T_J$            | 150         | $^\circ\text{C}$ |
| Storage temperature                                                  | $T_{\text{Stg}}$ | -55 ... 150 |                  |

### Thermal Resistance

| Parameter                                | Symbol            | Value | Unit |
|------------------------------------------|-------------------|-------|------|
| Junction - soldering point <sup>2)</sup> | $R_{\text{thJS}}$ | 105   | K/W  |

<sup>1)</sup>  $T_S$  is measured on the collector lead at the soldering point to the pcb

<sup>2)</sup> For calculation of  $R_{\text{thJA}}$  please refer to Application Note AN077 (Thermal Resistance Calculation)

**Electrical Characteristics** at  $T_A = 25^\circ\text{C}$ , unless otherwise specified


| Parameter                                                                           | Symbol        | Values |      |      | Unit          |
|-------------------------------------------------------------------------------------|---------------|--------|------|------|---------------|
|                                                                                     |               | min.   | typ. | max. |               |
| DC Characteristics                                                                  |               |        |      |      |               |
| Collector-emitter breakdown voltage<br>$I_C = 1\text{ mA}, I_B = 0$                 | $V_{(BR)CEO}$ | 12     | -    | -    | V             |
| Collector-emitter cutoff current<br>$V_{CE} = 20\text{ V}, V_{BE} = 0$              | $I_{CES}$     | -      | -    | 100  | $\mu\text{A}$ |
| Collector-base cutoff current<br>$V_{CB} = 10\text{ V}, I_E = 0$                    | $I_{CBO}$     | -      | -    | 100  | nA            |
| Emitter-base cutoff current<br>$V_{EB} = 1\text{ V}, I_C = 0$                       | $I_{EBO}$     | -      | -    | 1    | $\mu\text{A}$ |
| DC current gain<br>$I_C = 30\text{ mA}, V_{CE} = 8\text{ V}, \text{pulse measured}$ | $h_{FE}$      | 70     | 100  | 140  | -             |

**Electrical Characteristics** at  $T_A = 25^\circ\text{C}$ , unless otherwise specified


| Parameter                                                                                                                                                                                                                                                                   | Symbol        | Values |            |        | Unit |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|--------|------------|--------|------|
|                                                                                                                                                                                                                                                                             |               | min.   | typ.       | max.   |      |
| AC Characteristics (verified by random sampling)                                                                                                                                                                                                                            |               |        |            |        |      |
| Transition frequency<br>$I_C = 50\text{ mA}$ , $V_{CE} = 8\text{ V}$ , $f = 500\text{ MHz}$                                                                                                                                                                                 | $f_T$         | 6      | 8          | -      | GHz  |
| Collector-base capacitance<br>$V_{CB} = 10\text{ V}$ , $f = 1\text{ MHz}$ , $V_{BE} = 0$ ,<br>emitter grounded                                                                                                                                                              | $C_{cb}$      | -      | 0.63       | 0.9    | pF   |
| Collector emitter capacitance<br>$V_{CE} = 10\text{ V}$ , $f = 1\text{ MHz}$ , $V_{BE} = 0$ ,<br>base grounded                                                                                                                                                              | $C_{ce}$      | -      | 0.22       | -      |      |
| Emitter-base capacitance<br>$V_{EB} = 0.5\text{ V}$ , $f = 1\text{ MHz}$ , $V_{CB} = 0$ ,<br>collector grounded                                                                                                                                                             | $C_{eb}$      | -      | 2.25       | -      |      |
| Minimum noise figure<br>$I_C = 10\text{ mA}$ , $V_{CE} = 8\text{ V}$ , $Z_S = Z_{Sopt}$ ,<br>$f = 900\text{ MHz}$<br>$I_C = 10\text{ mA}$ , $V_{CE} = 8\text{ V}$ , $Z_S = Z_{Sopt}$ ,<br>$f = 1.8\text{ GHz}$                                                              | $NF_{min}$    | -<br>- | 1<br>1.6   | -<br>- | dB   |
| Power gain, maximum available <sup>1)</sup><br>$I_C = 30\text{ mA}$ , $V_{CE} = 8\text{ V}$ , $Z_S = Z_{Sopt}$ ,<br>$Z_L = Z_{Lopt}$ , $f = 900\text{ MHz}$<br>$I_C = 30\text{ mA}$ , $V_{CE} = 8\text{ V}$ , $Z_S = Z_{Sopt}$ ,<br>$Z_L = Z_{Lopt}$ , $f = 1.8\text{ GHz}$ | $G_{ma}$      | -<br>- | 19<br>12.5 | -<br>- |      |
| Transducer gain<br>$I_C = 30\text{ mA}$ , $V_{CE} = 8\text{ V}$ , $Z_S = Z_L = 50\Omega$ ,<br>$f = 900\text{ MHz}$<br>$I_C = 30\text{ mA}$ , $V_{CE} = 8\text{ V}$ , $Z_S = Z_L = 50\Omega$ ,<br>$f = 1.8\text{ GHz}$                                                       | $ S_{21e} ^2$ | -<br>- | 14.5<br>9  | -<br>- |      |

<sup>1)</sup>  $G_{ma} = |S_{21} / S_{12}| (k - (k^2 - 1)^{1/2})$

**Total power dissipation  $P_{\text{tot}} = f(T_S)$**

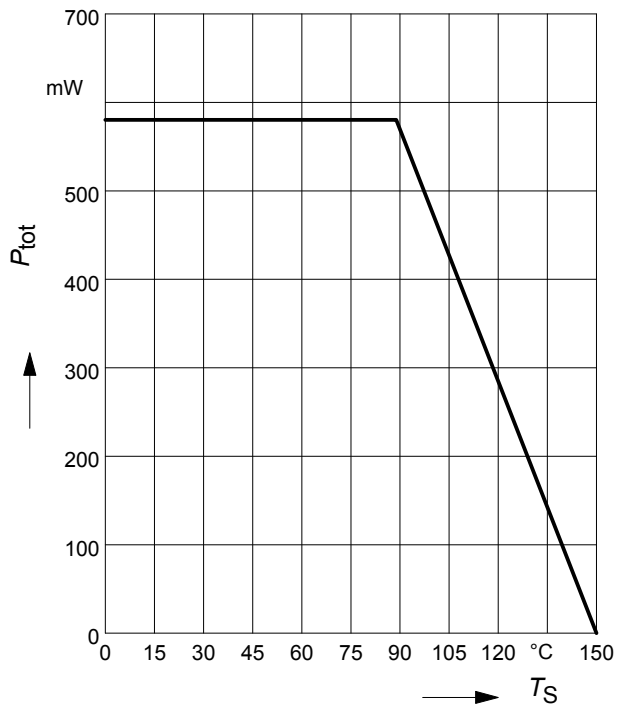


## Package Outline

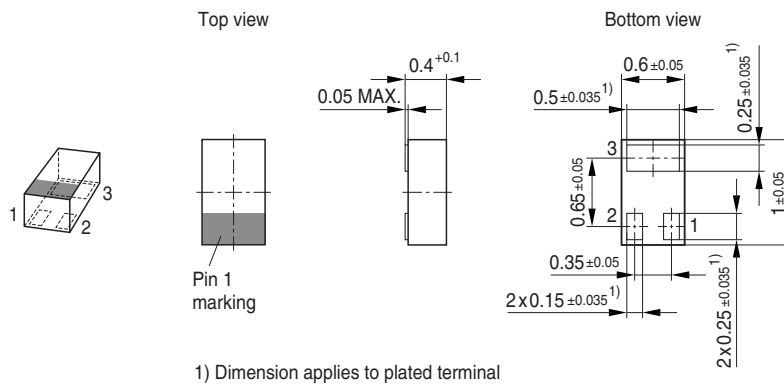


## Foot Print

For board assembly information please refer to Infineon website "Packages"

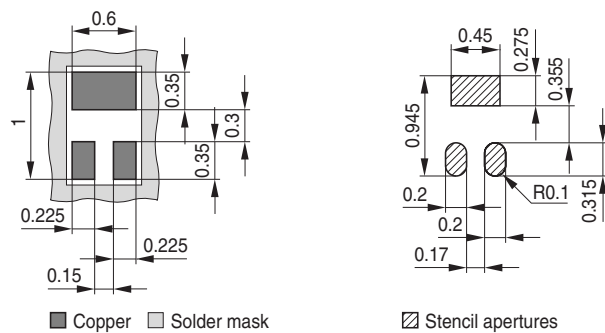


## Marking Layout (Example)

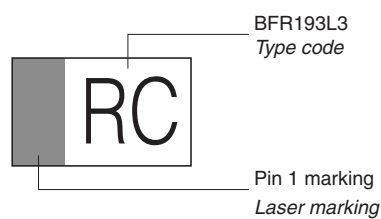

## Standard Packing

Reel ø180 mm = 15.000 Pieces/Reel

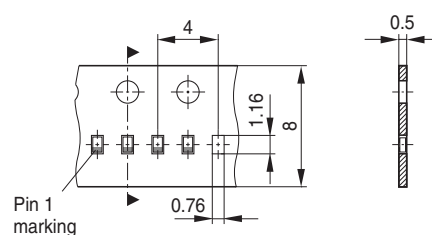

**Edition 2009-11-16**

**Published by  
Infineon Technologies AG  
81726 Munich, Germany**

**© 2009 Infineon Technologies AG  
All Rights Reserved.**

### **Legal Disclaimer**

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics. With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation, warranties of non-infringement of intellectual property rights of any third party.

### **Information**

For further information on technology, delivery terms and conditions and prices, please contact the nearest Infineon Technologies Office ([<www.infineon.com>](http://www.infineon.com)).

### **Warnings**

Due to technical requirements, components may contain dangerous substances. For information on the types in question, please contact the nearest Infineon Technologies Office.

Infineon Technologies components may be used in life-support devices or systems only with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Infineon:](#)

[BFR 193L3 E6327](#)